

NASTRO




THE WALL TRANSFORMS; BI-EMISSION LIGHT,
INSTALLABLE VERTICALLY AND
HORIZONTALLY

Private Villa, Rome | A. Castrignano



Nastro

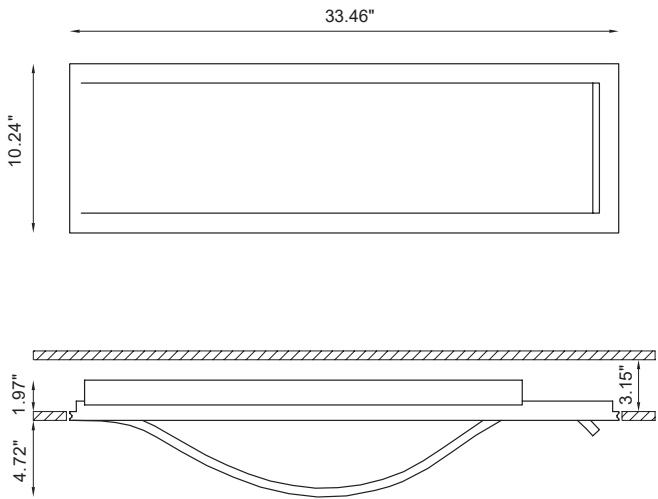

OTHER AVAILABLE CODES

BU2979.27.AC	<i>lens</i>	120°
	<i>light color</i>	2700K

TECHNICAL FEATURES

Code	BU2979.AC
Type	Wall and ceiling half recessed
Material	AC: AirCoral®
Absorption capacity*	414.63 ft²
Weight	24.25 lbs
Mounting	Wall and ceiling mounting
IP rating	IP40
Control gear	Dimmable constant current driver (included)
Cut out for plasterboard	33.86 × 10.63 in
Lamp type	LED 500mA
Lamp wattage	2 × 6.5W
Luminous efficacy	2 × 930 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K
Light hole	-
Voltage connection	350mA - 50/60Hz
CRI	>90
Note	Extra white satin glass fixed by screws. Vertical and horizontal mounting.

Other available light colors:
2700K, 4000K (on request).

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²