

Nebular is a round LED wall mounted luminaire with a protection rating of IP55. It is available in 3 color temperatures and 5 standard finishes.



MADE IN THE U.S.A.

Fixture Dimensions
See Drawing on page 2.

TECHNICAL DATA

Wattage / Input	30W (120-277VAC)
Power Supply	Integral 0-10V Dimming
Construction	Body: Low Copper Alloy Cast Aluminum Lens: UV Stabilized Polycarbonate
CCT	3000K, 4000K, 5000K
Finishes	5 Standard, Custom RAL. See Below.
Fixture Dimensions	Ø11.88 x 7.69"
IP Rating	IP55
IK Rating	-

ORDERING INFORMATION

Example: NEB-L-FL-1-03-1-C-X-0.


NEB-L	-		-		-	1	-	C	-	X	-	0
Model #	Wattage / CCT	Body	Finish	Grill/Face	Driver	Lens	Options					
NEB-L	FL - 30W, 3000K FM - 30W, 4000K FN - 30W, 5000K	1 - Surface Mount No Conduit Entries 0 - Surface Mount 2 Conduit Entries 2 - Semi Recessed	11 - White Suede 02 - Black Suede 03 - Gray TS - Silver 18 - Tex. Bronze 99 - Custom	1 - Standard	C - 120-277VAC 0-10V Integral	X - Opal Polycarbonate	0 - None					

Job Name/Date:


Fixture Type Designation:

FIXTURE DIMENSIONS


CAST ALUMINUM BODY
POLYESTER POWDER COATED
COLOR TO BE SPECIFIED
(SEE FINISH CHART)

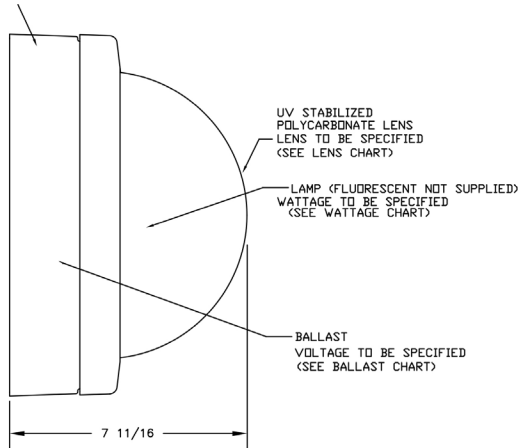


CAST ALUMINUM GUARD
POLYESTER POWDER COATED
COLOR TO BE SPECIFIED
(SEE FINISH CHART)

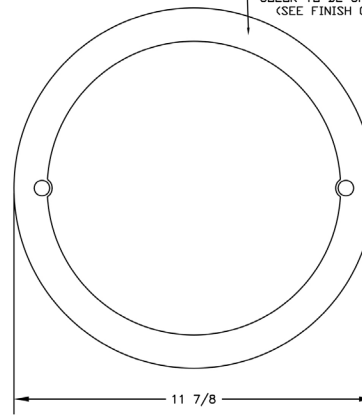

CAST ALUMINUM BODY
POLYESTER POWDER COATED
COLOR TO BE SPECIFIED
(SEE FINISH CHART)

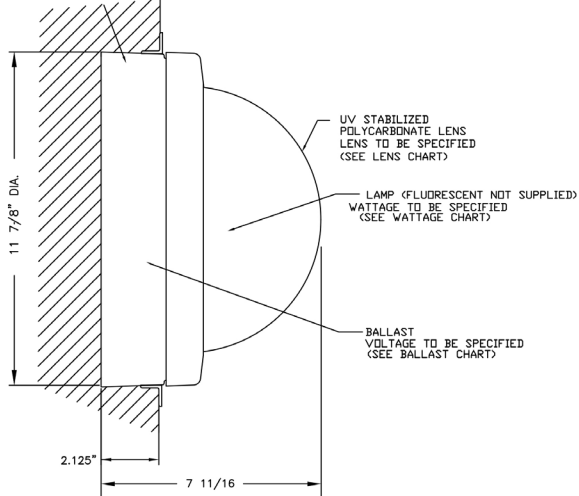

CAST ALUMINUM GUARD
POLYESTER POWDER COATED
COLOR TO BE SPECIFIED
(SEE FINISH CHART)

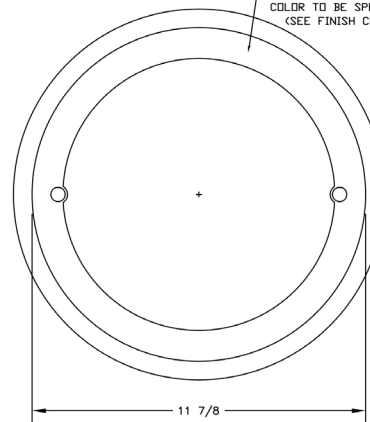

Job Name/Date:

Fixture Type Designation: