

# NEVA 2 SURFACE

## NEVA 2.0, 2.1, 2.2 and MINI 2

The Neva 2 series are linear profiles with deep-set optics perfect for architectural lighting for both indoor and outdoor applications. Available in 4 different lengths with ingrade housing for recessed applications or adjustable brackets for surface mount.

### TECHNICAL DATA

<b>Wattage / Input</b>	See Chart on page 2. (24VDC)
<b>Power Supply</b>	Remote, not included. See page 3.
<b>Construction</b>	Body: Anodized Aluminum Lens: Tempered and Serigraphed Glass Cable Length: 4.92' standard
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	CRI >80
<b>Delivered Lumens</b>	See Chart on page 2.
<b>Efficacy</b>	62-66 lm/W
<b>Optics</b>	11°, 30°, 45°, 10°x40°
<b>Finishes</b>	N/A
<b>Cut-Out Dimensions</b>	See Chart on page 2.
<b>Fixture Dimensions</b>	See Chart on page 2.
<b>Fixture Weight</b>	See Chart on page 2.
<b>LED Source</b>	See Chart on page 2.
<b>Lumen Maintenance</b>	L85, B10>50,000hrs
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP67
<b>Impact Rating</b>	IK06



### ORDERING INFORMATION

Example: NV22005MA or NV22005MA-3. Accessories / Power Supplies ordered separately.

Model No.	CCT	Optics	Finish	Cable Length
NV0200 - Neva Mini 2 (5.5W)	F - 2700K	S - 11°	A - Aluminum	4.92' standard
NV0201 - Neva Mini 2 (7.5W)	5 - 3000K	M - 30°		1 - 16.40'
NV2000 - Neva 2.0 (11W)	9 - 4000K	L - 45°		2 - 32.81'
NV2001 - Neva 2.0 (15W)		W - 10°x40°		3 - 49.21'
NV2100 - Neva 2.1 (16W)				4 - 65.62'
NV2101 - Neva 2.1 (22W)				
NV2200 - Neva 2.2 (27W)				
NV2201 - Neva 2.2 (38W)				

Job Name/Date:


Fixture Type Designation:

# NEVA 2 SURFACE


## NEVA 2.0, 2.1, 2.2 and MINI 2

### TECHNICAL DATA


	NEVA MINI 2		NEVA 2.0		NEVA 2.1		NEVA 2.2	
	5.5W	7.5W	11W	15W	16W	22W	27W	38W
<b>Delivered Lumens (3000K)</b>	345 lm	483 lm	690 lm	966 lm	1035 lm	1450 lm	1725 lm	2415 lm
<b>Fixture Dim. (l,w,h)</b>	12.44" x 1.46" x 2.28"		26.65" x 1.46" x 2.28"		40.83" x 1.46" x 2.28"		69.21" x 1.46" x 2.28"	
<b>Fixture Weight</b>	1.28 lbs		2.76 lbs		4.12 lbs		6.94 lbs	
<b>LED Source</b>	3 power LEDs, LED spacing 4.72"		6 power LEDs, LED spacing 4.72"		9 power LEDs, LED spacing 4.72"		15 power LEDs, LED spacing 4.72"	

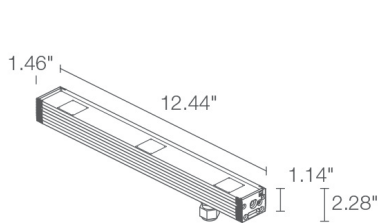


**NEVA MINI 2**

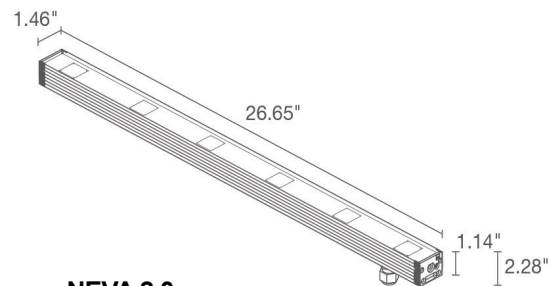

**NEVA 2.0**

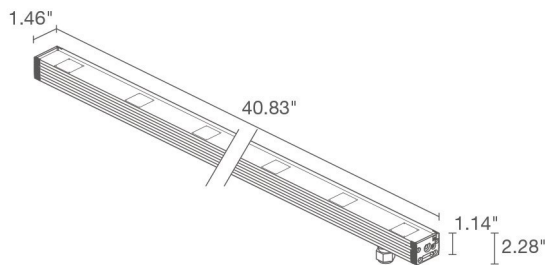

**NEVA 2.1**

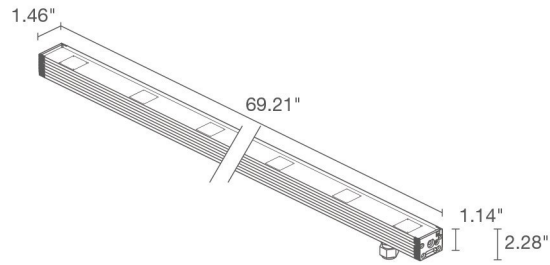

**NEVA 2.2**

Job Name/Date:

Fixture Type Designation:

# NEVA 2 SURFACE

## NEVA 2.0, 2.1, 2.2 and MINI 2

### SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures / Power Supply								
			Neva Mini 2		Neva 2.0		Neva 2.1		Neva 2.2		
			5.5W	7.5W	11W	15W	16W	22W	27W	38W	
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1	1-1	-	-	-	-	-	-	-
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-5	1-4	1-2	1-2	1-2	1-1	1-1	-	-
<a href="#">PPLT00709</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-13	1-10	1-6	1-5	1-4	1-3	1-2	1-2	-
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W	2-14	2-10	1-7	1-5	1-5	1-3	1-2	1-2	-

### Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures / Power Supply							
						Neva Mini 2		Neva 2.0		Neva 2.1		Neva 2.2	
						5.5W	7.5W	11W	15W	16W	22W	27W	38W
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-5	1-4	1-2	1-2	1-2	1-1	1-1	-
<a href="#">PPLT00530</a>	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-13	1-10	1-6	1-5	1-4	1-3	1-2	1-2

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:


# NEVA 2 SURFACE

## NEVA 2.0, 2.1, 2.2 and MINI 2

### ACCESSORIES - Installation

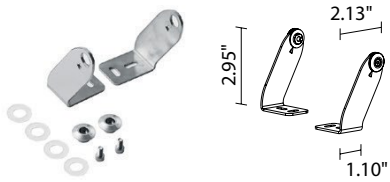


**WM0601**  
Pair of brackets 2.95" h

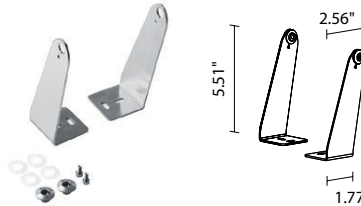


**WM0602**  
Pair of brackets 5.51" h

### Anti-Glare



- Honeycomb Louver**  
**WH6002** - Neva Mini 2  
**WH6020** - Neva 2.0  
**WH6021** - Neva 2.1  
**WH6022** - Neva 2.2



- Anti-Glare Shield**  
Stainless steel painted black  
**WB6500** - Neva Mini 2 (12.91")  
**WB6520** - Neva 2.0 (26.50")  
**WB6521** - Neva 2.1 (40.67")  
**WB6522** - Neva 2.2 (69.06")

Job Name/Date:

Fixture Type Designation:

# NEVA 2 SURFACE


## NEVA 2.0, 2.1, 2.2 and MINI 2

### PHOTOMETRIC DATA


Note all Photometry is CRI 80, 3000K

#### NEVA MINI 2


##### S - 11°

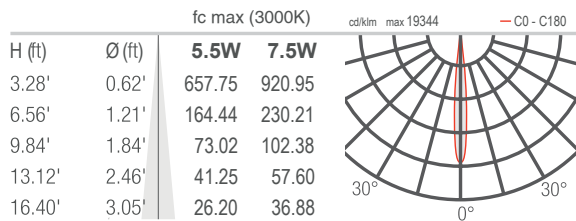


##### M - 30°

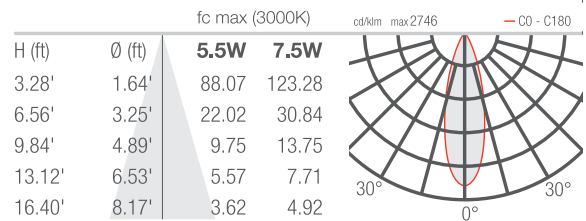

##### L - 45°

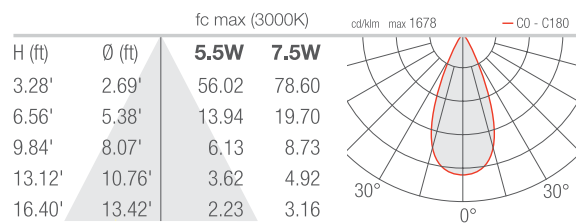


##### W - 12°x40°

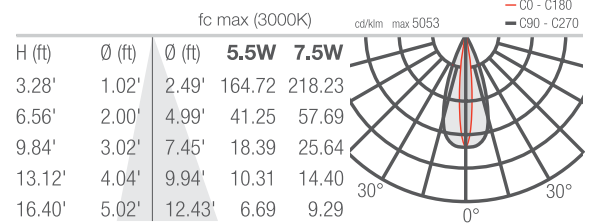


#### NEVA 2.0


##### S - 11°

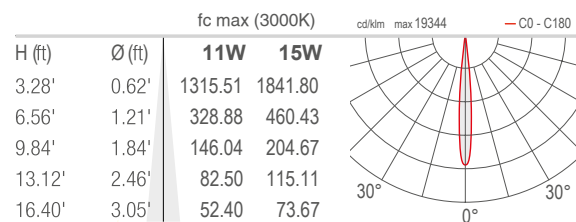


##### M - 30°

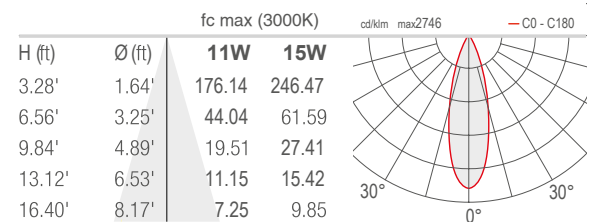

##### L - 45°

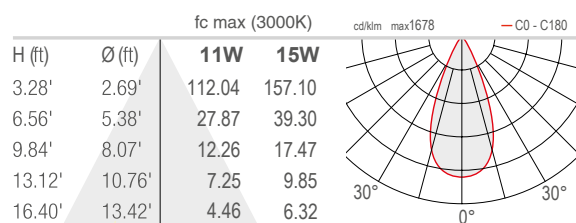

##### W - 12°x40°

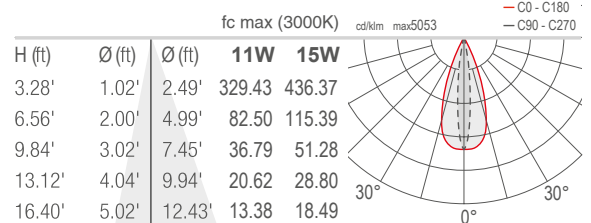

Job Name/Date:

Fixture Type Designation: