

NEVA 4 SURFACE

NEVA 4.0, 4.1, 4.2

The Neva 4 series are linear profiles with deep-set optics and a built-in power supply which has an in-out connection system so that the fixtures can be installed in a line. Available in 3 different lengths with in-grade housing for recessed applications or adjustable brackets for surface mount. Neva are perfect for architectural lighting in both indoor and outdoor applications.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | See Chart on page 2 (120VAC) |
| Power Supply | Integral - On/Off or 0-10V |
| Construction | Body: Black Anodized Aluminum Lens: Serigraphed, Tempered, Transparent, Extra-clear Glass |
| CCT | 2700K, 3000K, 4000K |
| CRI | >80 |
| Delivered Lumens | See Chart on page 2. |
| Efficacy | 61.5-70 lm/W |
| Optics | 11°, 30°, 45°, 10°x40° |
| Finishes | Black Anodized Aluminum |
| Cut-Out Dimensions | See Chart on page 2. |
| Fixture Dimensions | See Chart on page 2. |
| Fixture Weight | See Chart on page 2. |
| LED Source | See Chart on page 2. |
| Lumen Maintenance | L85, B10>50,000hrs (Ta 25°C) |
| Color Consistency | 3-Step MacAdam |
| Operating Temp. | -4°F to +113°F |
| IP Rating | IP65, IP67 |
| Impact Rating | IK08 |

ORDERING INFORMATION

Example: NV40100V01F0SN. Accessories ordered separately.

| | | | | | N |
|-------------------------|----------------|----------------------|------------|-------------|-----------|
| Model No. | Control System | Optical Accessory | CCT | Optics | Finish |
| NV4010 - Neva 4.0 (16W) | 000 - ON/OFF | 0 - None | F0 - 2700K | S - 11° | N - Black |
| NV4110 - Neva 4.1 (24W) | 0V0 - 0-10V | 1 - Honeycomb Louvre | 50 - 3000K | M - 30° | Anodized |
| NV4210 - Neva 4.2 (40W) | | | 90 - 4000K | L - 45° | |
| | | | | W - 10°x40° | |

Job Name/Date:




Fixture Type Designation:

NEVA 4 SURFACE

NEVA 4.0, 4.1, 4.2

TECHNICAL DATA

| | NEVA 4.0 | NEVA 4.1 | NEVA 4.2 |
|---------------------------------|------------------------------------|------------------------------------|-------------------------------------|
| Wattage | 16W | 24W | 40W |
| Delivered Lumens (3000K) | 966 lm (3000K, 30°) | 1450 lm (3000K, 30°) | 2415 lm (3000K, 30°) |
| Fixture Dim. (l,w,h) | 26.65" x 1.46" x 2.91" | 40.83" x 1.46" x 2.91" | 69.21" x 1.46" x 2.91" |
| Fixture Weight | 3.53 lbs | 4.63 lbs | 7.98 lbs |
| LED Source | 6 power LEDs, LED spacing 4.72" | 9 power LEDs, LED spacing 4.72" | 15 power LEDs, LED spacing 4.72" |

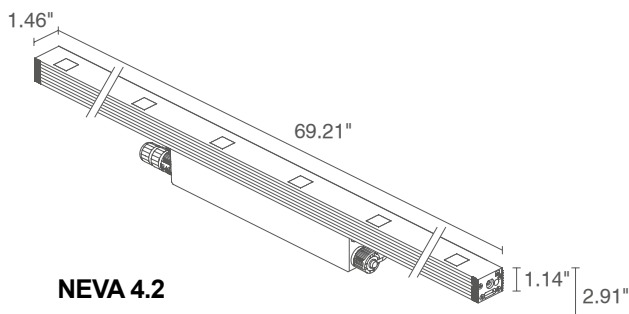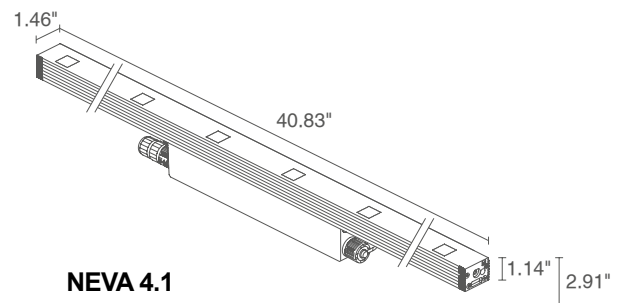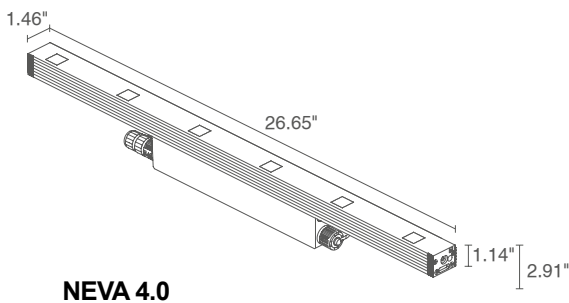


Job Name/Date:

Fixture Type Designation:

NEVA 4 SURFACE

NEVA 4.0, 4.1, 4.2

ACCESSORIES - Installation



WMA01N


Pair of brackets 2.95" h



WMA02N

Pair of brackets 5.51" h

Anti-Glare



Anti-Glare Shield

Stainless steel painted black

WB6520 - Neva 4.0 (26.50")

WB6521 - Neva 4.1 (40.67")

WB6522 - Neva 4.2 (69.06")

Job Name/Date:

Fixture Type Designation:


NEVA 4 SURFACE

NEVA 4.0, 4.1, 4.2


PHOTOMETRIC DATA

Note all Photometry is CRI 80, 3000K


S - 11°

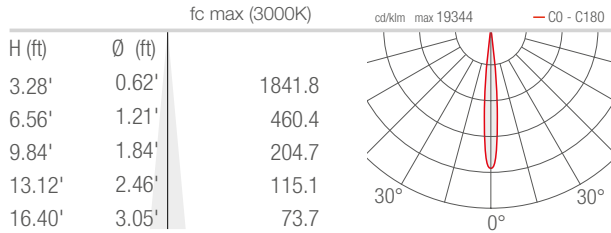


M - 30°

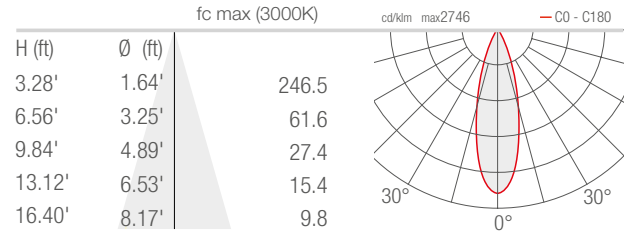

L - 45°

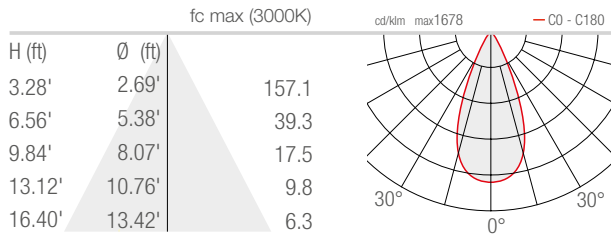

W - 10°x40°

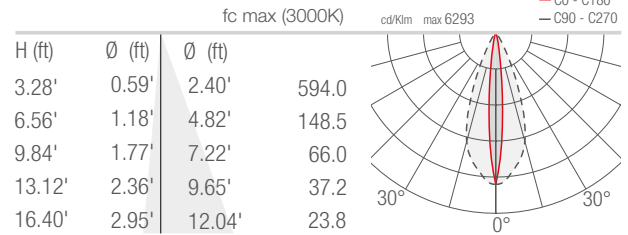

Job Name/Date:

Fixture Type Designation: