

# NEVA 5 RECESSED

## NEVA 5.0, 5.1, 5.2 and MINI 5

The Neva 5 series are RGB linear profiles with deep-set optics perfect for architectural lighting for both indoor and outdoor applications. Available in 4 different lengths and with in-grade housing for recessed applications or adjustable brackets for surface mount.



NTC



### TECHNICAL DATA

<b>Wattage / Input</b>	See Chart on page 2. (24VDC)
<b>Power Supply</b>	Remote, not included. See page 3.
<b>Construction</b>	Body: Anodized Aluminum Lens: Tempered and Serigraphed Glass Cable Length: 4.92' standard
<b>CCT</b>	RGB
<b>CRI</b>	CRI >80
<b>Delivered Lumens</b>	See Chart on page 2.
<b>Efficacy</b>	42.6 lm/W, Mini 5: 32.4 lm/W
<b>Optics</b>	15°, 26°, 30°, 24°x46°
<b>Finishes</b>	N/A
<b>Cut-Out Dimensions</b>	See Chart on page 2.
<b>Fixture Dimensions</b>	See Chart on page 2.
<b>Fixture Weight</b>	See Chart on page 2.
<b>LED Source</b>	See Chart on page 2.
<b>Lumen Maintenance</b>	L90, B10>50,000hrs
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP67
<b>Impact Rating</b>	IK06

### ORDERING INFORMATION

Example: NV05006MA or NV05006MA-3. Accessories / Power Supplies ordered separately.

	6		A	
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>	<b>Cable Length</b>
NV0500 - Neva Mini 5	6 - RGB	S - 15°	A - Aluminum	4.92' standard
NV5000 - Neva 5.0		M - 26°		1 - 16.40'
NV5100 - Neva 5.1		L - 30°		2 - 32.81'
NV5200 - Neva 5.2		W - 24°x46°		3 - 49.21'
				4 - 65.62'

Job Name/Date:


Fixture Type Designation:

# NEVA 5 RECESSED


## NEVA 5.0, 5.1, 5.2 and MINI 5

### TECHNICAL DATA


	NEVA MINI 5	NEVA 5.0	NEVA 5.1	NEVA 5.2
<b>Wattage</b>	10W	20W	30W	50W
<b>Delivered Lumens (3000K)</b>	324 lm: (R) 54 lm, (G) 162 lm, (B) 108 lm (26°)	852 lm: (R) 312 lm, (G) 402 lm, (B) 138 lm (26°)	1278 lm: (R) 468 lm, (G) 603 lm, (B) 207 lm (26°)	2130 lm: (R) 780 lm, (G) 1005 lm, (B) 345 lm (26°)
<b>Fixture Dim. (l,w,h)</b>	12.44" x 1.46" x 2.28"	26.65" x 1.46" x 2.28"	40.83" x 1.46" x 2.28"	69.21" x 1.46" x 2.28"
<b>Alum. Housing Dim. (l,w,h) &amp; Cut-Out Size (l,w)</b>	12.68" x 1.65" x 3.31"	26.85" x 1.65" x 3.31"	41.02" x 1.65" x 3.31"	69.41" x 1.65" x 3.31"
	same as housing	same as housing	same as housing	same as housing
<b>Alum Housing Dim. (l,w,h) (for plasterboard) &amp; Cut-Out Size (l,w)</b>	12.68" x 1.65" x 3.31"	26.85" x 1.65" x 3.31"	41.02" x 1.65" x 3.31"	69.41" x 1.65" x 3.31"
	same as housing	same as housing	same as housing	same as housing
<b>Fixture Weight</b>	1.28 lbs	2.76 lbs	4.12 lbs	6.94 lbs
<b>LED Source</b>	3 RGB LED groups, LED spacing 4.72"	6 RGB LED groups, LED spacing 4.72"	9 RGB LED groups, LED spacing 4.72"	15 RGB LED groups, LED spacing 4.72"

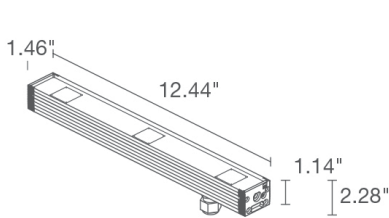


**NEVA MINI 5**

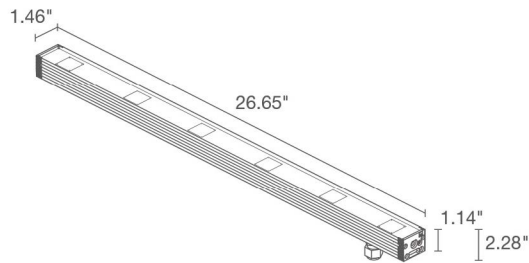

**NEVA 5.0**

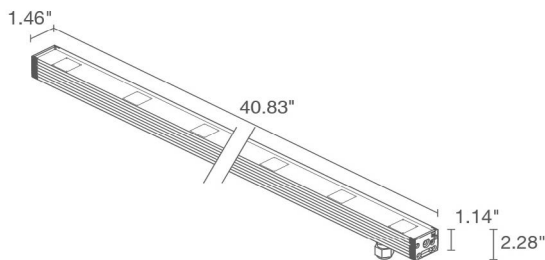

**NEVA 5.1**

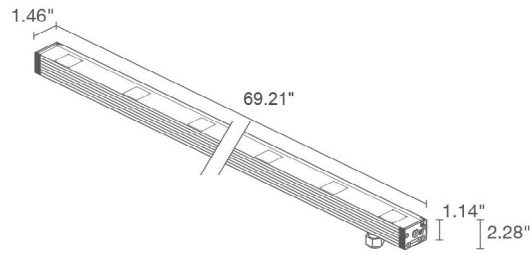

**NEVA 5.2**

Job Name/Date:

Fixture Type Designation:

# NEVA 5 RECESSED





## NEVA 5.0, 5.1, 5.2 and MINI 5

### SUGGESTED POWER SUPPLIES 24VDC


Part Number	Description	Input/Output	# of Fixtures / Power Supply			
			Neva Mini 5	Neva 5.0	Neva 5.1	Neva 5.2
			10W	20W	30W	50W
<a href="#">PPLT00288</a>	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W	1-8	1-4	1-2	1-1

For other power supply options consult factory.



### ACCESSORIES - Installation

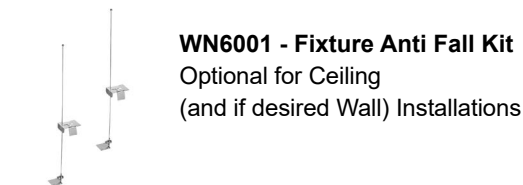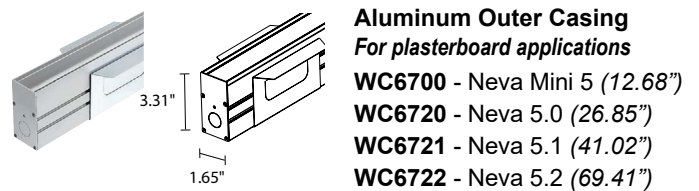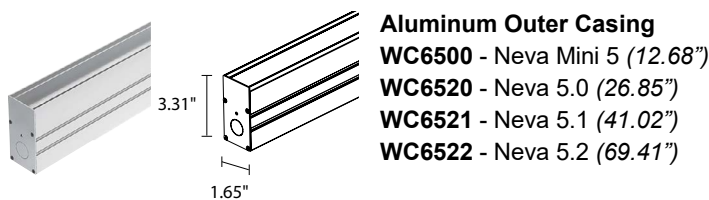

### Anti-Glare

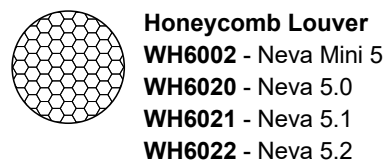

### Spare Parts

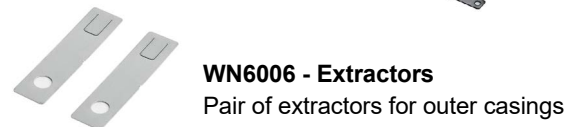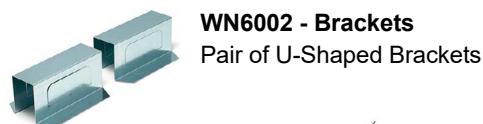

Job Name/Date:

Fixture Type Designation:

# NEVA 5 RECESSED


## NEVA 5.0, 5.1, 5.2 and MINI 5

### PHOTOMETRIC DATA

Note all Photometry is White Light created by color mixing


#### NEVA MINI 5

**S** - 15°

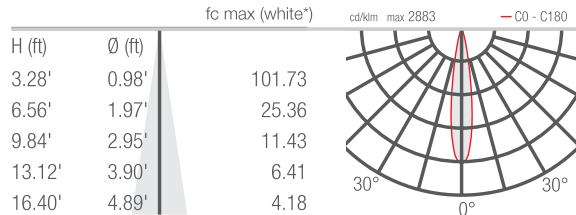


\*White created by mixing the colours


**M** - 26°

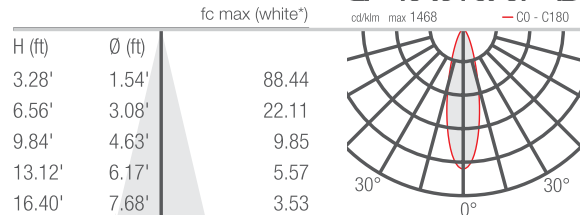

**L** - 30°

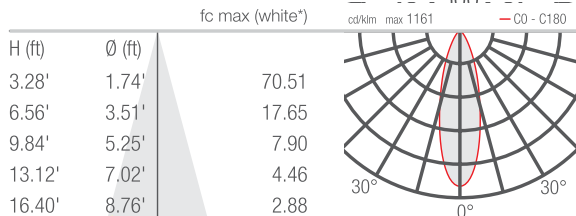


**W** - 24°x46°

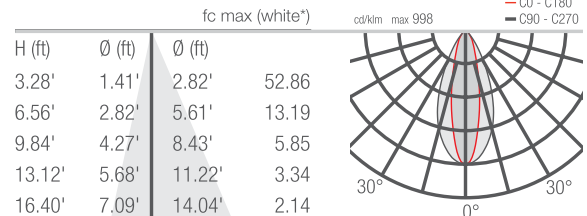


#### NEVA 5.0

**S** - 18°

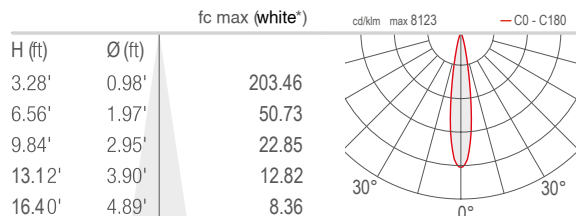


\*White created by mixing the colours


**M** - 26°

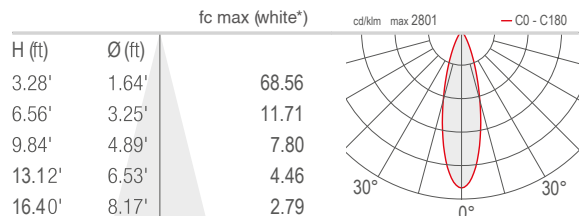

**L** - 32°

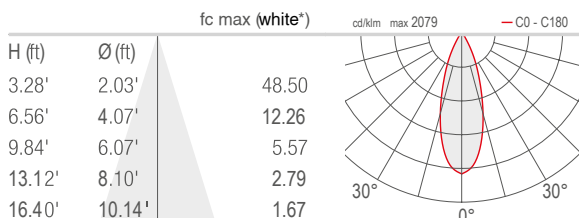

**W** - 22°x42°

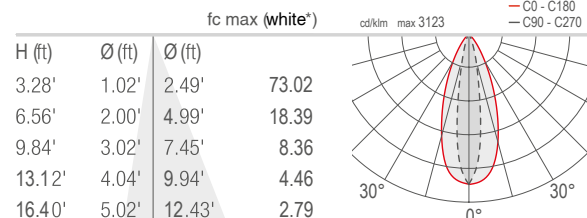

Job Name/Date:

Fixture Type Designation: