

# NEVA 6 RECESSED

## NEVA 6.0, 6.1, 6.2 and MINI 6

The Neva 6 series are Dynamic White linear profiles with deep-set optics perfect for architectural lighting for both indoor and outdoor applications. Available in 4 different lengths and with in-grade housing for recessed applications or adjustable brackets for surface mount.



### TECHNICAL DATA

<b>Wattage / Input</b>	See Chart on page 2. (24VDC)
<b>Power Supply</b>	Remote, not included. See page 3.
<b>Construction</b>	Body: Anodized Aluminum Lens: Tempered and Serigraphed Glass Cable Length: 4.92' standard
<b>CCT</b>	Dynamic White: Amber, 4000K, 5000K
<b>CRI</b>	CRI >80
<b>Delivered Lumens</b>	See Chart on page 2.
<b>Efficacy</b>	73.7 lm/W
<b>Optics</b>	15°, 26°, 30°, 24°x46°
<b>Finishes</b>	N/A
<b>Cut-Out Dimensions</b>	See Chart on page 2.
<b>Fixture Dimensions</b>	See Chart on page 2.
<b>Fixture Weight</b>	See Chart on page 2.
<b>LED Source</b>	See Chart on page 2.
<b>Lumen Maintenance</b>	L85, B10>50,000hrs
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP67
<b>Impact Rating</b>	IK06

### ORDERING INFORMATION

Example: NV6100HLA or NV6100HLA-2. Accessories / Power Supplies ordered separately.

Model No.	CCT	Optics	Finish	Cable Length
NV0600 - Neva Mini 6	H - Dynamic White	S - 15° M - 26° L - 30° W - 24°x46°	A - Aluminum	4.92' standard
NV6000 - Neva 6.0				1 - 16.40'
NV6100 - Neva 6.1				2 - 32.81'
NV6200 - Neva 6.2				3 - 49.21'
				4 - 65.62'

Job Name/Date:


Fixture Type Designation:

# NEVA 6 RECESSED


## NEVA 6.0, 6.1, 6.2 and MINI 6

### TECHNICAL DATA


	NEVA MINI 6	NEVA 6.0	NEVA 6.1	NEVA 6.2
<b>Wattage</b>	10W	20W	30W	50W
<b>Delivered Lumens</b>	737 lm (26°): amber 184 lm, 4000K 270 lm, 5000K 283 lm	1475 lm (26°): amber 368 lm, 4000K 540 lm, 5000K 567 lm	2212 lm (26°): amber 552 lm, 4000K 810 lm, 5000K 850 lm	3687 lm (26°): amber 920 lm, 4000K 1350 lm, 5000K 1417 lm
<b>Fixture Dim. (l,w,h)</b>	12.44" x 1.46" x 2.28"	26.65" x 1.46" x 2.28"	40.83" x 1.46" x 2.28"	69.21" x 1.46" x 2.28"
<b>Alum. Housing Dim. (l,w,h) &amp; Cut-Out Size (l,w)</b>	12.68" x 1.65" x 3.31"	26.85" x 1.65" x 3.31"	41.02" x 1.65" x 3.31"	69.41" x 1.65" x 3.31"
	same as housing	same as housing	same as housing	same as housing
<b>Alum Housing Dim. (l,w,h) (for plasterboard) &amp; Cut-Out Size (l,w)</b>	12.68" x 1.65" x 3.31"	26.85" x 1.65" x 3.31"	41.02" x 1.65" x 3.31"	69.41" x 1.65" x 3.31"
	same as housing	same as housing	same as housing	same as housing
<b>Fixture Weight</b>	1.28 lbs	2.76 lbs	4.12 lbs	6.94 lbs
<b>LED Source</b>	3 DW LED groups, LED spacing 4.72"	6 DW LED groups, LED spacing 4.72"	9 DW LED groups, LED spacing 4.72"	15 DW LED groups, LED spacing 4.72"

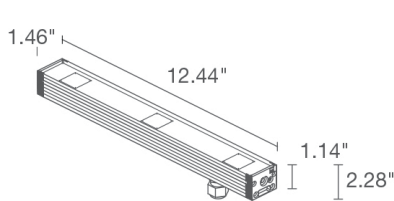


**NEVA MINI 6**

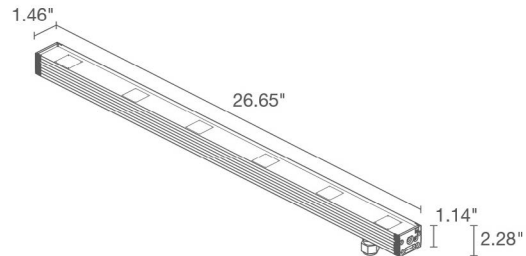

**NEVA 6.0**

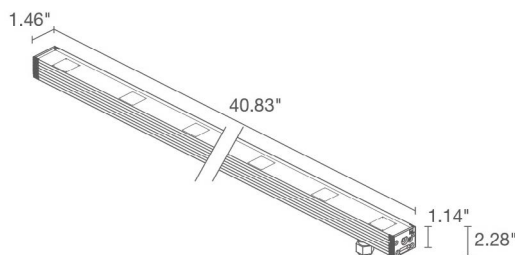

**NEVA 6.1**

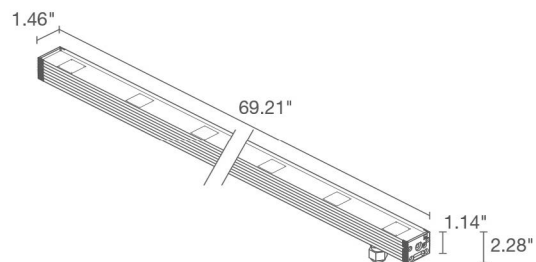

**NEVA 6.2**

Job Name/Date:

Fixture Type Designation:

# NEVA 6 RECESSED

## NEVA 6.0, 6.1, 6.2 and MINI 6





### SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures / Power Supply			
			Neva Mini 6	Neva 6.0	Neva 6.1	Neva 6.2
			10W	20W	30W	50W
<a href="#">PPLT00288</a>	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W	1-8	1-4	1-2	1-1

For other power supply options consult factory.



### ACCESSORIES - Installation

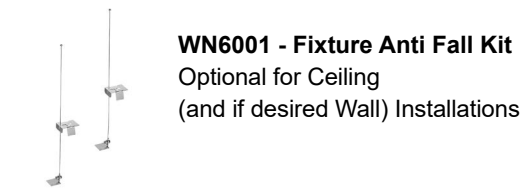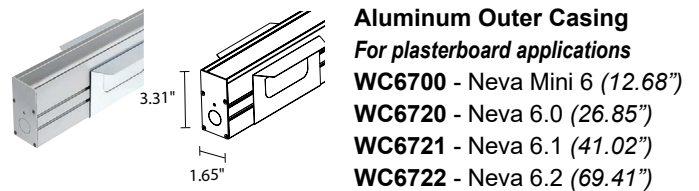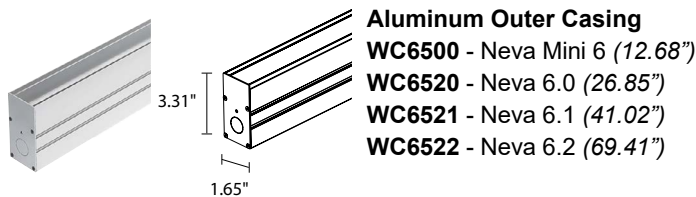

### Anti-Glare

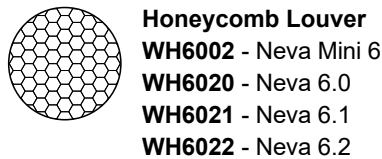

### Spare Parts

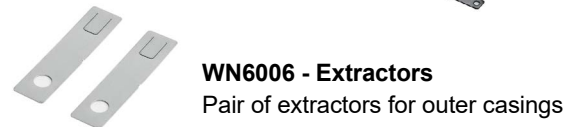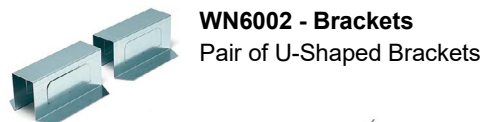

Job Name/Date:

Fixture Type Designation:

# NEVA 6 RECESSED


## NEVA 6.0, 6.1, 6.2 and MINI 6

### PHOTOMETRIC DATA


Note all Photometry is CRI 80, 3000K

### NEVA MINI 6


#### S - 15°

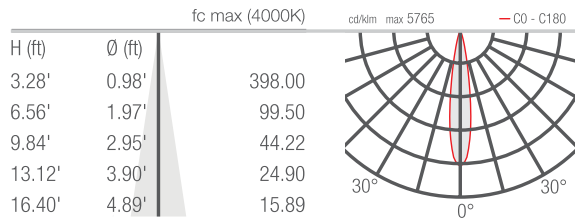


#### M - 26°

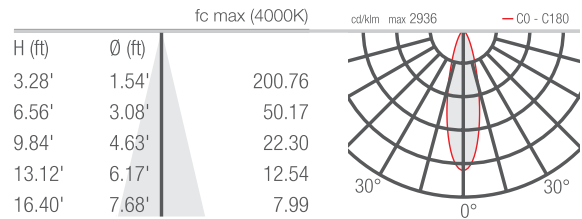

#### L - 30°

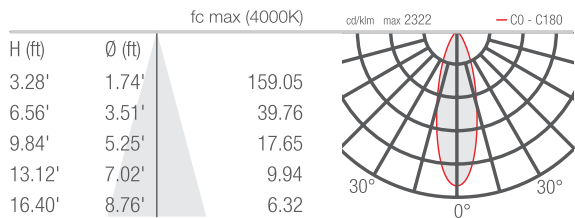


#### W - 24°x46°

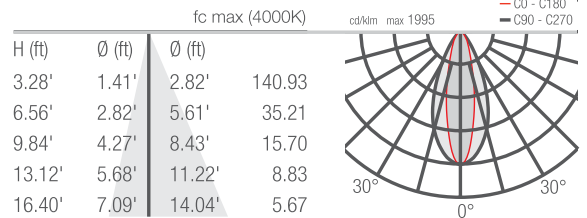


### NEVA 6.0


#### S - 15°

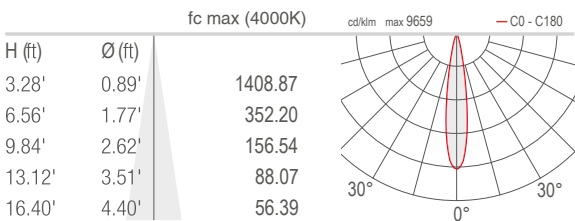


#### M - 25°

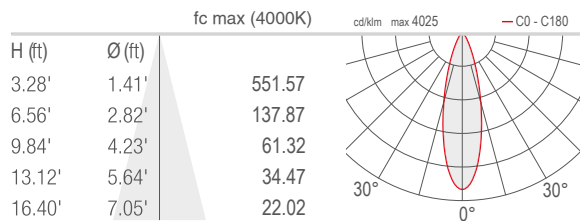

#### L - 30°

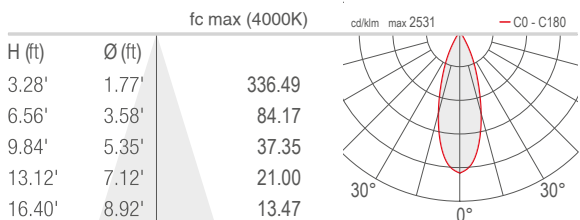

#### W - 18°x43°

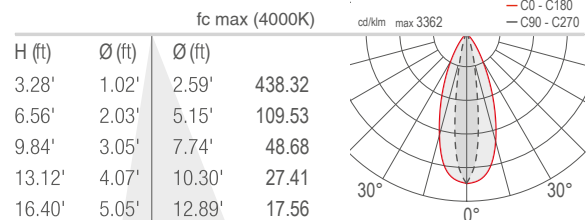

Job Name/Date:

Fixture Type Designation: