

NEVA 6 RECESSED

NEVA 6.0, 6.1, 6.2 and MINI 6

The Neva 6 series are Dynamic White linear profiles with deep-set optics perfect for architectural lighting for both indoor and outdoor applications. Available in 4 different lengths and with in-grade housing for recessed applications or adjustable brackets for surface mount.

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (24VDC)
Power Supply	Remote, not included. See page 3.
Construction	Body: Anodized Aluminum Lens: Tempered and Serigraphed Glass Cable Length: 4.92' standard
CCT	Dynamic White: Amber, 4000K, 5000K
CRI	CRI >80
Delivered Lumens	See Chart on page 2.
Efficacy	73.7 lm/W
Optics	15°, 26°, 30°, 24°x46°
Finishes	N/A
Cut-Out Dimensions	See Chart on page 2.
Fixture Dimensions	See Chart on page 2.
Fixture Weight	See Chart on page 2.
LED Source	See Chart on page 2.
Lumen Maintenance	L85, B10>50,000hrs
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP67
Impact Rating	IK06



ORDERING INFORMATION

Example: NV6100HLA or NV6100HLA-2. Accessories / Power Supplies ordered separately.

	H		A	
Model No.	CCT	Optics	Finish	Cable Length
NV0600 - Neva Mini 6	H - Dynamic White	S - 15°	A - Aluminum	4.92' standard
NV6000 - Neva 6.0		M - 26°		1 - 16.40'
NV6100 - Neva 6.1		L - 30°		2 - 32.81'
NV6200 - Neva 6.2		W - 24°x46°		4 - 65.62'

Job Name/Date:


Fixture Type Designation:

NEVA 6 RECESSED


NEVA 6.0, 6.1, 6.2 and MINI 6

TECHNICAL DATA


	NEVA MINI 6	NEVA 6.0	NEVA 6.1	NEVA 6.2
Wattage	10W	20W	30W	50W
Delivered Lumens	737 lm (26°): amber 184 lm, 4000K 270 lm, 5000K 283 lm	1475 lm (26°): amber 368 lm, 4000K 540 lm, 5000K 567 lm	2212 lm (26°): amber 552 lm, 4000K 810 lm, 5000K 850 lm	3687 lm (26°): amber 920 lm, 4000K 1350 lm, 5000K 1417 lm
Fixture Dim. (l,w,h)	12.44" x 1.46" x 2.28"	26.65" x 1.46" x 2.28"	40.83" x 1.46" x 2.28"	69.21" x 1.46" x 2.28"
Alum. Housing Dim. (l,w,h) & Cut-Out Size (l,w)	12.68" x 1.65" x 3.31"	26.85" x 1.65" x 3.31"	41.02" x 1.65" x 3.31"	69.41" x 1.65" x 3.31"
	same as housing	same as housing	same as housing	same as housing
Alum Housing Dim. (l,w,h) (for plasterboard) & Cut-Out Size (l,w)	12.68" x 1.65" x 3.31"	26.85" x 1.65" x 3.31"	41.02" x 1.65" x 3.31"	69.41" x 1.65" x 3.31"
	same as housing	same as housing	same as housing	same as housing
Fixture Weight	1.28 lbs	2.76 lbs	4.12 lbs	6.94 lbs
LED Source	3 DW LED groups, LED spacing 4.72"	6 DW LED groups, LED spacing 4.72"	9 DW LED groups, LED spacing 4.72"	15 DW LED groups, LED spacing 4.72"

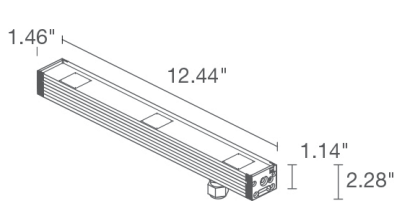


NEVA MINI 6

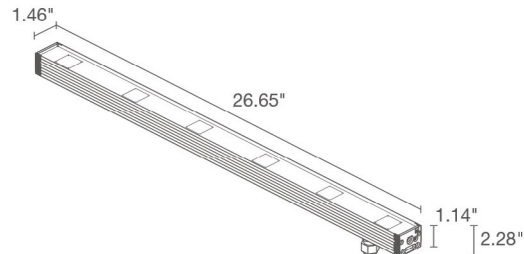

NEVA 6.0

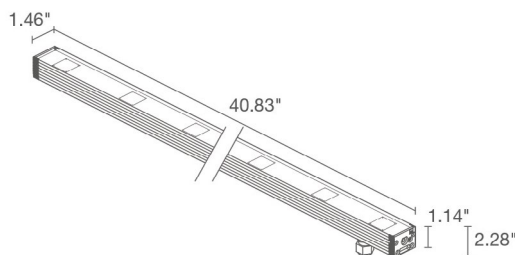

NEVA 6.1

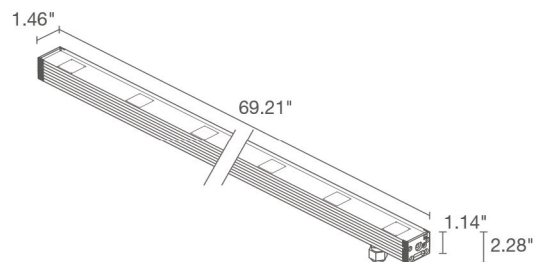

NEVA 6.2

Job Name/Date:

Fixture Type Designation:

NEVA 6 RECESSED

NEVA 6.0, 6.1, 6.2 and MINI 6


SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures / Power Supply			
			Neva Mini 6	Neva 6.0	Neva 6.1	Neva 6.2
			10W	20W	30W	50W
PPLT00288	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W	1-8	1-4	1-2	1-1

For other power supply options consult factory.

ACCESSORIES - Installation

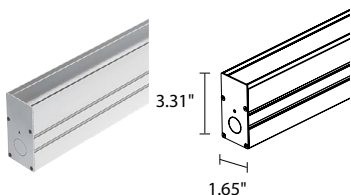

Aluminum Outer Casing
WC6500 - Neva Mini 6 (12.68")
WC6520 - Neva 6.0 (26.85")
WC6521 - Neva 6.1 (41.02")
WC6522 - Neva 6.2 (69.41")



Aluminum Outer Casing
For plasterboard applications
WC6700 - Neva Mini 6 (12.68")
WC6720 - Neva 6.0 (26.85")
WC6721 - Neva 6.1 (41.02")
WC6722 - Neva 6.2 (69.41")




WN6005 - Alignment Kit
For Aluminum Outer Casings



WN6001 - Fixture Anti Fall Kit
Optional for Ceiling
(and if desired Wall) Installations

Anti-Glare




Honeycomb Louver
WH6002 - Neva Mini 6
WH6020 - Neva 6.0
WH6021 - Neva 6.1
WH6022 - Neva 6.2



Anti-Glare Shield
Stainless steel painted black
WB6500 - Neva Mini 6 (12.91")
WB6520 - Neva 6.0 (26.50")
WB6521 - Neva 6.1 (40.67")
WB6522 - Neva 6.2 (69.06")

Spare Parts



WN6002 - Brackets
Pair of U-Shaped Brackets



WN6003 - Springs
Pair of Spring



WN6006 - Extractors
Pair of extractors for outer casings

Job Name/Date:

Fixture Type Designation:

NEVA 6 RECESSED


NEVA 6.0, 6.1, 6.2 and MINI 6

PHOTOMETRIC DATA


Note all Photometry is CRI 80, 3000K

NEVA MINI 6


S - 15°

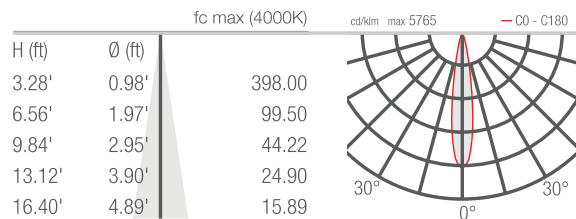


M - 26°

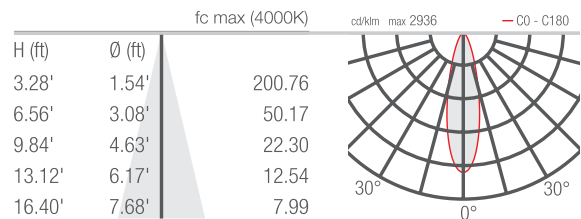

L - 30°

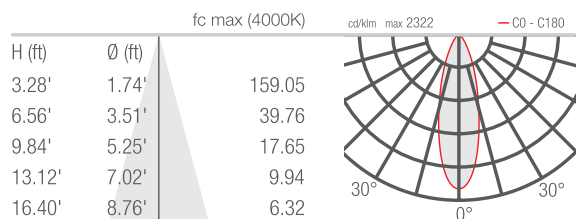


W - 24°x46°

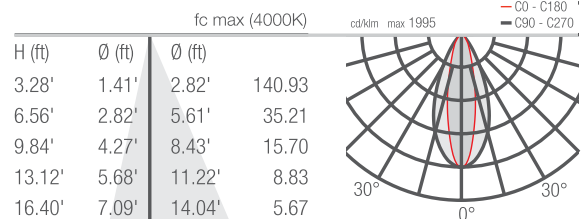


NEVA 6.0


S - 15°

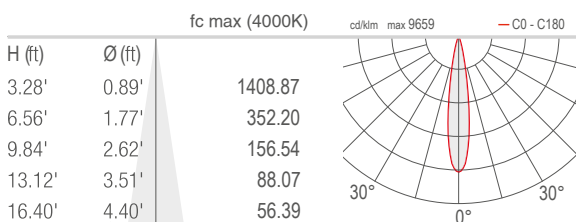


M - 25°

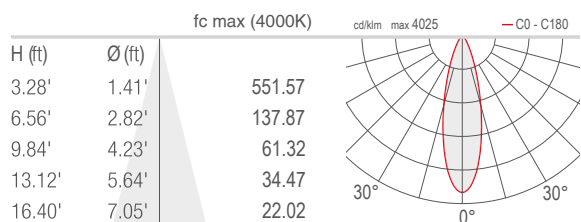

L - 30°

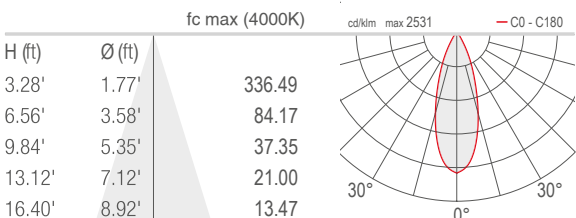

W - 18°x43°

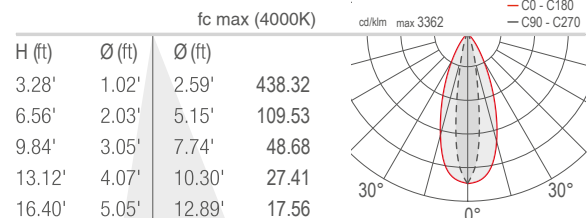

Job Name/Date:

Fixture Type Designation: