

# NEVA 7 SURFACE

## NEVA 7.0, 7.1, 7.2 and MINI 7

The Neva 7 series are RGBW linear profiles with deep-set optics perfect for architectural lighting for both indoor and outdoor applications. Available in 4 different lengths and with in-grade housing for recessed applications or adjustable brackets for surface mount.



### TECHNICAL DATA

<b>Wattage / Input</b>	See Chart on page 2. (24VDC)
<b>Power Supply</b>	Remote, not included. See page 3.
<b>Construction</b>	Body: Anodized Aluminum Lens: Tempered and Serigraphed Glass Cable Length: 4.92' standard
<b>CCT</b>	RGBW (4000K)
<b>CRI</b>	CRI >80
<b>Delivered Lumens</b>	See Chart on page 2.
<b>Efficacy</b>	35 lm/W
<b>Optics</b>	18°, 32°, 44°, 78°, 26°x58°
<b>Finish</b>	Aluminum
<b>Cut-Out Dimensions</b>	See Chart on page 2.
<b>Fixture Dimensions</b>	See Chart on page 2.
<b>Fixture Weight</b>	See Chart on page 2.
<b>LED Source</b>	See Chart on page 2.
<b>Lumen Maintenance</b>	L90, B10>50,000hrs
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP67
<b>Impact Rating</b>	IK06

### ORDERING INFORMATION

*Example: NV70007MA or NV70007MA-3. Accessories / Power Supplies ordered separately.*

	7		A	
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>	<b>Cable Length</b>
NV0700 - Neva Mini 7	7 - RGBW	S - 18°	A - Aluminum	4.92' standard
NV7000 - Neva 7.0		M - 32°		1 - 16.40'
NV7100 - Neva 7.1		L - 44°		2 - 32.81'
NV7200 - Neva 7.2		K - 78°		3 - 49.21'
		W - 26°x58°		4 - 65.62'

Job Name/Date:


Fixture Type Designation:

# NEVA 7 SURFACE


## NEVA 7.0, 7.1, 7.2 and MINI 7

### TECHNICAL DATA


	NEVA MINI 7	NEVA 7.0	NEVA 7.1	NEVA 7.2
<b>Wattage</b>	15W	30W	45W	75W
<b>Delivered Lumens</b>	525 lm: (R) 84 lm, (G) 186 lm, (B) 57 lm, (W) 198 lm (4000K, 32°)	1051 lm: (R) 169 lm, (G) 371 lm, (B) 114 lm, (W) 397 lm (4000K, 32°)	1575 lm: (R) 253 lm, (G) 556 lm, (B) 171 lm, (W) 595 lm (4000K, 32°)	2625 lm: (R) 422 lm, (G) 927 lm, (B) 284 lm, (W) 992 lm (4000K, 32°)
<b>Fixture Dim. (l,w,h)</b>	12.44" x 1.46" x 2.28"	26.65" x 1.46" x 2.28"	40.83" x 1.46" x 2.28"	69.21" x 1.46" x 2.28"
<b>Fixture Weight</b>	1.43 lbs	2.76 lbs	4.19 lbs	7.05 lbs
<b>LED Source</b>	3 RGBW LED groups, LED spacing 4.72"	6 RGBW LED groups, LED spacing 4.72"	9 RGBW LED groups, LED spacing 4.72"	15 RGBW LED groups, LED spacing 4.72"

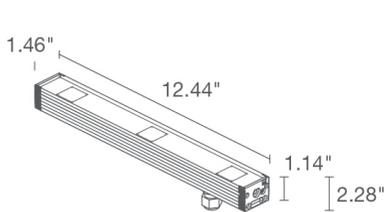


**NEVA MINI 7**

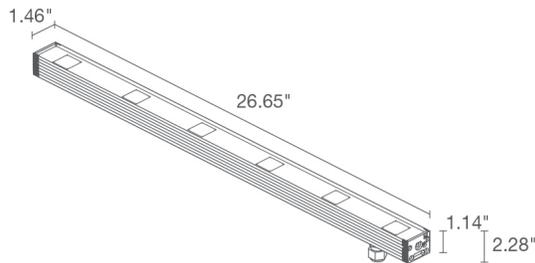

**NEVA 7.0**

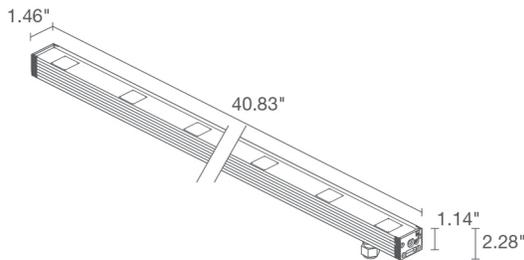

**NEVA 7.1**

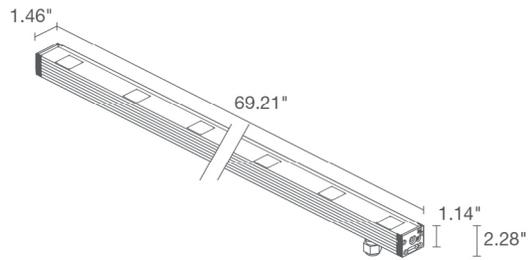

**NEVA 7.2**

Job Name/Date:

Fixture Type Designation:

# NEVA 7 SURFACE

## NEVA 7.0, 7.1, 7.2 and MINI 7


### SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures / Power Supply			
			Neva Mini 7	Neva 7.0	Neva 7.1	Neva 7.2
			15W	30W	45W	75W
<a href="#">PPLT00288</a>	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W	1-5	1-2	1-1	1-1

For other power supply options consult factory.

### ACCESSORIES - Installation



#### WM0601

Pair of brackets 2.95" h



#### WM0602

Pair of brackets 5.51" h

### Anti-Glare



#### Stainless Steel Painted Black Anti-Glare Shield

**WB6500** - Neva Mini 7 (12.91")

**WB6520** - Neva 7.0 (26.50")

**WB6521** - Neva 7.1 (40.67")

**WC6522** - Neva 7.2 (69.06")

### ACCESSORIES

Controllers (RGBW)



#### [PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation:

# NEVA 7 SURFACE


## NEVA 7.0, 7.1, 7.2 and MINI 7

### PHOTOMETRIC DATA


Note all Photometry is CRI 80, 3000K

#### NEVA MINI 7


##### S - 18°

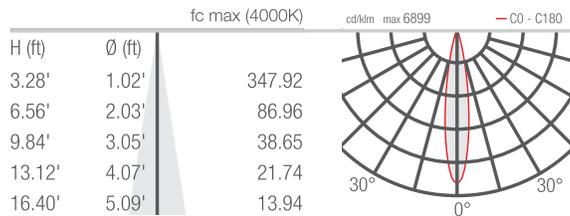


##### M - 32°

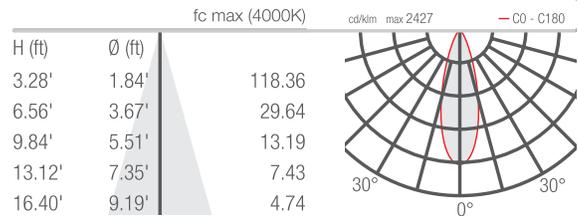


##### L - 44°

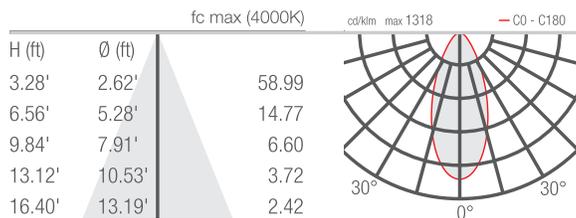

##### W - 26°x58°

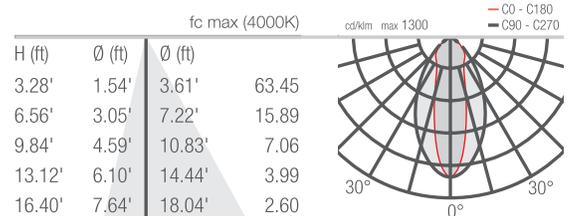

##### K - 78°

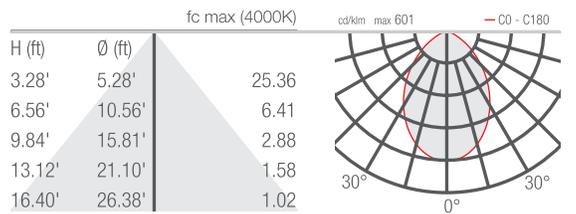

Job Name/Date:

Fixture Type Designation:

# NEVA 7 SURFACE


## NEVA 7.0, 7.1, 7.2 and MINI 7

### PHOTOMETRIC DATA


Note all Photometry is CRI 80, 3000K

### NEVA 7.0, 7.1, 7.2


#### S - 18°

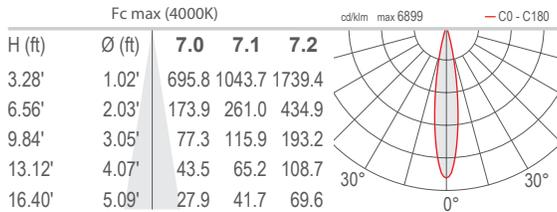


#### M - 32°

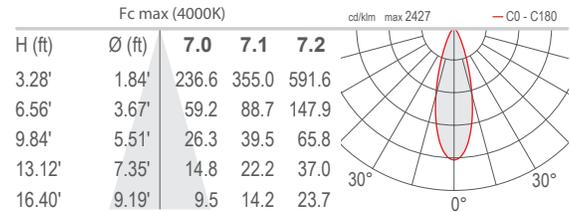


#### L - 44°

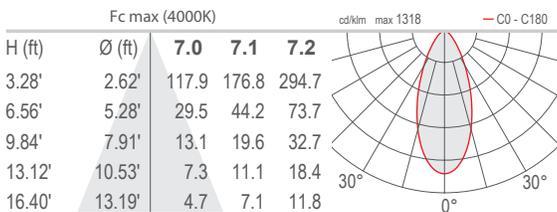

#### K - 78°

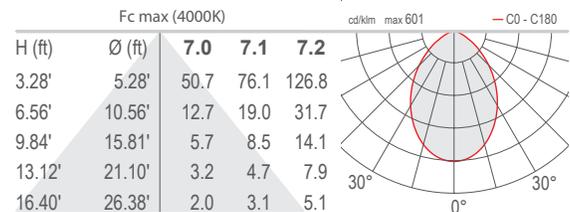

#### W - 26°x58°

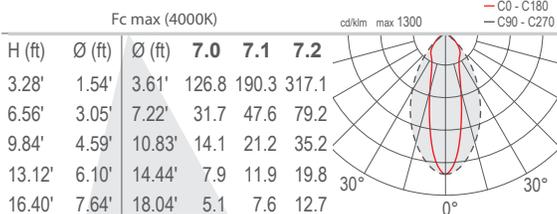

Job Name/Date:

Fixture Type Designation: