





^
NEVA 1.0
 3000K, 18W, 10°x40°
NEVA MINI 1
 3000K, 9W, 11°



12.44 in



NEVA MINI 1
 9W/13W 24VDC



NEVA MINI 2
 5.5W/7.5W 24VDC

24.25 in
 26.65 in



NEVA 1.0
 18W/25W 24VDC



NEVA 2.0
 11W/15W 24VDC



NEVA 3.0
 23W 120VAC
 ON/OFF, 0-10V

36.06 in
 40.83 in



NEVA 1.1
 27W/38W 24VDC



NEVA 2.1
 16W/22W 24VDC



NEVA 3.1
 39W 120VAC
 ON/OFF, 0-10V

59.72 in
 69.21 in



NEVA 1.2
 45W/63W 24VDC



NEVA 2.2
 27W/38W 24VDC



NEVA 3.2
 64W 120VAC
 ON/OFF



OUTDOOR LINEAR PROFILES ARCHITECTURAL LIGHTING FOR WALLS AND FACADES

2700K 3000K 4000K

PITCH 4.72 in
BUILT-IN POWER SUPPLY UNIT



RGB

PITCH 4.72 in



DYNAMIC WHITE

PITCH 4.72 in



RGBW


PITCH 4.72 in



NEVA MINI 5
10W 24VDC



NEVA MINI 6
10W 24VDC



NEVA MINI 7
15W 24VDC




NEVA 4.0
16W 230VAC
ON/OFF, 0/1-10V



NEVA 5.0
20W 24VDC
with or without DMX



NEVA 6.0
20W 24VDC



NEVA 7.0
30W 24VDC




NEVA 4.1
24W 230VAC
ON/OFF, 0/1-10V



NEVA 5.1
30W 24VDC



NEVA 6.1
30W 24VDC



NEVA 7.1
45W 24VDC




NEVA 4.2
40W 230VAC
ON/OFF, 0/1-10V



NEVA 5.2
50W 24VDC



NEVA 6.2
50W 24VDC



NEVA 7.2
75W 24VDC

11°

30°

45°

10°x40°


NEVA 2/4

11°

30°

45°

10°x40°

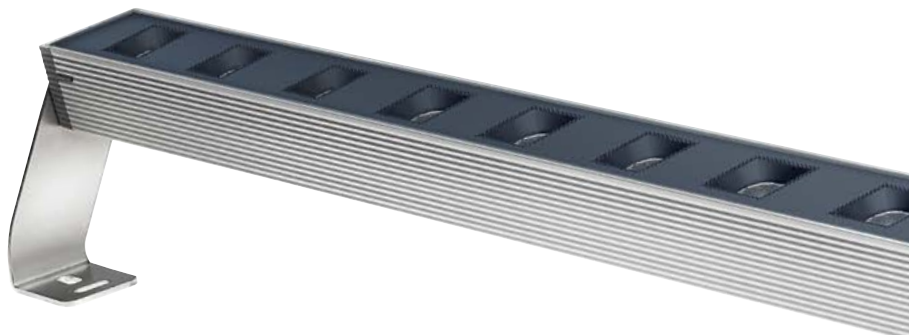IP65
IP67**IP65 / IP67**

SUITABLE FOR OUTDOOR APPLICATIONS



BUILT-IN PROTECTION SYSTEMS:

IPS

INTELLIGENT PROTECTION SYSTEM

**PID**

PROTECTIVE IMPEDANCE DEVICE

**NTC**

BUILT-IN TEMPERATURE SENSOR

IK06

IK06 (NEVA 1 / 2 / 5 / 6 / 7)

IK08

IK08 (NEVA 3 / 4)

HIGH-TRANSMITTANCE, TRANSPARENT, TEMPERED
EXTRA-CLEAR GLASS LENS WITH VITRIFIED SERIGRAPHY
TO ENSURE CHROMATIC UNIFORMITY OF LIGHT. THE GLASS'S
THICKNESS OF 0.16 in GUARANTEES HIGH IMPACT RESISTANCE

BODY IN LOW-COPPER-CONTENT
ANTICORODAL ALUMINUM ALLOY 6060
FOR EXCELLENT CORROSION RESISTANCE
AND IMPROVED HEAT DISSIPATION.
THE ANODIZATION PROCESS PROTECTS
THE FIXTURE'S FUNCTIONING AND
APPEARANCE FROM ATMOSPHERIC
AND ENVIRONMENTAL CONDITIONS



UNIQUE SELLING POINTS



ANTI-GLARE
RECESSED OPTICS



NEVA 1 / 3
LED SPACING CONSISTENCY
BETWEEN DEVICES
PLACED SIDE BY SIDE



NEVA 3 / 4
IP68 CONNECTOR WITH
BUILT-IN IPS PROTECTION

Speedy installation: electrical wiring simplified by the ability to connect the electrical cables directly to the connector. An in/out connection system is available to install the fixtures in a line.



RECESSED
INSTALLATION
USING DEDICATED
OUTER CASING



SCALED ADJUSTABLE
BRACKET AND TWO
DIFFERENT HEIGHTS:
2.95 in, 5.51 in




ANTI-GLARE
HONEYCOMB
LOUVRE ACCESSORY



< **NEVA 1.1**
2700K, 27W, 10°x40°, with honeycomb louvre
customized version with CRI >90

BRIGHT 1.6
2700K, 2W, 10°

Light planning by / Susanna Antico
Lighting Design Studio
Cascina Ranverso
Buttiglieria Alta, Turin, Italy




NEVA MINI 1



POWER / MODEL CODE	
	9W 24VDC 12.44 in LED spacing 2.4" NV0100 ■ ■ A - ■
	13W 24VDC 12.44 in LED spacing 2.4" NV0101 ■ ■ A - ■
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 30° L - 45° W - 10°x40°
POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 2x0.03 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

LUMEN OUTPUT AT SOURCE	696 lm (3000K, 9W) 1033 lm (3000K, 13W)
DELIVERED LUMEN OUTPUT	575 lm (3000K, 30°, 9W) 805 lm (3000K, 30°, 13W)
NO. AND TYPE OF LED	5 power LEDs, LED spacing 2.4" 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorodal aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page

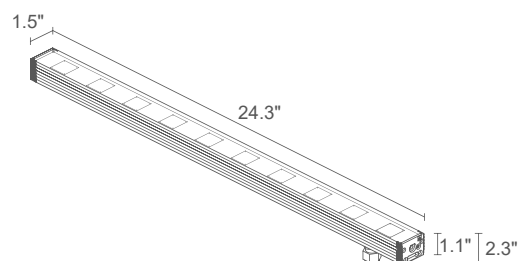



NEVA 1.0



POWER / MODEL CODE	
	18W 24VDC 24.25 in LED spacing 2.4" NV1000 ■ ■ A - ■
	25W 24VDC 24.25 in LED spacing 2.4" NV1001 ■ ■ A - ■
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 30° L - 45° W - 10°x40°
POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 2x0.03 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

LUMEN OUTPUT AT SOURCE	1392 lm (3000K, 18W) 2065 lm (3000K, 25W)
DELIVERED LUMEN OUTPUT	1150 lm (3000K, 30°, 18W) 1610 lm (3000K, 30°, 25W)
NO. AND TYPE OF LED	10 power LEDs, LED spacing 2.4" 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorodal aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page



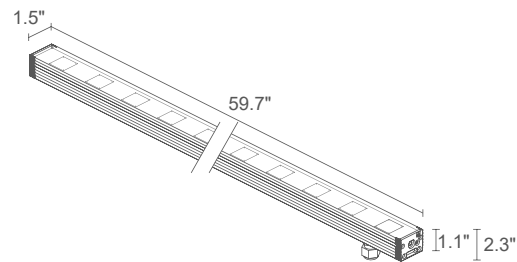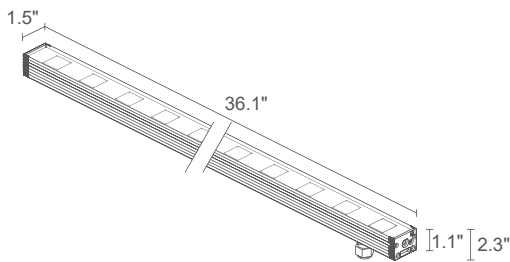

NEVA 1.1

CB

LED

TECH



3.62 lbs IP65 IP67 IK06

IPS PID NTC CASAMBI T max 45°C

27W 24VDC 36.06 in LED spacing 2.4"

NV1100 A - B

38W 24VDC 36.06 in LED spacing 2.4"

NV1101 A - B

F - 2700K
S - 3000K
9 - 4000K

S - 11°
M - 30°
L - 45°
W - 10°x40°

includes 4.92 ft neoprene cable
 H05RN-F 2x0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

2087 lm (3000K, 27W)
 3098 lm (3000K, 38W)

1715 lm (3000K, 30°, 27W)
 2401 lm (3000K, 30°, 38W)

15 power LEDs, LED spacing 2.36 in
 3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in anodized anticorrosional aluminum
 lens in serigraphed and transparent, tempered extra-clear glass

Remote power supply required, not included

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

NEVA 1.2

CB

LED

TECH



6.06 lbs IP65 IP67 IK06

IPS PID NTC CASAMBI T max 45°C

45W 24VDC 59.72 in LED spacing 2.4"

NV1200 A - B

63W 24VDC 59.72 in LED spacing 2.4"

NV1201 A - B

F - 2700K
S - 3000K
9 - 4000K

S - 11°
M - 30°
L - 45°
W - 10°x40°

includes 4.92 ft neoprene cable
 H05RN-F 2x0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

3479 lm (3000K, 45W)
 5163 lm (3000K, 63W)

2875 lm (3000K, 30°, 45W)
 4025 lm (3000K, 30°, 63W)


25 power LEDs, LED spacing 2.36 in
 3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in anodized anticorrosional aluminum
 lens in serigraphed and transparent, tempered extra-clear glass

Remote power supply required, not included

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

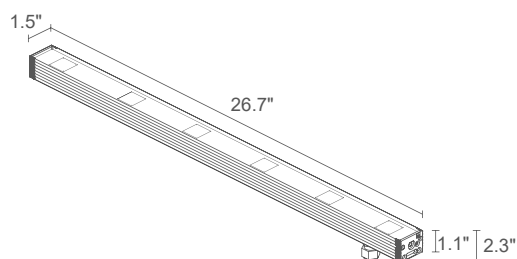

NEVA 2.0






 2.76 lbs

IP65
 IP67
 IK06



 NTC CASAMBI

T max 45°C

11W 24VDC 26.65 in LED Spacing 4.7"



NV2000

A - 

15W 24VDC 26.65 in LED Spacing 4.7"



NV2001

A - 



F - 2700K
S - 3000K
9 - 4000K





S - 11°
M - 30°
L - 45°
W - 10°x40°



includes 4.92 ft neoprene cable
 H05RN-F 2x0.03 Ø6.3 mm
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

835 lm (3000K, 11W) 1239 lm (3000K, 15W)
690 lm (3000K, 30°, 11W) 966 lm (3000K, 30°, 15W)
6 power LEDs, LED spacing 4.72 in 3-step MacAdam 50000h L90 B10 (Ta 25°C)
body in anodized anticorodal aluminum lens in serigraphed and transparent, tempered extra-clear glass
Remote power supply required, not included
surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
see accessories page

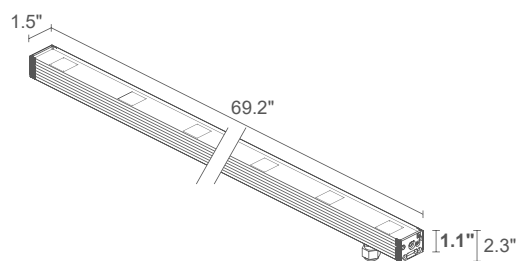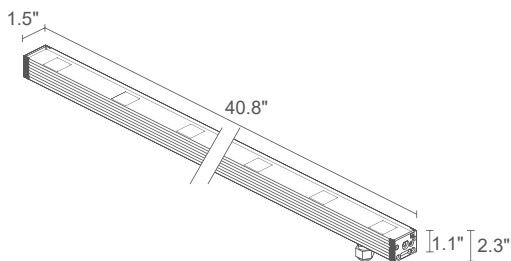

NEVA 2.1

CB	IS 10322	LED TECH	
4.12 lbs	IP65	IP67	IK06
IPS PID NTC CASAMBI T max 45°C			

16W 24VDC 40.83 in LED spacing 4.7"

NV2100 A - B

22W 24VDC 40.83 in LED spacing 4.7"

NV2101 A - B

F - 2700K S - 3000K 9 - 4000K	S - 11° M - 30° L - 45° W - 10°x40°	includes 4.92 ft neoprene cable H05RN-F 2x0.03 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft
---	---	---

1252 lm (3000K, 16W)

1859 lm (3000K, 22W)

1035 lm (3000K, 30°, 16W)

1450 lm (3000K, 30°, 22W)

9 power LEDs, pitch 4.72 in

3-step MacAdam

50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminum

lens in serigraphed and transparent, tempered extra-clear glass

Remote power supply required, not included

surface mounted (ceiling, wall, ground) with brackets

recessed (ceiling, wall, ground) with outer casing

see accessories page

NEVA 2.2

CB	IS 10322	LED TECH	
6.94 lbs	IP65	IP67	IK06
IPS PID NTC CASAMBI T max 45°C			

27W 24VDC 69.21 in LED spacing 4.7"

NV2200 A - B

38W 24VDC 69.21 in LED spacing 4.7"

NV2201 A - B

F - 2700K S - 3000K 9 - 4000K	S - 11° M - 30° L - 45° W - 10°x40°	includes 4.92 ft neoprene cable H05RN-F 2x0.03 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft
---	---	---

2087 lm (3000K, 27W)

3098 lm (3000K, 38W)

1725 lm (3000K, 30°, 27W)

2415 lm (3000K, 30°, 38W)

15 power LEDs, pitch 4.72 in

3-step MacAdam

50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminum

lens in serigraphed and transparent, tempered extra-clear glass

Remote power supply required, not included


surface mounted (ceiling, wall, ground) with brackets

recessed (ceiling, wall, ground) with outer casing

see accessories page






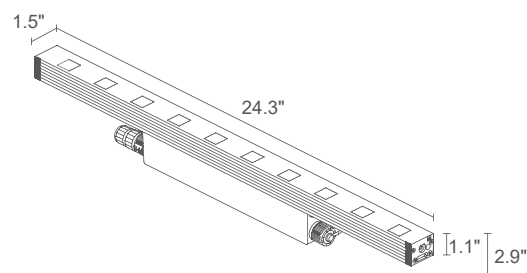


NEVA 3.0

 LED TPO  IP65  IP67  IK08  3.53 lbs  IPS  PID 0-10V  T max 45°C			
POWER / MODEL CODE	23W 120VAC 2.02 in LED Spacing 2.4" ON/OFF		
	NV3010000	  	N Anodized black
	23W 120VAC 2.02 in LED Spacing 2.4" 0-10V		
	NV30100V0	  	N Anodized black
 HONEYCOMB LOUVRE	0 - not present 1 - present		
 LED COLOR	F - 2700K 5 - 3000K 9 - 4000K		
 OPTICS	S - 11° M - 30° L - 45° W - 10°x40°		

LUMEN OUTPUT AT SOURCE	25070 lm (3000K)
DELIVERED LUMEN OUTPUT	16110 lm (3000K, 30°)
NO. AND TYPE OF LED	10 power LEDs, LED spacing 2.4" 3-step MacAdam, 50000h L85 B10 (Ta 25°C)
MATERIAL	body in black-anodized anticorodal aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page
FEATURES	fast installation: direct connection between fixture and mains power supply

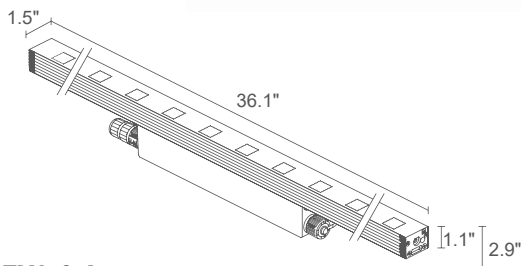

NEVA 3.1

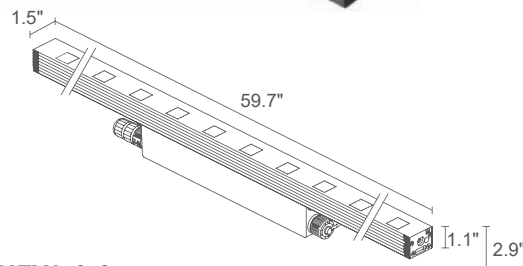

NEVA 3.2

4.63 lbs IP65 IP67 IK08
 LED TECH
 0-10V (T max 45°C)

39W 120VAC 36.06 in LED Spacing 2.4" ON/OFF
NV3110000 Anodized black

39W 120VAC 36.06 in LED Spacing 2.4" 0-10V
NV31100V0 Anodized black

	0 - not present 1 - present
	F - 2700K 5 - 3000K 9 - 4000K
	S - 11° M - 30° L - 45° W - 10°x40°

3855 lm (3000K)

2401 lm (3000K, 30°)

15 power LEDs, LED spacing 2.36 in
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

built in

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

fast installation: direct connection between
 fixture and mains power supply

7.05 lbs IP65 IP67 IK08
 LED TECH
 0-10V (T max 45°C)

64W 120VAC 59.72 in LED Spacing 2.4" ON/OFF
NV3210000 Anodized black

	0 - not present 1 - present
	F - 2700K 5 - 3000K 9 - 4000K
	S - 11° M - 30° L - 45° W - 10°x40°

6425 lm (3000K)

4025 lm (3000K, 30°)

25 power LEDs, LED spacing 2.36 in
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)


body in black-anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

built in

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page


fast installation: direct connection between
 fixture and mains power supply



Anodized black



< **NEVA 4.0 / 4.1**
3000K, 16W - 24W, 10°x40°, with brackets

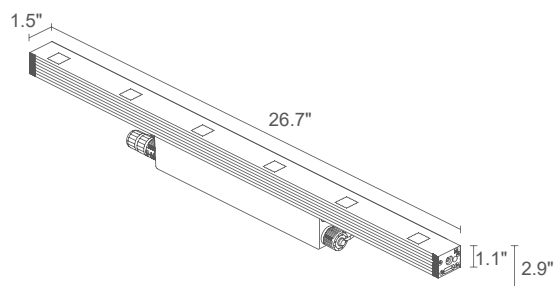

NEVA 4.0


3.75 lbs IP65 IP67 IK08

 0-10V T max 45°C


POWER / MODEL CODE	16W 120VAC 26.65 in LED spacing 4.7" ON/OFF NV4010000 N Anodized black
	16W 120VAC 26.65 in LED spacing 4.7" 0-10V NV40100V0 N Anodized black
HONEYCOMB LOUVRE	0 - not present 1 - present
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 30° L - 45° W - 10°x40°

LUMEN OUTPUT AT SOURCE	1542 lm (3000K)
DELIVERED LUMEN OUTPUT	966 lm (3000K, 30°)
NO. AND TYPE OF LED	6 power LEDs, pitch 4.72 in 3-step MacAdam, 50000h L85 B10 (Ta 25°C)
MATERIAL	body in black-anodized anticorodal aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page
FEATURES	fast installation: direct connection between fixture and mains power supply



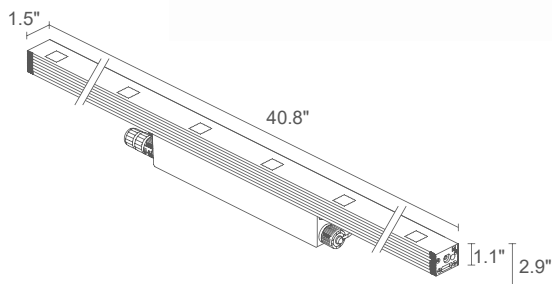

NEVA 4.1

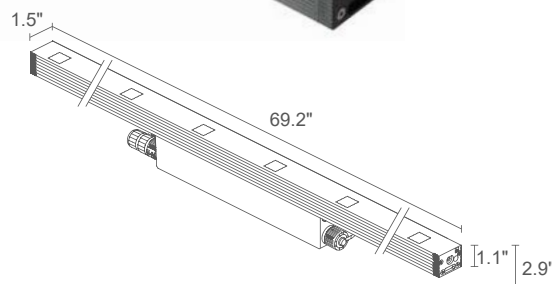

NEVA 4.2



5.16 lbs IP65 IP67 IK08

IPS PID 0-10V T max 45°C

24W 120VAC 40.83 in LED spacing 4.7" 120 ON/OFF
NV4110000 ■ ■ ■ ■ ■ Anodized black

24W 120VAC 40.83 in LED spacing 4.7" 0-10V
NV41100V0 ■ ■ ■ ■ ■ Anodized black

■	0 - not present 1 - present
■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 11° M - 30° L - 45° W - 10°x40°

2313 lm (3000K)

1450 lm (3000K, 30°)

9 power LEDs, pitch 4.72 in
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

built in

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

fast installation: direct connection between
 fixture and mains power supply



7.98 lbs IP65 IP67 IK08

IPS PID 0-10V T max 45°C

40W 120VAC 69.21 in LED spacing 4.7" ON/OFF
NV4210000 ■ ■ ■ ■ ■ Anodized black

40W 120VAC 69.21 in LED spacing 4.7" 0-10V
NV42100V0 ■ ■ ■ ■ ■ Anodized black

■	0 - not present 1 - present
■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 11° M - 30° L - 45° W - 10°x40°

3855 lm (3000K)

2415 lm (3000K, 30°)

15 power LEDs, pitch 4.72 in
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)


body in black-anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

built in

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

fast installation: direct connection between
 fixture and mains power supply






< **NEVA 5.2**
RGB, 50W, 24°x46°, with brackets

NEVA 2.2
3000K, 27W, 11°, with brackets

Project by / iarchitects
Gotha Cosmetics Headquarters
Bergamo, Italy



NEVA MINI 5



POWER / MODEL CODE

10W 24VDC 12.44 in LED spacing 4.7"
NV0500 6 ■ A - ■

OPTICS

S - 15°
M - 26°
L - 30°
W - 24°x46°


POWER CABLES

includes 4.92 ft neoprene cable
05RN-F 4x0.50 Ø0.23 in
1 - 16.40'
2 - 32.81'
3 - 49.21'
4 - 65.62'

LED COLOR

RGB

LUMEN OUTPUT AT SOURCE	454 lm, R: 151 lm G: 227 lm B: 76 lm
DELIVERED LUMEN OUTPUT	324 lm, R: 108 lm G: 162 lm B: 54 lm (26°)
NO. AND TYPE OF LED	3 RGB LED groups, LED spacing 4.72 in 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page

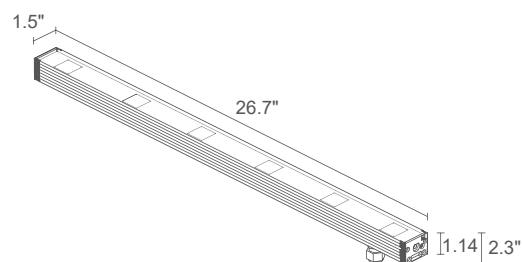

NEVA 5.0



20W 24VDC 26.65 in LED spacing 4.7"
NV5000 6 ■ A - ■

20W 24VDC + DMX512 26.65 in LED spacing 4.7"
NV5001 6 ■ A


S - 15°
M - 26°
L - 30°
W - 24°x46°

includes 4.92 ft neoprene cable 05RN-F 4x0.02 Ø0.23 in DMX version: includes 2x4.92 ft neoprene cables H05RN-F 2x0.03 Ø0.25 in and 05RN-F 4x0.02 Ø0.23 in
1 - 16.40'
2 - 32.81'
3 - 49.21'
4 - 65.62'

RGB

LUMEN OUTPUT AT SOURCE	908 lm, R: 303 lm G: 454 lm B: 151 lm
DELIVERED LUMEN OUTPUT	648 lm, R: 216 lm G: 324 lm B: 108 lm (26°)
NO. AND TYPE OF LED	6 RGB LED groups, LED spacing 4.72 in 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page




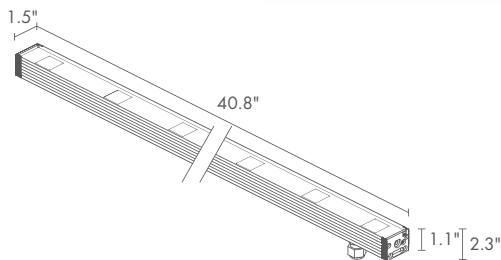

NEVA 5.1



30W 24VDC 40.8" LED Spacing 4.7"
NV5100 6 ■ A - ■

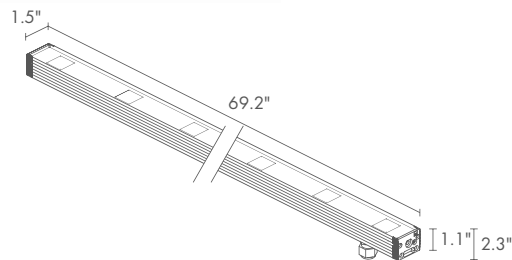

NEVA 5.2



50W 24VDC 69.2" LED Spacing 4.7"
NV5200 6 ■ A - ■

■	S - 15° M - 26° L - 30° W - 24°x46°
■	includes 4.92' neoprene cable 05RN-F 4x0.50 Ø0.23" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'
RGB	

■	S - 15° M - 26° L - 30° W - 24°x46°
■	includes 4.92' neoprene cable 05RN-F 4x0.50 Ø0.23" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'
RGB	

1363 lm, R: 455 lm G: 681 lm B: 227 lm

972 lm, R: 324 lm G: 486 lm B: 162 lm (26°)

9 RGB LED groups, LED spacing 4.7"
 50000h L90 B10 (Ta 25°C)

body in anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

Remote power supply required, not included

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

2271 lm, R: 758 lm G: 1135 lm B: 378 lm

1620 lm, R: 540 lm G: 810 lm B: 270 lm (26°)


15 RGB LED groups, LED spacing 4.7"
 50000h L90 B10 (Ta 25°C)

body in anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass



Remote power supply required, not included

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

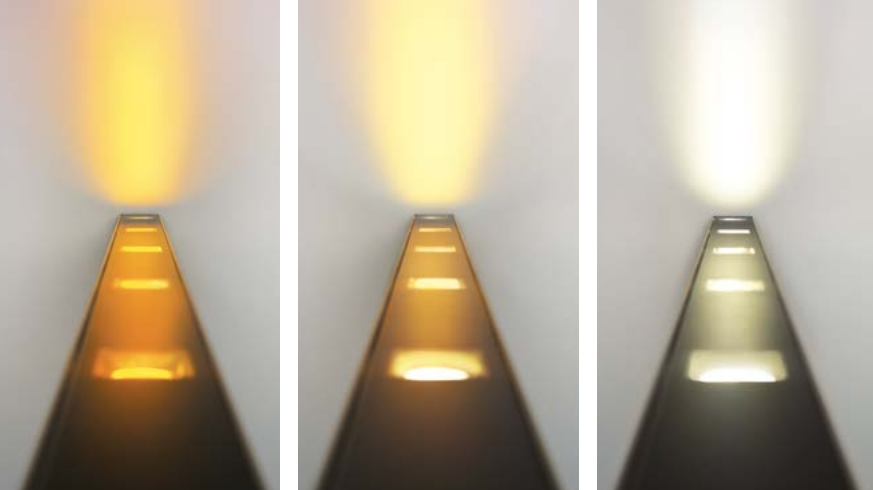

< **NEVA 6.0**
dynamic white, 20W, 24°x46°

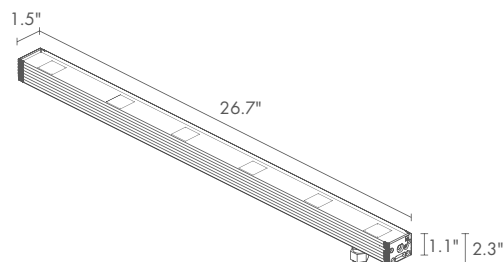

NEVA MINI 6

 CB      1.28 lbs IP65 IP67 IK06   (T max 45°C)	
POWER / MODEL CODE	10W 24VDC 12.44" LED Spacing 4.72" NV0600 H ■ A - ■
OPTICS	S - 15° M - 26° L - 30° W - 24°x46°
POWER CABLES	includes 4.92' neoprene cable 05RN-F 4x0.50 Ø0.23" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'
LED COLOR	dynamic white: amber, 4000K, 5000K


LUMEN OUTPUT AT SOURCE	1035 lm, amber: 258 lm 4000K: 379 lm 5000K: 398 lm (4000K)
DELIVERED LUMEN OUTPUT	737 lm, amber: 184 lm 4000K: 270 lm 5000K: 283 lm (4000K, 26°)
NO. AND TYPE OF LED	3 LED groups, LED Spacing 4.72" 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorodal aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing

NEVA 6.0

 CB     2.76 lbs IP65 IP67 IK06   (T max 45°C)	
POWER / MODEL CODE	20W 24VDC 26.65" LED Spacing 4.72" NV6000 H ■ A - ■
OPTICS	S - 15° M - 26° L - 30° W - 24°x46°
POWER CABLES	includes 4.92' neoprene cable 05RN-F 4x0.50 Ø0.23" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'
LED COLOR	dynamic white: amber, 4000K, 5000K

LUMEN OUTPUT AT SOURCE	2070 lm, amber: 517 lm 4000K: 758 lm 5000K: 795 lm (4000K)
DELIVERED LUMEN OUTPUT	1475 lm, amber: 368 lm 4000K: 540 lm 5000K: 567 lm (4000K, 26°)
NO. AND TYPE OF LED	6 LED groups, LED Spacing 4.72" 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorodal aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing



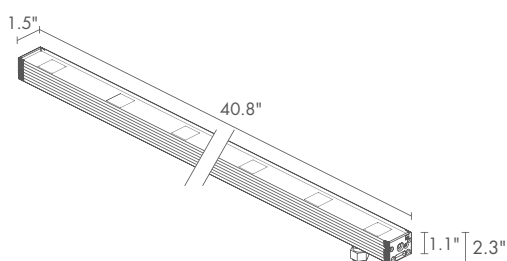

NEVA 6.1



30W 24VDC 40.83" LED Spacing 4.72"
NV6100 H ■ A - ■

■ **S** - 15°
M - 26°
L - 30°
W - 24°x46°

■ includes 4.92' neoprene cable
 05RN-F 4x0.50 Ø0.23"
1 - 16.40'
2 - 32.81'
3 - 49.21'
4 - 65.62'

dynamic white: amber, 4000K, 5000K

3100 lm,
 amber: 774 lm 4000K: 1135 lm 5000K: 1191 lm
 (4000K)

2212 lm,
 amber: 552 lm 4000K: 810 lm 5000K: 850 lm
 (4000K, 26°)

9 LED groups, LED Spacing 4.72"
 50000h L90 B10 (Ta 25°C)

body in anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

Remote power supply required, not included

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

NEVA 6.2



50W 24VDC 69.21" LED Spacing 4.72"
NV6200 H ■ A - ■

■ **S** - 15°
M - 26°
L - 30°
W - 24°x46°

■ includes 4.92' neoprene cable
 05RN-F 4x0.50 Ø0.23"
1 - 16.40'
2 - 32.81'
3 - 49.21'
4 - 65.62'

dynamic white: amber, 4000K, 5000K

5162 lm,
 amber: 1288 lm 4000K: 1890 lm 5000K: 1984 lm
 (4000K)

3687 lm,
 amber: 920 lm 4000K: 1350 lm 5000K: 1417 lm
 (4000K, 26°)

15 LED groups, LED Spacing 4.72"
 50000h L90 B10 (Ta 25°C)

body in anodized anticorodal aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

Remote power supply required, not included


surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing



< NEVA 7.2

RGBW, 75W, 26°x58°

Project by / SC Servizi Integrati
Torre Bassano
Torre del Greco, Naples, Italy




NEVA MINI 7



POWER / MODEL CODE	15W 24VDC 12.44" LED Spacing 4.72" NV0700 7 ■ A
OPTICS	S - 18° M - 32° L - 44° K - 78° W - 26°x58°
LED COLOR	RGBW

LUMEN OUTPUT AT SOURCE	850 lm, R: 137 lm G: 300 lm B: 92 lm W: 321 lm (4000K)
DELIVERED LUMEN OUTPUT	525 lm, R: 84 lm G: 186 lm B: 57 lm W: 198 lm (4000K, 32°)
NO. AND TYPE OF LED	3 RGBW LED groups, LED Spacing 4.72" 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 4.92' FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25"
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page

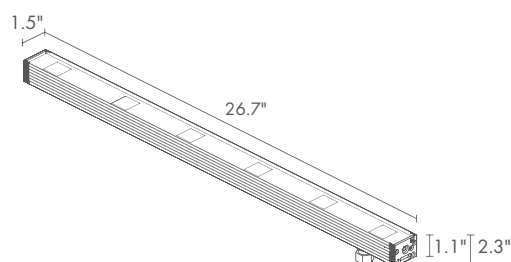



NEVA 7.0



POWER / MODEL CODE	30W 24VDC 26.65" LED Spacing 4.72" NV7000 7 ■ A
OPTICS	S - 18° M - 32° L - 44° K - 78° W - 26°x58°
LED COLOR	RGBW

LUMEN OUTPUT AT SOURCE	1699 lm, R: 273 lm G: 600 lm B: 184 lm W: 642 lm (4000K)
DELIVERED LUMEN OUTPUT	1051 lm, R: 169 lm G: 371 lm B: 114 lm W: 397 lm (4000K, 32°)
NO. AND TYPE OF LED	6 RGBW LED groups, LED Spacing 4.72" 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 4.92' FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25"
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see accessories page



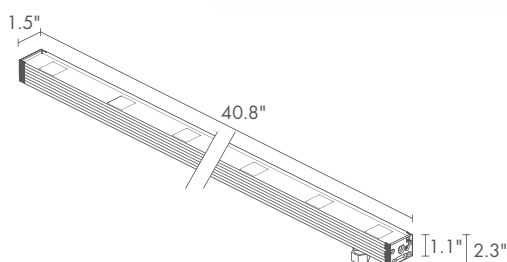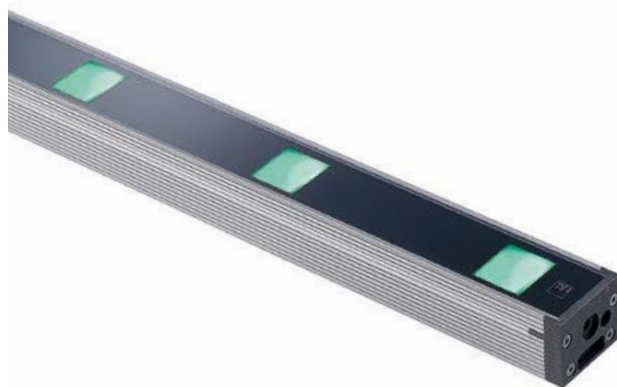

NEVA 7.1

**CB**

4.19 lbs

IP65 IP67 IK06



NTC CASAMBI

(T max 60°C)

45W 24VDC 40.83" LED Spacing 4.72"

NV7100 7 ■ A

S - 18°
M - 32°
L - 44°
K - 78°
W - 26°x58°

RGBW

2548 lm, R: 410 lm G: 900 lm B: 275 lm
 W: 963 lm (4000K)

1575 lm, R: 253 lm G: 556 lm B: 171 lm
 W: 595 lm (4000K, 32°)

9 RGBW LED groups, LED Spacing 4.72"
 50000h L90 B10 (Ta 25°C)


body in anodized anticorrosional aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

Remote power supply required, not included

includes 4.92" FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25"

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

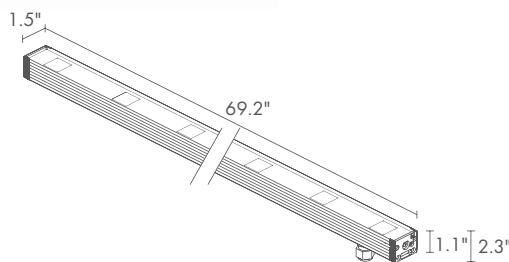

NEVA 7.2

**CB**

7.05 lbs

IP65 IP67 IK06



NTC CASAMBI

(T max 60°C)

75W 24VDC 69.21" LED Spacing 4.72"

NV7200 7 ■ A

S - 18°
M - 32°
L - 44°
K - 78°
W - 26°x58°

RGBW

4247 lm, R: 683 lm G: 1500 lm B: 459 lm
 W: 1605 lm (4000K)

2625 lm, R: 422 lm G: 927 lm B: 284 lm
 W: 992 lm (4000K, 32°)

15 RGBW LED groups, LED Spacing 4.72"
 50000h L90 B10 (Ta 25°C)

body in anodized anticorrosional aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

Remote power supply required, not included

includes 4.92" FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25"

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see accessories page

ANTI-GLARE ACCESSORIES



Honeycomb louvre
built into the lighting fixture
order together with
the lighting fixture



Anti-glare shield
in black-painted
stainless steel

ACCESSORIES FOR INSTALLATION



Aluminum
outer casing



Aluminum outer casing
for plasterboard

NEVA MINI 1	WH6001	WB6500 - 12.91"	WC6500 - 12.68"	WC6700 - 12.68"
NEVA 1.0	WH6010	WB6510 - 24.09"	WC6510 - 24.49"	WC6710 - 24.49"
NEVA 1.1	WH6011	WB6511 - 35.91"	WC6511 - 36.30"	WC6711 - 36.30"
NEVA 1.2	WH6012	WB6512 - 59.57"	WC6512 - 59.92"	WC6712 - 59.92"
NEVA MINI 2	WH6002	WB6500 - 12.91"	WC6500 - 12.68"	WC6700 - 12.68"
NEVA 2.0	WH6020	WB6520 - 26.50"	WC6520 - 26.85"	WC6720 - 26.85"
NEVA 2.1	WH6021	WB6521 - 40.67"	WC6521 - 41.02"	WC6721 - 41.02"
NEVA 2.2	WH6022	WB6522 - 69.06"	WC6522 - 69.41"	WC6722 - 69.41"
NEVA 3.0		WB6510 - 24.09"	WC6510 - 24.49"	WC6710 - 24.49"
NEVA 3.1		WB6511 - 35.91"	WC6511 - 36.30"	WC6711 - 36.30"
NEVA 3.2		WB6512 - 59.57"	WC6512 - 59.92"	WC6712 - 59.92"
NEVA 4.0		WB6520 - 26.50"	WC6520 - 26.85"	WC6720 - 26.85"
NEVA 4.1		WB6521 - 40.67"	WC6521 - 41.02"	WC6721 - 41.02"
NEVA 4.2		WB6522 - 69.06"	WC6522 - 69.41"	WC6722 - 69.41"
NEVA MINI 5	WH6002	WB6500 - 12.91"	WC6500 - 12.68"	WC6700 - 12.68"
NEVA 5.0	WH6020	WB6520 - 26.50"	WC6520 - 26.85"	WC6720 - 26.85"
NEVA 5.1	WH6021	WB6521 - 40.67"	WC6521 - 41.02"	WC6721 - 41.02"
NEVA 5.2	WH6022	WB6522 - 69.06"	WC6522 - 69.41"	WC6722 - 69.41"
NEVA MINI 6	WH6002	WB6500 - 12.91"	WC6500 - 12.68"	WC6700 - 12.68"
NEVA 6.0	WH6020	WB6520 - 26.50"	WC6520 - 26.85"	WC6720 - 26.85"
NEVA 6.1	WH6021	WB6521 - 40.67"	WC6521 - 41.02"	WC6721 - 41.02"
NEVA 6.2	WH6022	WB6522 - 69.06"	WC6522 - 69.41"	WC6722 - 69.41"
NEVA MINI 7		WB6500 - 12.91"	WC6500 - 12.68"	WC6700 - 12.68"
NEVA 7.0		WB6520 - 26.50"	WC6520 - 26.85"	WC6720 - 26.85"
NEVA 7.1		WB6521 - 40.67"	WC6521 - 41.02"	WC6721 - 41.02"
NEVA 7.2		WB6522 - 69.06"	WC6522 - 69.41"	WC6722 - 69.41"



ACCESSORIES

ACCESSORIES FOR INSTALLATION



WM0601
Pair of brackets h 2.95"
(Neva 1 / 2 / 5 / 6 / 7)



WM0602
Pair of brackets h 5.51"
(Neva 1 / 2 / 5 / 6 / 7)



WMA01N
Pair of brackets h 2.95"
(Neva 3 / 4)



WMA02N
Pair of brackets h 5.51"
(Neva 3 / 4)



WN6001
Anti-fall kit



WN6005
Alignment kit
for outer casings



WFA00
2-pin male connector
for in/out connection
(on/off version) - IP68
(Neva 3 / 4)




WFA01
4-pin male connector
for in/out connection
(0-10V version) - IP68
(Neva 3.0 / 3.1 /
4.0 / 4.1 / 4.2)




OUTDOOR LINEAR PROFILES

NEVA MINI 1


S - 11°

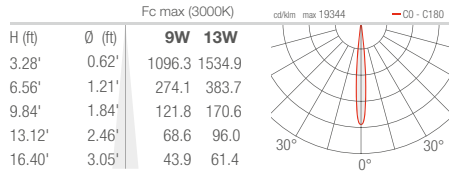


M - 30°

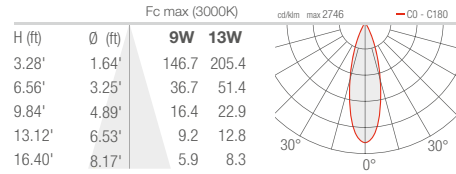

L - 45°

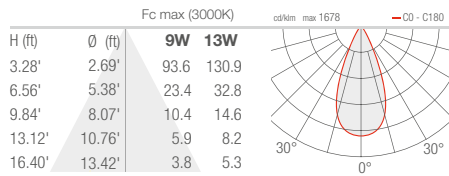


W - 10°x40°

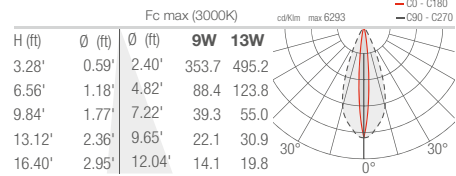


NEVA MINI 2


S - 11°

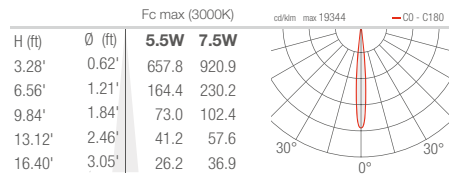


M - 30°

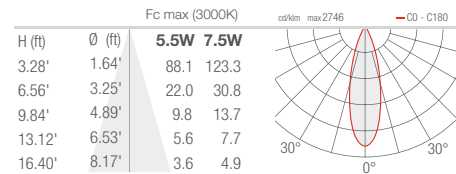

L - 45°

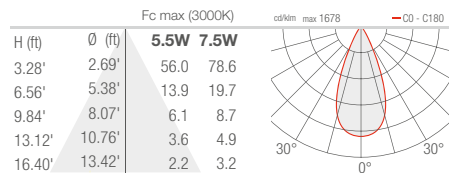


W - 10°x40°

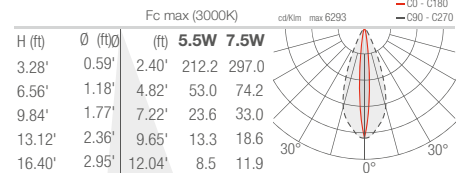


NEVA MINI 5


S - 15°

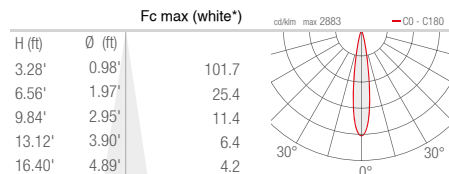


M - 26°

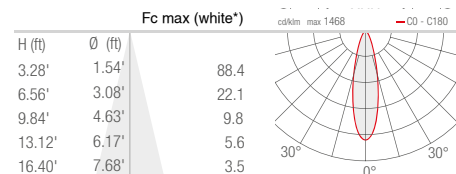

L - 30°

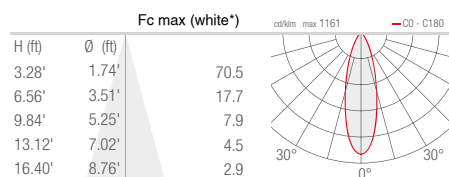


W - 24°x46°

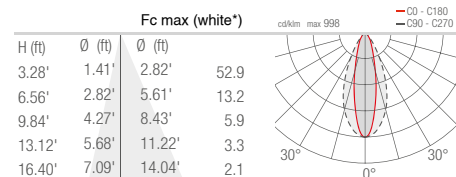


* White created by mixing the colors

NEVA MINI 6


S - 15°

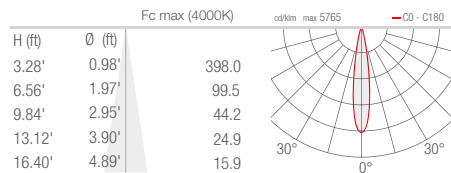


L - 30°

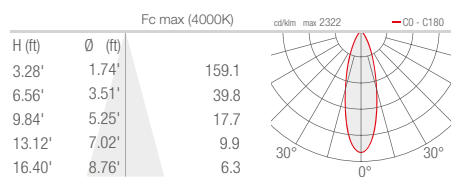

M - 26°

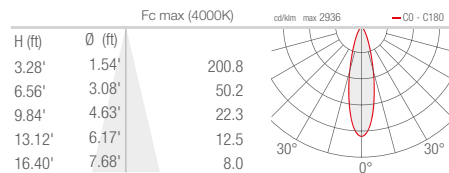


W - 24°x46°

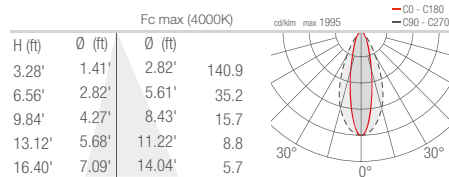


NEVA MINI 7


S - 18°

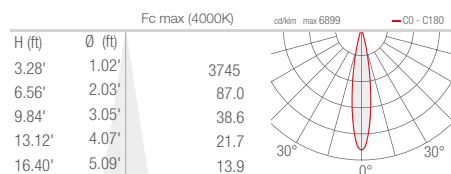


L - 44°

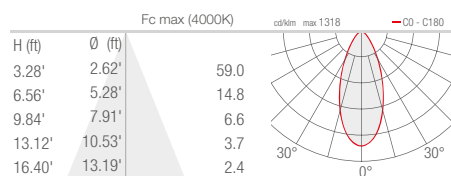


M - 32°

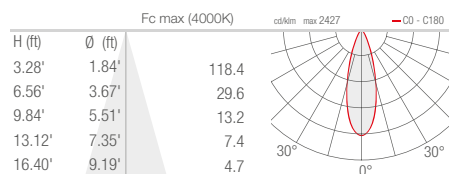

K - 78°

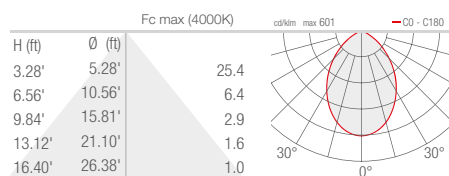


W - 26°x58°

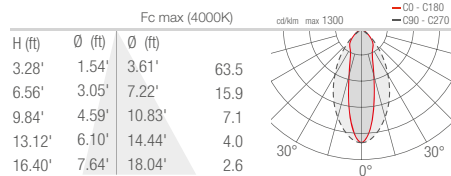




NEVA 1.0


S - 11°

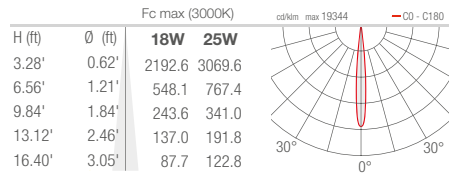


M - 30°

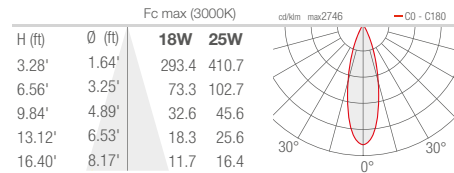

L - 45°

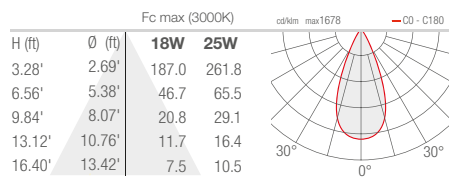


W - 10°x40°

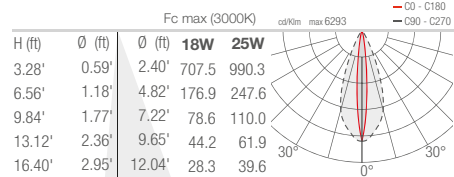


NEVA 2.0


S - 11°

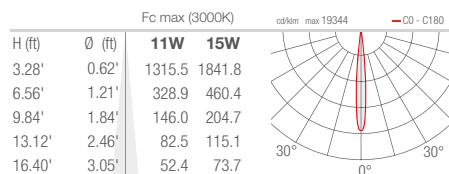


M - 30°

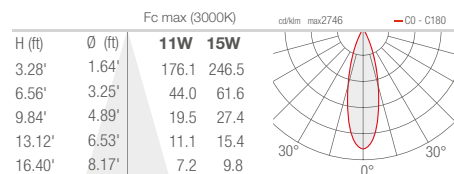

L - 45°

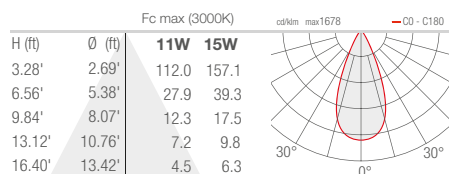


W - 10°x40°

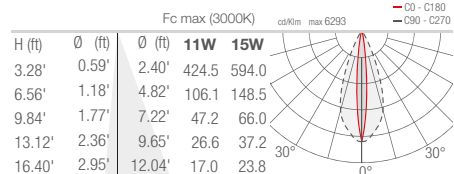


NEVA 3.0


S - 11°

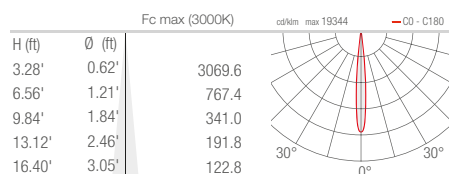


M - 30°

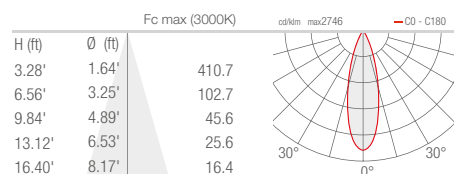

L - 45°

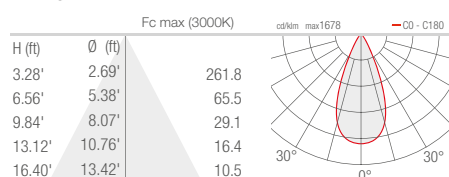


W - 10°x40°

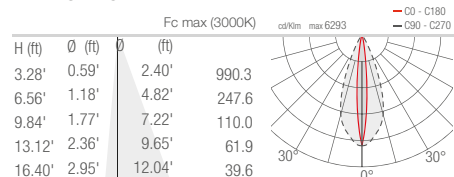


NEVA 4.0


S - 11°

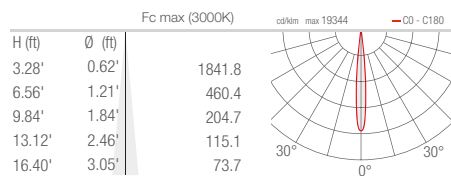


M - 30°

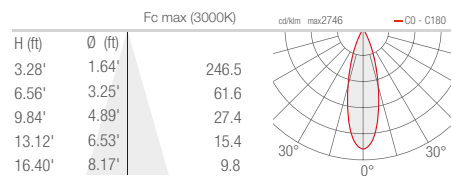

L - 45°

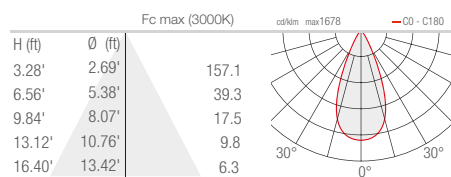


W - 10°x40°

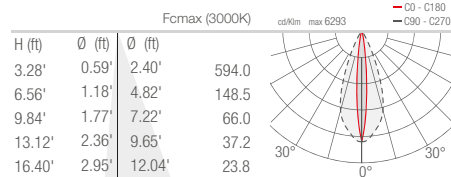


NEVA 5.0


S - 15°

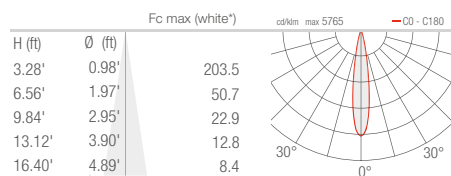


M - 26°

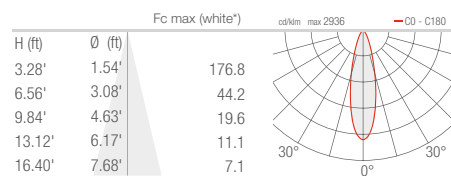

L - 30°

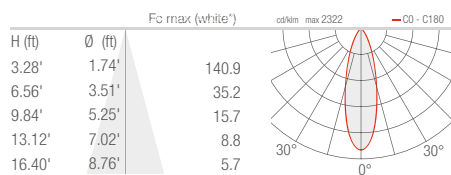

W - 24°x46°

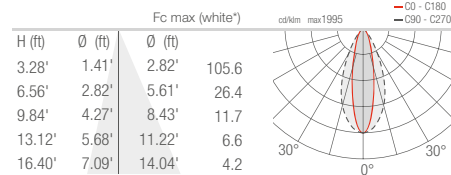


* White created by mixing the colours






NEVA 6.0


S - 15°

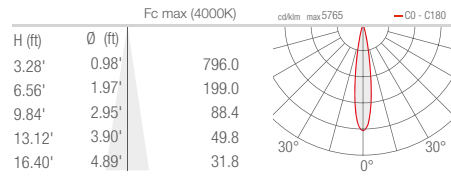


M - 26°

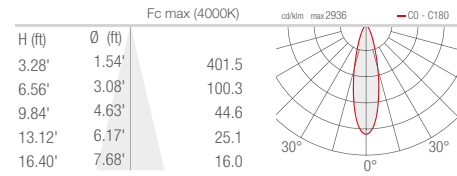

L - 30°

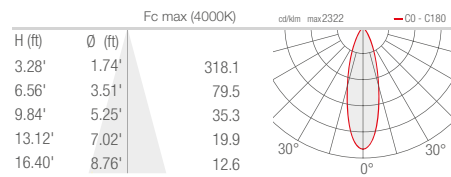


W - 24°x46°

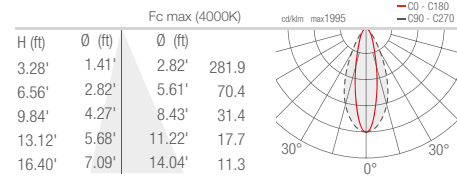


NEVA 7.0


S - 18°

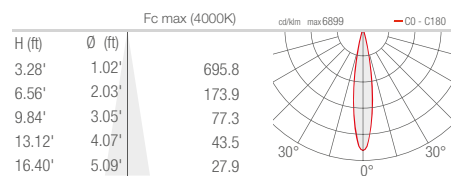


M - 32°

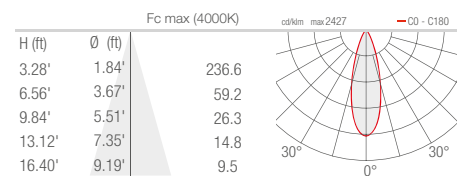

L - 44°

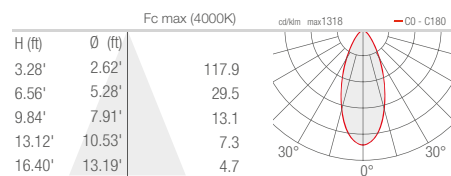

K - 78°

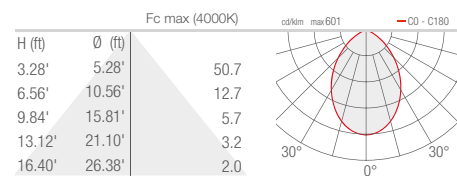

W - 26°x58°

