

Nine is a minimalist lighting solution that offers linear spread upper and diffused lower light emissions. Small details such as no power cord maintain the minimalistic idea without sacrificing function in the field. It is available in 4 or 8 foot lengths with multiple color temperature and finish options.



**MADE IN THE U.S.A.**

Fixture Dimensions  
See Drawing on page 2.

## TECHNICAL DATA

<b>Wattage / Input</b>	72W (4 ft), 96W (6 ft), 144W (8 ft) (120-277VAC - 347VAC available)
<b>Power Supply</b>	Integral (0-10V Dimming)
<b>Construction</b>	Body: Extruded Aluminum Mounting: Aircraft Cable
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	Up - 1848 lm, Down - 1866 lm (4 ft, 3000K)
<b>Efficacy</b>	Up: 25.6 lm/W, Down: 25.9 lm/W
<b>Optics</b>	Up: Linear Spread, Down: Diffuse
<b>Finishes</b>	4 Standard, See Below.
<b>Fixture Dimensions</b>	See page 2.
<b>LED Source</b>	Mid-Power LEDs
<b>IP Rating</b>	IP20

**Up and Down dim together**  
(Separate Dimming on request)  
**EXCEPT 8 ft. version, add suffix**  
**-DI for separate dimming**

## ORDERING INFORMATION

Example: D90-L-4-30-P-10-C-SW.

D90-L	-		-	P	-		-	
Model No.	Length	CCT	Body	Finish	Driver	Canopy		
D90-L	4 - 4 foot 6 - 6 foot 8 - 8 foot <i>Addition for 6- or 8-foot version must be added.</i>	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	P - Pendant	02 - Black Suede 18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom	C - 120-277VAC, 0-10V Dimming  2 - 347VAC, 0-10V Dimming  <b>NOTE:</b> 8 foot fixture suitable for UP/DOWN dimming together or separate as standard. For separate dimming, add suffix -DI to the end of the model number. (Not available on 4 or 6 foot fixture)	RC - Recessed* SC - Surface*  RW - Recessed, White SW - Surface, White AS - Surface Acoustical Tile* AW - Surface Acoustical Tile, White  <i>* Same finish as fixture - Other color on request -</i>		


**NOTE:** AS & AW utilize a rosette mounting pattern to allow direct mounting to a junction box that will hold a minimum of 50 lbs.

Job Name/Date:


Fixture Type Designation:

## FIXTURE DIMENSIONS

### 4 foot version

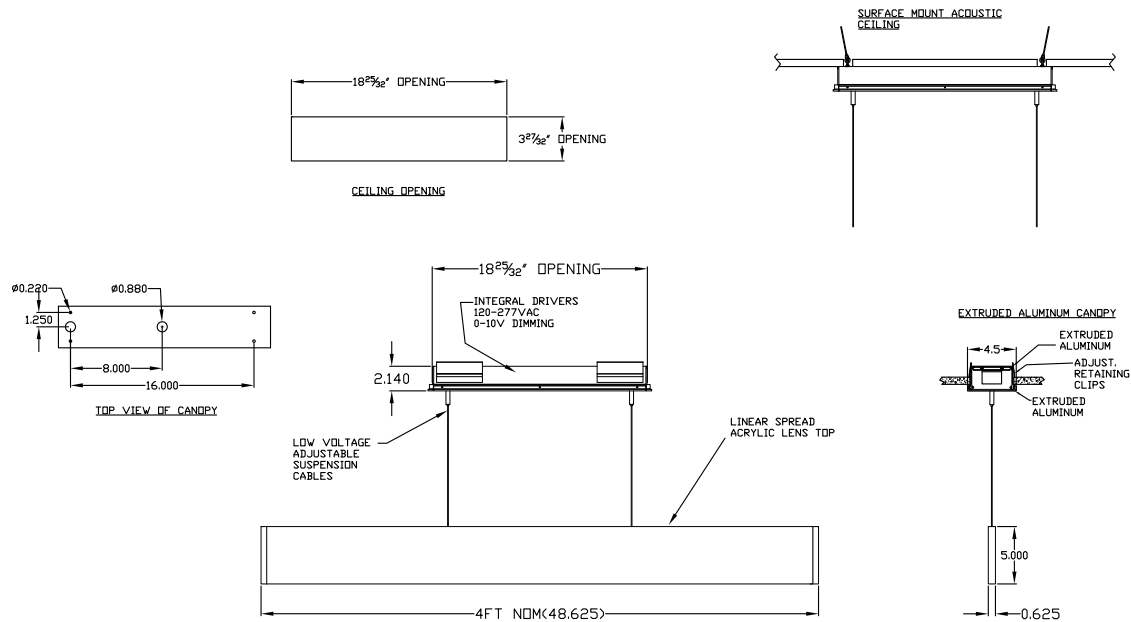


### 6 foot version

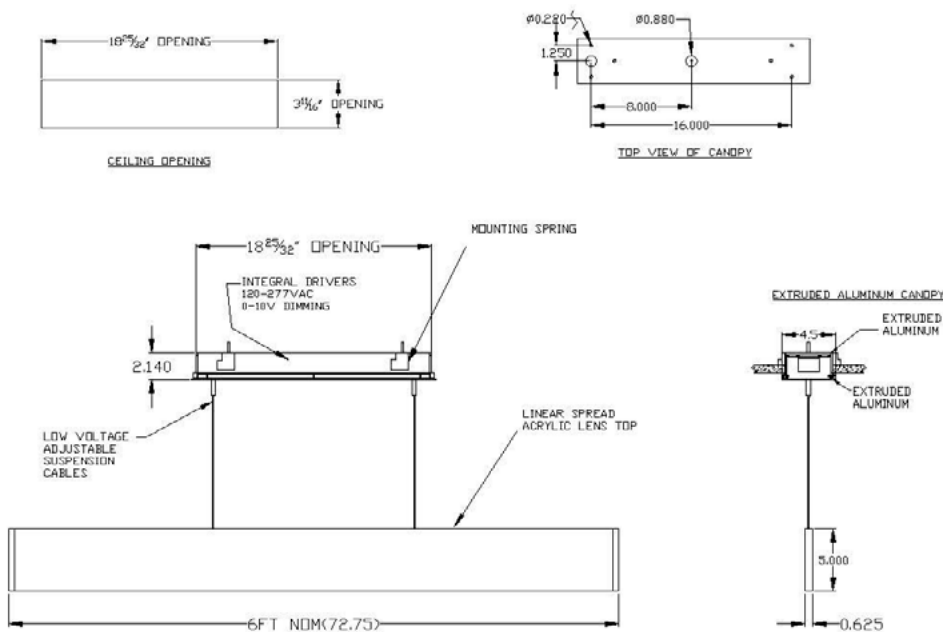

Job Name/Date:


Fixture Type Designation:

## 8 foot version

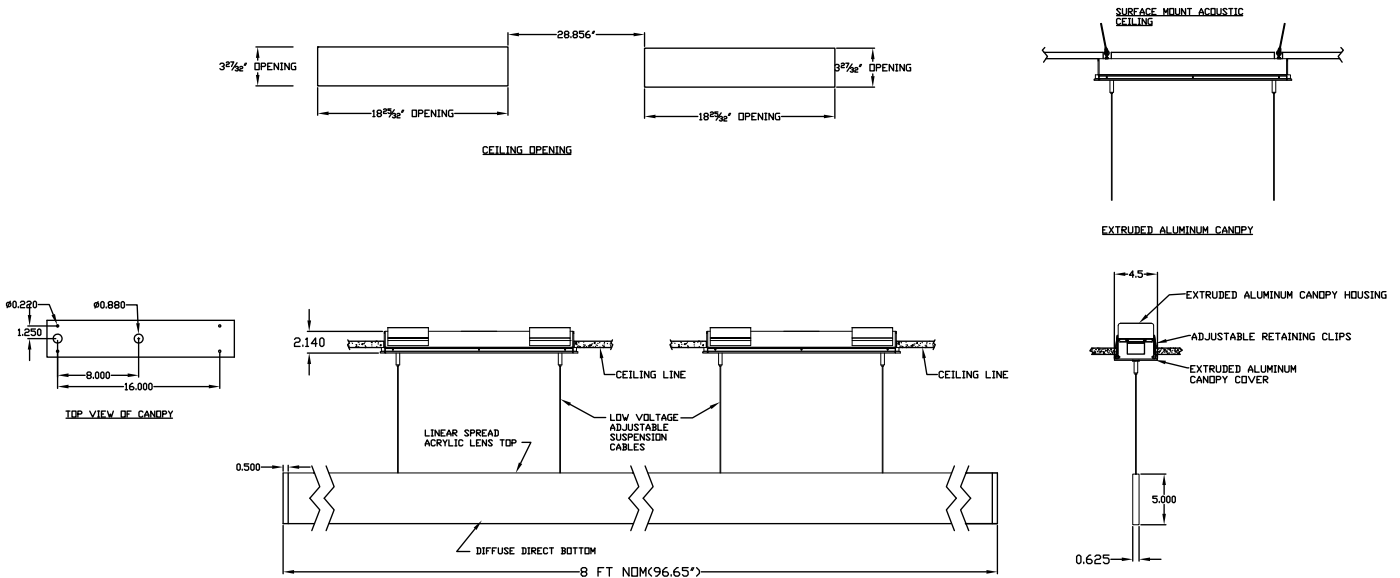

## PHOTOMETRIC DATA - Note: all Photometry is 3000K

Maximum Candela = 913

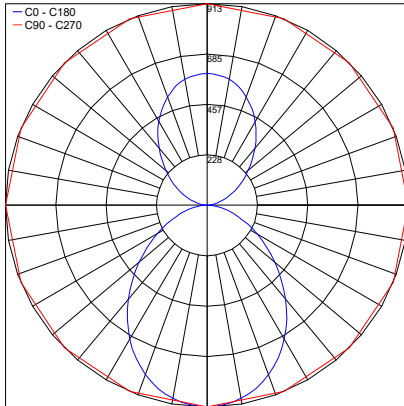

## ACCESSORIES - CONNECTORS for Continuous Run

Connectors Example: D90-C18021101

D90	-	C180	2		01
Model No.	Type	# of Ends	Finish	Option	
D90	C180 - 180° Connector	2 - 2 Ends	02 - Black Suede 18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom	01 - None	

Job Name/Date:

Fixture Type Designation: