


Nine is a minimalist lighting solution that offers linear spread upper and diffused lower light emissions. Small details such as no power cord maintain the minimalistic idea without sacrificing function in the field. It is available in 4 or 8 foot lengths with multiple color temperature and finish options.

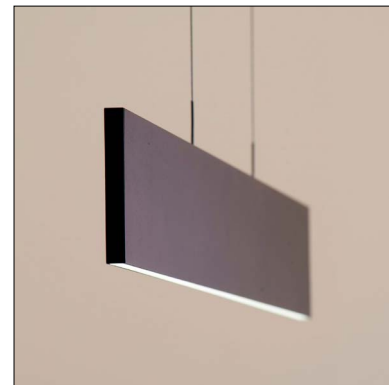

MADE IN THE U.S.A.

Fixture Dimensions
See Drawing on page 2.

TECHNICAL DATA

Wattage / Input	72W (4 ft), 144W (8 ft) (120-277VAC - 347VAC available)
Power Supply	Integral (0-10V Dimming)
Construction	Body: Extruded Aluminum Mounting: Aircraft Cable
CCT	2700K, 3000K, 3500K, 4000K
CRI	>90
Delivered Lumens	Up - 1848 lm, Down - 1866 lm (4 ft, 3000K)
Efficacy	Up: 25.6 lm/W, Down: 25.9 lm/W
Optics	Up: Linear Spread, Down: Diffuse
Finishes	4 Standard, See Below.
Fixture Dimensions	See page 2.
LED Source	Mid-Power LEDs
IP Rating	IP20

Up and Down dim together
(Separate Dimming on request)
EXCEPT 8 ft. version, add suffix
-DI for separate dimming

ORDERING INFORMATION

Example: D90-L-4-30-P-10-C-SW.

D90-L	-		-	P	-		-	
-------	---	--	---	---	---	--	---	--

Model No.	Length	CCT	Body	Finish	Driver	Canopy
D90-L	4 - 4 foot	27 - 2700K	P - Pendant	02 - Black Suede	C - 120-277VAC, 0-10V Dimming	RC - Recessed*
	6 - 6 foot	30 - 3000K		18 - Textured Bronze		SC - Surface*
	8 - 8 foot	35 - 3500K		TS - Silver	2 - 347VAC, 0-10V Dimming	RW - Recessed, White
	<i>Addition for 6- or 8-foot version must be added.</i>			40 - 4000K		11 - White Suede
				99 - Custom	NOTE: 8 foot fixture suitable for UP/DOWN dimming together or separate as standard. For separate dimming, add suffix -DI to the end of the model number. (Not available on 4 or 6 foot fixture)	AS - Surface Acoustical Tile*
						AW - Surface Acoustical Tile, White

* Same finish as fixture
- Other color on request -


NOTE: AS & AW utilize a rosette mounting pattern to allow direct mounting to a junction box that will hold a minimum of 50 lbs.

Job Name/Date:


Fixture Type Designation:

FIXTURE DIMENSIONS

4 foot version

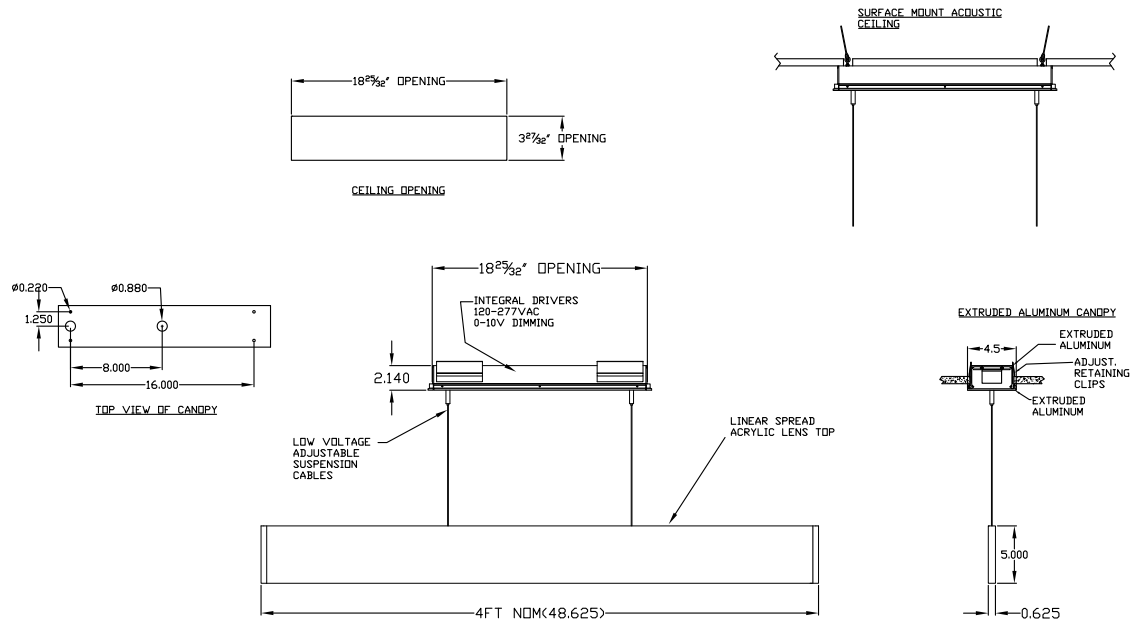

8 foot version

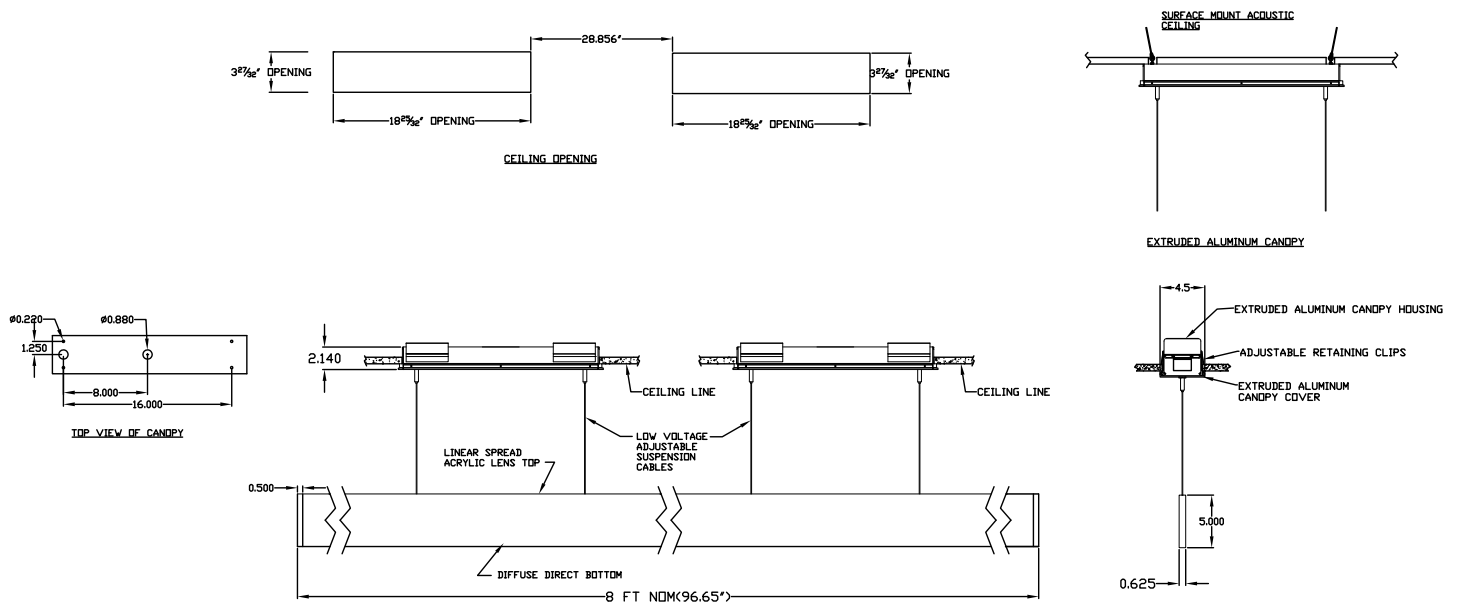


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 913

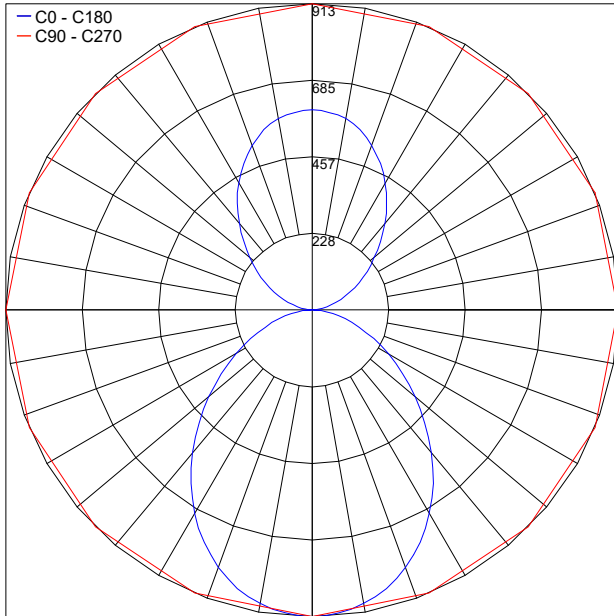

ACCESSORIES - CONNECTORS for Continuous Run

Connectors Example: D90-C18021101

D90	-	C180	2		01
Model No.	Type	# of Ends	Finish	Option	
D90	C180 - 180° Connector	2 - 2 Ends	02 - Black Suede 18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom	01 - None	

Job Name/Date:

Fixture Type Designation: