

Nine W is a wall mounted minimalist lighting solution that offers linear spread upper and diffused lower light emissions. It comes in 30", 36" or 48" lengths and continuous runs with connectors for inside or outside corners. It is available in 4 color temperatures and 4 standard finish options. Set screws on the side of the driver housing allows the fixture to pivot up for access to the driver. Continuous runs available.



MADE IN THE U.S.A.

Fixture Dimensions
See Drawing on page 2.

ADA COMPLIANT

**MOUNTING SCREWS
BY OTHERS**

TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 45W, 54W, 72W (120-277VAC) |
| Power Supply | Integral (0-10V Dimming) |
| Construction | Body: Extruded Aluminum |
| CCT | 2700K, 3000K, 3500K, 4000K |
| CRI | >90 |
| Delivered Lumens | Up - 1848 lm, Down - 1866 lm (4 ft, 3000K) |
| Efficacy | Up: 25.6 lm/W, Down: 25.9 lm/W |
| Optics | Up: Linear Spread, Down: Diffuse |
| Finishes | 4 Standard, See Below. |
| Fixture Dimensions | See page 2. |
| LED Source | Mid-Power LEDs |
| IP Rating | IP20 |
| Connectors | See page 3 |

ORDERING INFORMATION

Example: W90-L-3-01-30-TS-C-SC-1. Accessories ordered separately - see page 3.

| | | | | | | | | | | | | |
|-------|---|--|---|--|---|--|---|---|---|----|---|---|
| W90-L | - | | - | | - | | - | C | - | SC | - | 1 |
|-------|---|--|---|--|---|--|---|---|---|----|---|---|


| Model # | Length | Configuration | CCT | Finish | Driver | Mounting | Options |
|---------|----------|--------------------------------|------------|---------------------------------|----------------------------------|---|---------------|
| W90-L | 2 - 2.5' | 01 - Up & Down Dim Together | 27 - 2700K | 02 - Black Suede | C - 120-277VAC, 0-10V Dimming | SC - Surface * Same finish as fixture - Other color on request | 1 - Emergency |
| | 3 - 3.0' | | 30 - 3000K | 18 - Textured Bronze | | | |
| | 4 - 4.0' | 02 - Up & Down Dim Separate | 35 - 3500K | TS - Silver | | | |
| | | | 40 - 4000K | 11 - White Suede 99 - Custom | | | |

Job Name/Date:


Fixture Type Designation:

FIXTURE DIMENSIONS


48 inch version

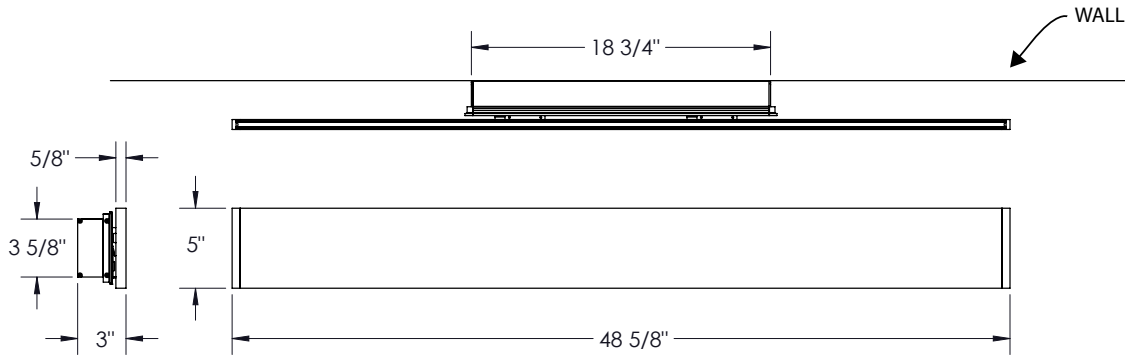

36 inch version

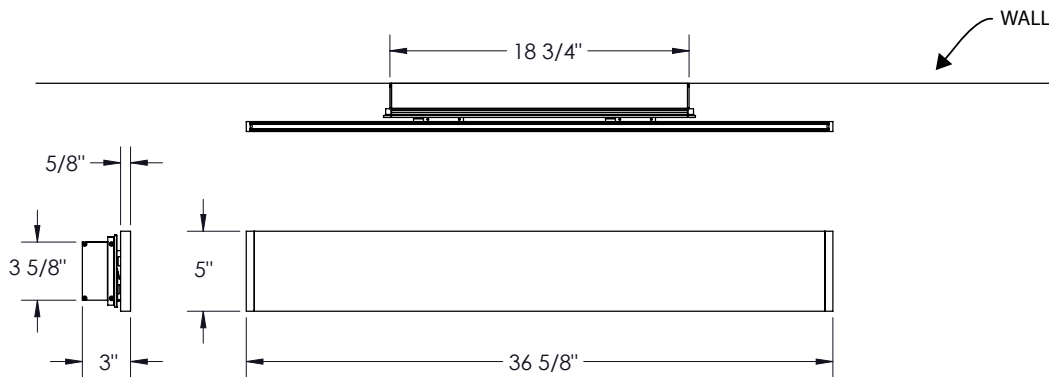

30 inch version

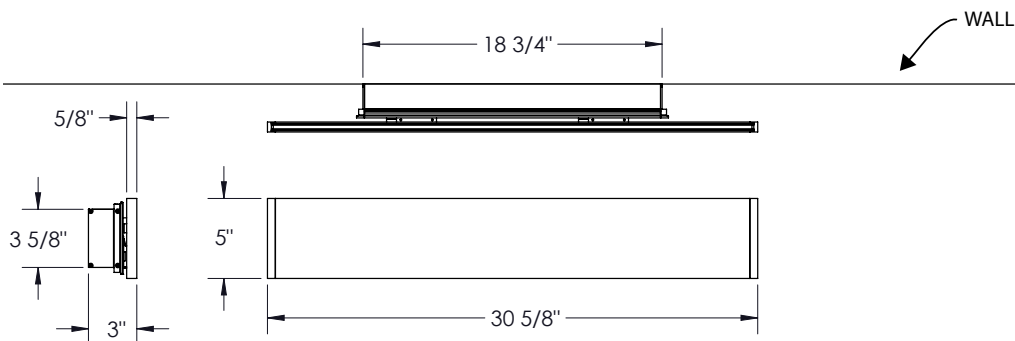


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Maximum Candela = 913

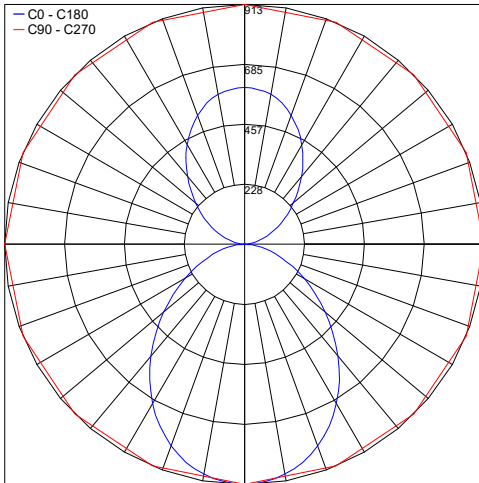


ACCESSORIES - CONNECTORS for Continuous Run

Connectors Example: W90-C90TS01

| | | | |
|------------------|--|---|------------------|
| W90 | - | | 01 |
| Model No. | Type of Connector | Finish | Option |
| W90 | C180 - 180° Connector C90 - 90° Connector | 02 - Black Suede 18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom | 01 - None |

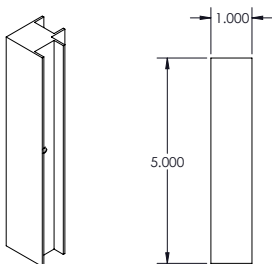

**MOUNTING SCREWS
BY OTHERS**

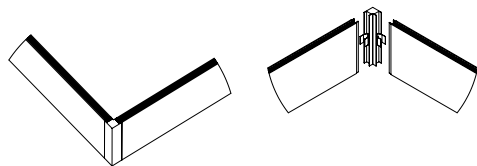

Job Name/Date:

Fixture Type Designation: