

NORMALL IP20

INDOOR

Fix (not adjustable) 0° - 0°

8.86"×14.37"

Material : CALCYT® plaster

NORMALL LED WARMDIM 900LM

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 105 73 600 phase DIM

REF N° 105 63 600 DIM 0-10V

12.8W - 120VAC - incl. line voltage
driver $\diamond$ - parallel wiring ∇ C-0.2m E
- P - 4 Step MacAdam - CRI 90

NORMALL LED 800LM

REF N°	2200°K	2700°K	3000°K
phase DIM (120VAC)	105 71 500	105 71 000	105 71 100
DIM 0-10V(120VAC)	105 61 500	105 61 000	105 61 100
Remote 350mA	105 29 500	105 29 000	105 29 100

9.3W - incl. line voltage or remote driver $\diamond$ -
parallel wiring ∇ C-0.2m E
- P - 2 Step MacAdam - CRI 90 - R9=2.95"

NORMALL LED 1000LM


REF N°	2700°K	3000°K	4000°K
phase DIM	105 72 000	105 72 100	105 72 200
DIM 0-10V	105 62 000	105 62 100	105 62 200

11W - 120VAC - incl. line voltage
driver $\diamond$ - parallel wiring ∇ C-0.2m E
- P - 2 Step MacAdam - CRI 90 -
R9=2.95"

NORMALL LED 2000LM

REF N°	2700°K	3000°K	4000°K
phase DIM	105 74 000	105 74 100	105 74 200
DIM 0-10V	105 64 000	105 64 100	105 64 200


14.1W - incl. line voltage
driver $\diamond$ - parallel wiring ∇ C-0.2m E
- P - 2 Step MacAdam - CRI 80

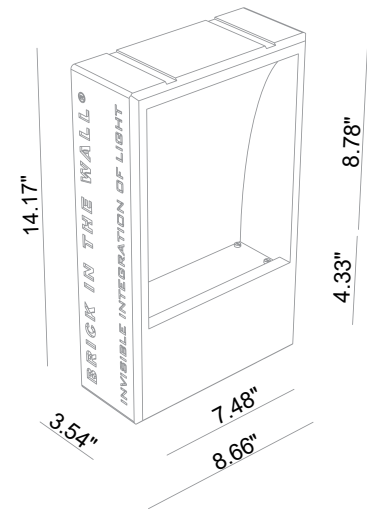

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT NORMALL

REF N° 705 01 000 For mounting into gypsum walls

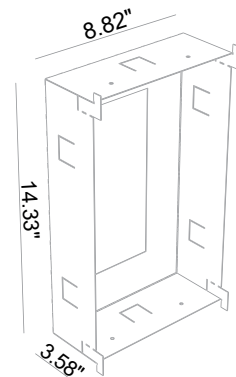

designplan®

BRICK IN THE WALL®
Invisible integration of light

