


NOVA



TOTALLY RECESSED FITTING WITH ROUNDED EDGES.

This indoor recessed lighting system made of AirCoral[®] has a rounded light hole and a total disappearance effect into plasterboard ceilings able to give great plasticity to the ceiling. The light created by Nova emphasizes the smooth effect given by the surfaces it is installed on.

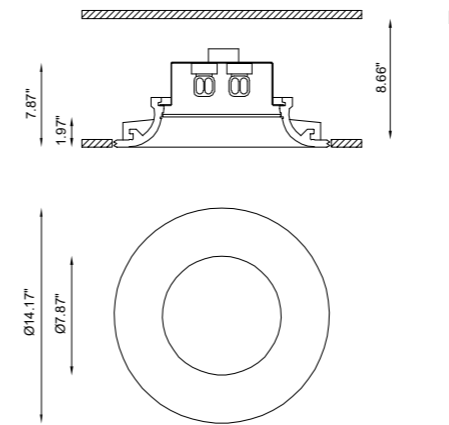

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

TECHNICAL FEATURES

Code	BU5291.AC (fig. B)	BU5293.AC (fig. B)
Type	Downlight 90° 	Downlight 90°
Material	AC: AirCoral [®]	AC: AirCoral [®]
Absorption capacity*	96.0 ft ²	96.0 ft ²
Weight	14.99 lbs	12.79 lbs
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Control gear	Constant current electronic driver	Dimmable constant current driver
Dimensions	Ø14.17" x 7.87"	A: 6.69"; B: 8.66"
Cut out for plasterboard	Ø 14.57"	Ø 14.57"
Lamp type	LED 1050mA 	LED 350 mA
Lamp wattage	1 x 40W	2 x 6.5W
Luminous efficacy	4680 lm - 3000K	2 x 810 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 120°
Fitting	-	-
Light color	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 7.87"	Ø 7.87"
CRI	>90	>90
Note	Extra white satin glass. Frosted glass recessed 1.97" into the ceiling.	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%).

OPTIONAL ACCESSORIES

product code	optional code	description	info
BU5271.AC	00010KIT	Kit LED dimmable	Bulb 10W · 12V

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2,7 m in height and therefore expressed in m²



Bar I Mulini - ph- G. Doppiu - Cagliari