


NOVA

ROUNDED CONCEALED RECESSED
FIXTURE, LIGHT EMISSION HOLE OF 7.87 in

Indoor Recessed



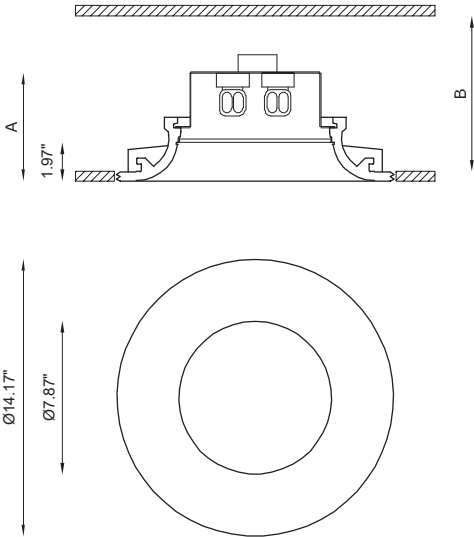

Nova



OTHER AVAILABLE CODES

BU5291.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU5291.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)
BU5293.27.AC	<i>lens</i>	120°
	<i>light color</i>	2700K

TECHNICAL FEATURES

Code	BU5291.AC	BU5293.AC
Type	Downlight 90°	Downlight 90°
		
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	96.01 ft²	96.01 ft²
Weight	14.99 lbs	12.79 lbs
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Control gear	Constant current electronic driver (included)	Dimmable constant current driver (included)
Dimensions	A: 7.87 in; B: 8.66 in	A: 6.69 in; B: 8.66 in
Cut out for plasterboard	Ø 14.57 in	Ø 14.57 in
Lamp type	LED 1050 mA	LED 500 mA
		
Lamp wattage	1 × 40W	2 × 6.5W
Luminous efficacy	1 × 4680 lm - 3000K	2 × 930 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 120°
Fitting	-	-
Light color	White 3000K	White 3000K
Light hole	Ø 7.87 in	Ø 7.87 in
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Note	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling. DALI driver on request. Other available light colors: 2700K, 4000K (on request).	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%). Other available light colors: 2700K, 4000K (on request).

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042