


The Ozon IP20 is a recessed indoor luminaire made of Calcyt® plaster with a unique rounded shape that offers a great indirect lighting solution. The Ozon range is available in 2 different sizes, 3 wattages and various static white color temperatures as well as a warm to dim version.



## TECHNICAL DATA

|                           |                                                                  |
|---------------------------|------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 6W (350mA), 6.4W (250mA), 9.5W (350mA)                           |
| <b>Power Supply</b>       | Remote, not included. See page 2.                                |
| <b>Construction</b>       | Body: Calcyt® Plaster                                            |
| <b>CCT</b>                | 2200K, 2700K, 3000K, 4000K, WarmDim                              |
| <b>CRI</b>                | >80, >90                                                         |
| <b>Optics</b>             | Fixed                                                            |
| <b>Finishes</b>           | Paintable Plaster                                                |
| <b>Cut-Out Dimensions</b> | 8.86" × 14.96"                                                   |
| <b>Fixture Dimensions</b> | 8.66" w x 2.17" l x 14.76" h                                     |
| <b>Aperature</b>          | Ø7.72"                                                           |
| <b>Color Consistency</b>  | 4-Step MacAdam (WarmDim)<br>2-Step MacAdam (9.3W, 9.6W versions) |
| <b>IP Rating</b>          | IP20                                                             |

Wall Cut-Out: 7.17" × 13.27"  
Fixture Dimensions

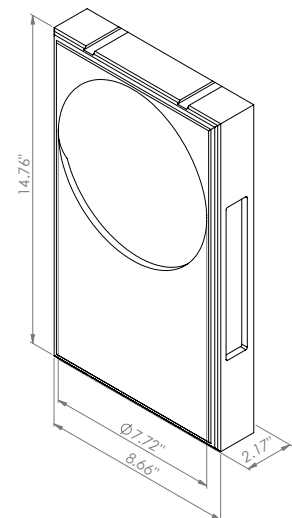

## ORDERING INFORMATION

*Example: 120 61 100. Accessories / Power Supplies ordered separately.*

| Model No.            | Description                               |
|----------------------|-------------------------------------------|
| 120 61 500 - 2200K   | 6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor  |
| 120 61 000 - 2700K   | 6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor  |
| 120 61 100 - 3000K   | 6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor  |
| 120 63 000 - 2700K   | 9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor |
| 120 63 100 - 3000K   | 9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor |
| 120 63 200 - 4000K   | 9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor |
| 120 61 600 - WarmDim | 6W, 500 lm, 350mA, CRI 80, IP20 Indoor    |

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

250mA - 6.4W version (800 lm)

| Part Number                 | Description                                        | Input/Output                       | # of Fixtures |
|-----------------------------|----------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00466-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 250mA, 10W, Class 2  | 1-1           |
| <a href="#">PPLT00290</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 250mA, 16W, Class 2  | 1-1           |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 250mA, 20W, Class 2  | 1-2           |
| <a href="#">PPLT00308-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 250mA, 30W, Class 2  | 1-2           |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 250mA, 50W, Class 2  | 1-2           |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 250mA, 100W, Class 2 | 1-4           |

350mA - 9.5W version (1500 lm), 6W version (500 lm)

| Part Number                 | Description                                        | Input/Output                       | # of Fixtures |      |
|-----------------------------|----------------------------------------------------|------------------------------------|---------------|------|
|                             |                                                    |                                    | 6W            | 9.5W |
| <a href="#">PPLT00468</a>   | Phase Dim (120V only)                              | 120-277VAC to 350mA, 14W, Class 2  | 1-2           | 1-1  |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 20W, Class 2  | 1-3           | 1-1  |
| <a href="#">PPLT00263</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 350mA, 32W, Class 2  | 2-2           | 1-1  |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 350mA, 50W, Class 2  | 1-3           | 1-1  |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 250mA, 100W, Class 2 | 1-12          | 1-8  |

Suggested Lutron Compatible - 350mA - 9.5W version (1500 lm), 6W version (500 lm)

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |      |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|------|
|                           |                |            |           |                                                |                                   | 6W            | 9.5W |
| <a href="#">PPLT00247</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 7W, Class 2  | 1-1           | -    |
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 1-2           | 1-1  |
| <a href="#">PPLT00179</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 19W, Class 2 | 1-2           | 1-1  |

*For other power supply options consult factory.***ACCESSORIES - Installation****715 01 000**

Plaster Kit - Outer Casing

Job Name/Date:

Fixture Type Designation: