

# OZON L IP20


The Ozon IP20 is a recessed indoor luminaire made of Calcyt® plaster with a unique rounded shape that offers a great indirect lighting solution. The Ozon range is available in 2 different sizes, 3 wattages and various static white color temperatures as well as a warm to dim version.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W (350mA), 6.4W (250mA), 9.5W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Calcyt® Plaster
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, WarmDim
<b>CRI</b>	>80, >90
<b>Optics</b>	Fixed
<b>Finishes</b>	Paintable Plaster
<b>Cut-Out Dimensions</b>	8.86" × 14.96"
<b>Fixture Dimensions</b>	8.66" w x 2.17" l x 14.76" h
<b>Aperature</b>	Ø7.72"
<b>Color Consistency</b>	4-Step MacAdam (WarmDim) 2-Step MacAdam (9.3W, 9.6W versions)
<b>IP Rating</b>	IP20

Wall Cut-Out: 7.17" × 13.27"  
Fixture Dimensions

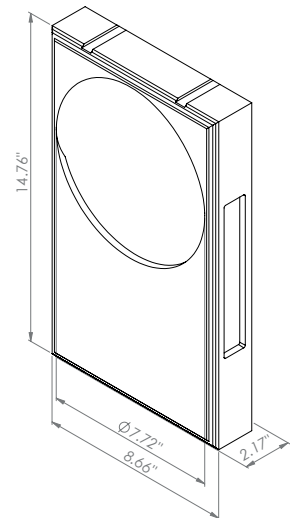

## ORDERING INFORMATION

*Example: 120 61 100. Accessories / Power Supplies ordered separately.*

--	--

Model No.	Description
120 61 500 - 2200K	6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor
120 61 000 - 2700K	6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor
120 61 100 - 3000K	6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor
120 63 000 - 2700K	9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor
120 63 100 - 3000K	9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor
120 63 200 - 4000K	9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor
120 61 600 - WarmDim	6W, 500 lm, 350mA, CRI 80, IP20 Indoor

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

250mA - 6.4W version (800 lm)

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2	1-1
<a href="#">PPLT00290</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2	1-2
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 30W, Class 2	1-2
<a href="#">PPLT00467-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-4

350mA - 9.5W version (1500 lm), 6W version (500 lm)

Part Number	Description	Input/Output	# of Fixtures	
			6W	9.5W
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120-277VAC to 350mA, 14W, Class 2	1-2	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-3	1-1
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-3	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-12	1-8

Suggested Lutron Compatible - 350mA - 9.5W version (1500 lm), 6W version (500 lm)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						6W	9.5W
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1	-
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-2	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-2	1-1

For other power supply options consult factory.

## REQUIRED ACCESSORIES - Installation

**715 01 000**

Plaster Kit - Outer Casing

Job Name/Date:

Fixture Type Designation: