


The Ozon IP20 is a recessed indoor luminaire made of Calcyt® plaster with a unique rounded shape that offers a great indirect lighting solution. The Ozon range is available in 2 different sizes, 3 wattages and various static white color temperatures as well as a warm to dim version.



TECHNICAL DATA

Wattage / Input	6W (350mA), 6.4W (250mA), 9.5W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Calcyt® Plaster
CCT	2200K, 2700K, 3000K, 4000K, WarmDim
CRI	>80, >90
Optics	Fixed
Finishes	Paintable Plaster
Cut-Out Dimensions	7.17" x 13.27"
Fixture Dimensions	6.97" w x 2.17" l x 13.07" h
Aperature	Ø6.02"
Color Consistency	4-Step MacAdam (WarmDim) 2-Steo MacAdam (9.3W, 9.6W versions)
IP Rating	IP20

Wall Cut-Out: 7.17" x 13.27"
Fixture Dimensions

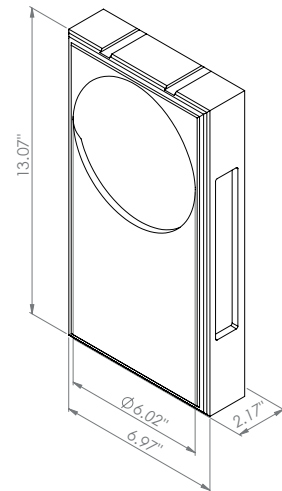

ORDERING INFORMATION

Example: 119 29 100. Accessories / Power Supplies ordered separately.

--

Model No.	Description
119 29 500 - 2200K	6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor
119 29 000 - 2700K	6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor
119 29 100 - 3000K	6.4W, 800 lm, 250mA, CRI 90, IP20 Indoor
119 27 000 - 2700K	9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor
119 27 100 - 3000K	9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor
119 27 200 - 4000K	9.5W, 1500 lm, 350mA, CRI 80, IP20 Indoor
119 61 600 - WarmDim	6W, 500 lm, 350mA, CRI 80, IP20 Indoor

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

250mA - 6.4W version (800 lm)

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2	1-1
PPLT00290	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2	1-2
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 30W, Class 2	1-2
PPLT00467-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2	1-2
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-4

350mA - 9.5W version (1500 lm) , 6W version (500 lm)

Part Number	Description	Input/Output	# of Fixtures	
			6W	9.5W
PPLT00468	Phase Dim (120V only)	120-277VAC to 350mA, 14W, Class 2	1-2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-3	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2	1-1
PPLT00467-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-3	1-1
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-12	1-8

Suggested Lutron Compatible - 350mA - 9.5W version (1500 lm), 6W version (500 lm)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						6W	9.5W
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1	-
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-2	1-1

For other power supply options consult factory.

REQUIRED ACCESSORIES - Installation

703 01 000

Plaster Kit - Outer Casing

Job Name/Date:

Fixture Type Designation: