



# OZON M IP20


INDOOR

Fix (not adjustable) 0° - 0°

7.17" × 13.27"

Material : CALCYT® plaster

The Ozon line extends the range of recessed wall light fixtures with a refreshing round shape. The organic shape and the curved back create a great indirect lighting solution that is equipped with state of the art LED solution. The Ozon range is available in 2 different sizes in order to suit your requirements.

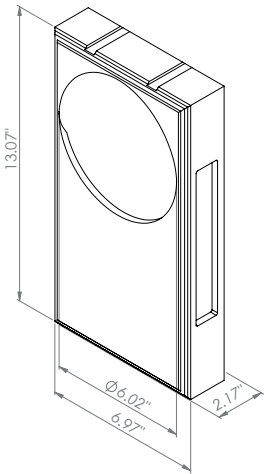

Ready for installation in solid walls  
Optional plasterkit for installation into gypsum walls

## PLASTERKIT OZON M

REF N° 703 01 000 For mounting into gypsum walls

### OZON M LED WARMDIM 500LM REMOTE

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 119 61 600 DIM 0-10V

350mA - 6W - Requires remote driver  
4-Step MacAdam - CRI 80

### OZON M LED 800LM REMOTE

| REF N°    | 2200°K     | 2700°K     | 3000°K     |
|-----------|------------|------------|------------|
| DIM 0-10V | 119 29 500 | 119 29 000 | 119 29 100 |
|           |            |            |            |
|           |            |            |            |

250mA - 6.4W - Requires remote driver  
2-Step MacAdam - CRI 90 - R9=75

### OZON M LED 1500LM REMOTE

| REF N°    | 2700°K     | 3000°K     | 4000°K     |
|-----------|------------|------------|------------|
| DIM 0-10V | 119 27 000 | 119 27 100 | 119 27 200 |
|           |            |            |            |
|           |            |            |            |

350mA - 9.5W - Requires remote driver  
2-Step MacAdam - CRI 80



# OZON L IP20


INDOOR

Fix (not adjustable) 0° - 0°

8.86" × 14.96"

Material : CALCYT® plaster

The Ozon line extends the range of recessed wall light fixtures with refreshing round shape. The organic shape and the curved back create a great indirect lighting solution that is equipped with state of the art LED solutions. The Ozon range is available in 2 different sizes in order to suit your requirements.

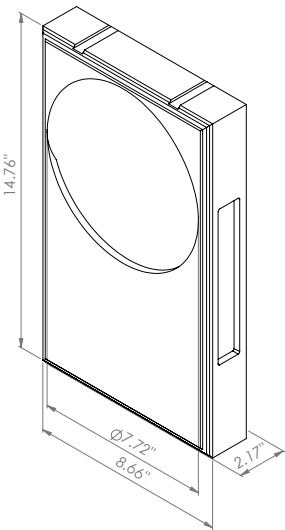

Ready for installation in solid walls  
Optional plasterkit for installation into gypsum walls

## PLASTERKIT OZON L

REF N° 715 01 000 For mounting into gypsum walls

### OZON L LED WARMDIM 500LM REMOTE

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 120 61 600 DIM 0-10V

350mA/50Hz - 6W - requires remote driver  
parallel wiring  $\text{C-0.2m} \text{E}$  -  
4-Step MacAdam - CRI 80

### OZON L LED 800LM REMOTE

| REF N°    | 2200°K     | 2700°K     | 3000°K     |
|-----------|------------|------------|------------|
| DIM 0-10V | 120 61 500 | 120 61 000 | 120 61 100 |
|           |            |            |            |
|           |            |            |            |

250mA/50Hz - 6.4W - requires remote  
driver parallel wiring  $\text{C-0.2m} \text{E}$  -  
2-Step MacAdam - CRI 90 - R9=75

### OZON L LED 1500LM REMOTE

| REF N°    | 2700°K     | 3000°K     | 4000°K     |
|-----------|------------|------------|------------|
| DIM 0-10V | 120 63 000 | 120 63 100 | 120 63 200 |
|           |            |            |            |
|           |            |            |            |

350mA/50Hz - 9.5W - requires remote  
driver parallel wiring  $\text{C-0.2m} \text{E}$  -  
2-Step MacAdam - CRI 80

