

PASITO MINI 1.0



The Pasito and Pasito Mini series are small yet powerful steplights suitable for indoor/outdoor applications. Pasito Mini 1.0 is the recessed, flush to the wall version and is available in 80 or >90 CRI, 2 optic options.

TECHNICAL DATA

Wattage / Input	5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Alloy EN AW 6060 Cable Length: 0.98'
CCT	2700K, 3000K, 4000K
CRI	80, >90
BUG Rating	B0-U1-G0 (3000K, Anthracite, Corten) B0-U2-G0 (3000K, White, Gray)
Delivered Lumens	214 lm (3000K, 150°x90°, CRI 80)
Efficacy	42.8 lm/W (3000K, 150°x90°, CRI 80)
Optics	2 Standard (see below)
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Cut-Out Dimensions	6.50" h x 3.39" w
Fixture Dimensions	6.34" h x 3.31" w x 2.64" d
Fixture Weight	0.77 lbs
LED Source	1 High Intensity Power LED
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP65
Impact Rating	IK05



Cut-Out Dimensions: 6.50" h x 3.39" w
Fixture Dimensions



Recessed, Flush

ORDERING INFORMATION

Example: PM10001000F0BH. Accessories / Power Supplies ordered separately.

PM1000				
Model No.	CRI	CCT	Optics	Finish
PM1000	0 - CRI 80 1 - CRI >90	000F - 2700K 0005 - 3000K 0009 - 4000K	0A - Asymmetric 150° x 90° 0B - 60°	E - White F - Grey H - Anthracite T - Cor-ten C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-16
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-16

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-15


DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-15


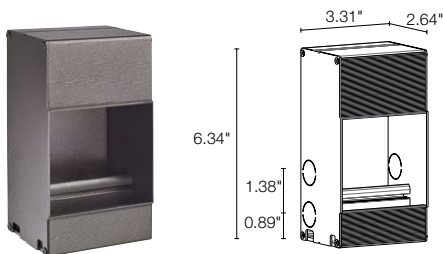
*For other power supply options consult factory.***ACCESSORIES****Installation****Outer Casing - Required for installation****WCA00E** - White**WCA00F** - Grey**WCA00H** - Anthracite**WCA00T** - Cor-ten*Job Name/Date:**Fixture Type Designation:*

PHOTOMETRIC DATA

Note all Photometry is CRI 80, 3000K


A - Asymmetrical 150°x90°

B - 60°



A - Asymmetrical


Isofc (3000K)

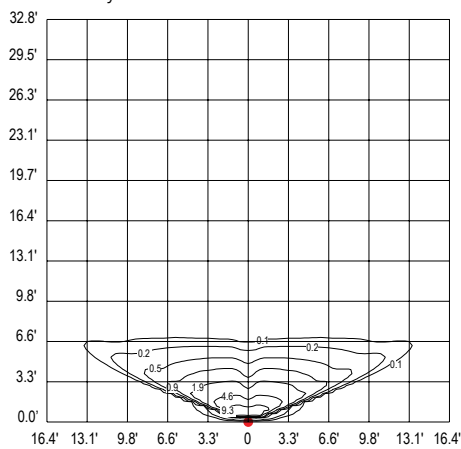

h 19.7'

A - Asymmetrical


Isofc (3000K)

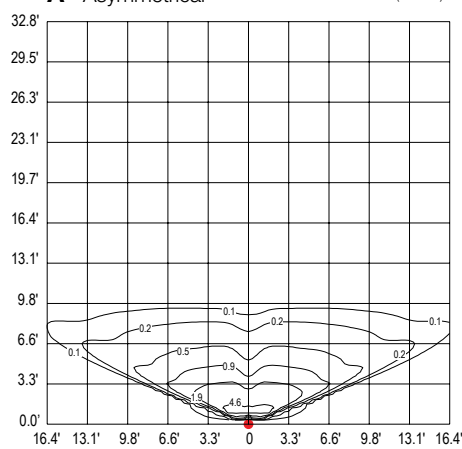

h 31.5'

B - 60°


Isofc (3000K)

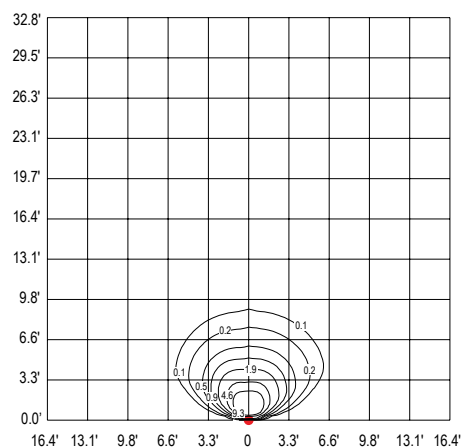

h 19.7'

B - 60°

Isofc (3000K)

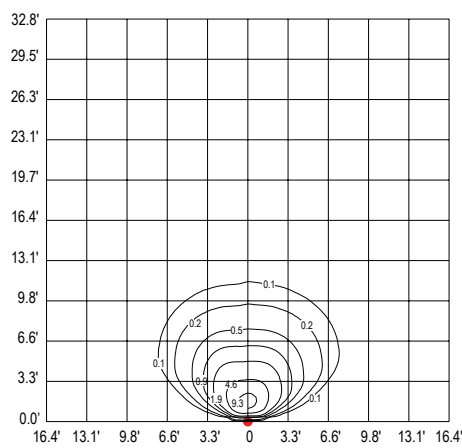

h 31.5'

Job Name/Date:

Fixture Type Designation: