



# PASITO MINI 1.1

The Pasito and Pasito Mini series are small yet powerful steplights suitable for indoor/outdoor applications. Pasito Mini 1.1 is the recessed, with a frame version and is available in 80 or >90 CRI, 2 optic options.



Fixture Dimensions



Recessed, With Frame

## TECHNICAL DATA

<b>Wattage / Input</b>	5W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Technopolymer, aluminum alloy EN AW 6060 Cable Length: 0.98'
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	80, >90
<b>Delivered Lumens</b>	214 lm (3000K, 150°x90°, CRI 80)
<b>Efficacy</b>	42.8 lm/W (3000K, 150°x90°, CRI 80)
<b>Optics</b>	2 Standard (see below)
<b>Finishes</b>	4 Standard, Custom RAL (see below)
<b>Cut-Out Dimensions</b>	4.92" h x 3.35" w
<b>Fixture Dimensions</b>	5.63" h x 3.90" w x 1.73" d
<b>Fixture Weight</b>	0.66 lbs
<b>LED Source</b>	1 High Intensity Power LED
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK06

## ORDERING INFORMATION

Example: **PM11001FBH**. Accessories / Power Supplies ordered separately.

<b>PM1100</b>				
<b>Model No.</b>	<b>CRI</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
<b>PM1100</b>	0 - CRI 80 1 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K	A - Asymmetric 150° x 90° B - 60°	E - White F - Grey H - Anthracite T - Cor-ten C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-4
<a href="#">PPLT00599</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-15
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-16
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-16

For other power supply options consult factory.

## ACCESSORIES

### Installation



#### WC1420

Outer Casing


Job Name/Date:

Fixture Type Designation:



## PHOTOMETRIC DATA

Note all Photometry is CRI 80, 3000K



### A - Asymmetrical 150° x 90°

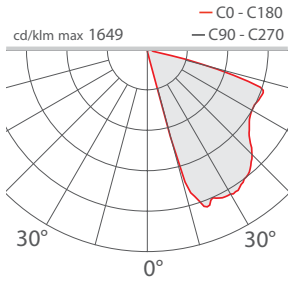


### A - Asymmetrical 150° x 90° fc (3000K) mounting height 19.69"

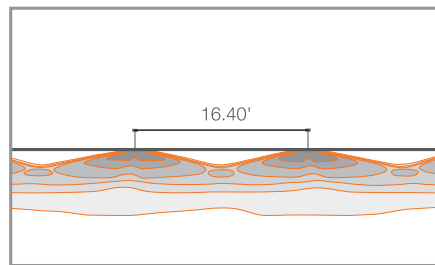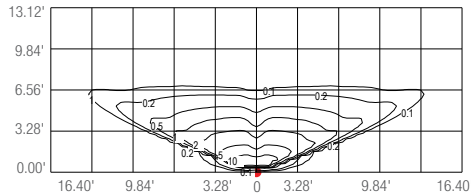



### A - Asymmetrical 150° x 90° fc (3000K) mounting height 31.50"

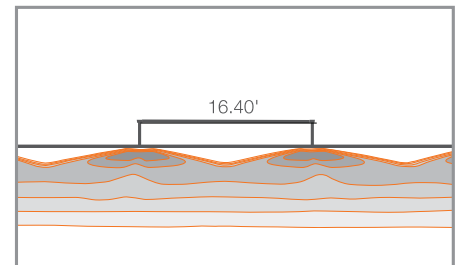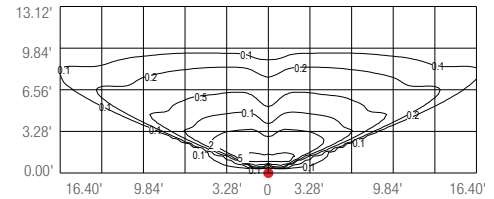



### B - 60°



### B - 60° fc (3000K) mounting height 19.50"

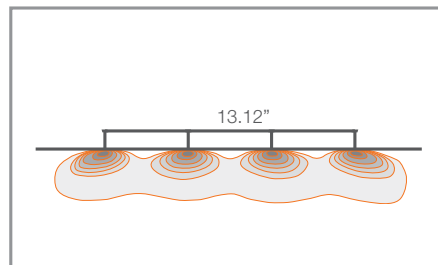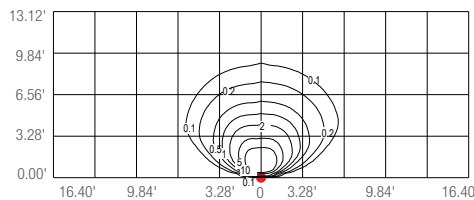

### B - 60° fc (3000K) mounting height 31.50"

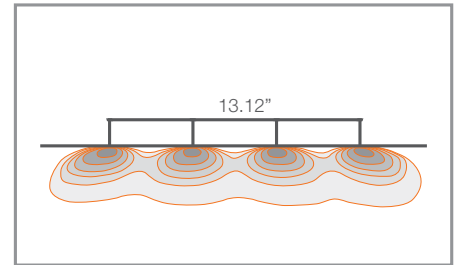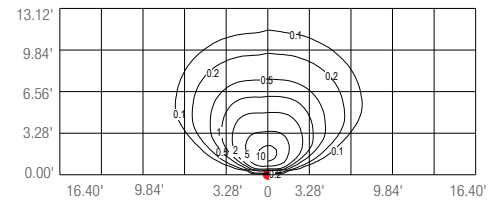

Job Name/Date:

Fixture Type Designation: