

# PASITO MINI 1.2


The Pasito and Pasito Mini series are small yet powerful steplights suitable for indoor/outdoor applications. Pasito Mini 1.2 is the surface mounted version and is available in 80 or >90 CRI, 2 optic options.

## TECHNICAL DATA

|                    |                                                                        |
|--------------------|------------------------------------------------------------------------|
| Wattage / Input    | 5W (24VDC)                                                             |
| Power Supply       | Remote, not included. See page 2.                                      |
| Construction       | Body: Technopolymer, Aluminum alloy EN AW 6060<br>Cable Length: 0.98'  |
| CCT                | 2700K, 3000K, 4000K                                                    |
| CRI                | 80, >90                                                                |
| BUG Rating         | B0-U2-G0 (3000K, White, Gray)<br>B0-U1-G0 (3000K, Anthracite, Cor-ten) |
| Delivered Lumens   | 214 lm (3000K, 150°x90°, CRI 80)                                       |
| Efficacy           | 42.8 lm/W (3000K, 150°x90°, CRI 80)                                    |
| Optics             | 2 Standard (see below)                                                 |
| Finishes           | 4 Standard, Custom RAL (see below)<br>(4 Stage Marine Grade Finish)    |
| Cut-Out Dimensions | Surface Mounted                                                        |
| Fixture Dimensions | 5.63" h x 3.90" w x 1.81" d                                            |
| Fixture Weight     | 0.88 lbs                                                               |
| LED Source         | 1 High Intensity Power LED                                             |
| Lumen Maintenance  | L90, B10 >50,000hrs (Ta 25°C)                                          |
| Color Consistency  | 1/4 ANSI BIN                                                           |
| Operating Temp.    | -4°F to +113°F                                                         |
| IP Rating          | IP65                                                                   |
| Impact Rating      | IK06                                                                   |



Fixture Dimensions

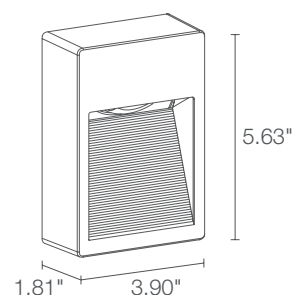

Surface Mounted

## ORDERING INFORMATION

Example: PM12001FBH. Power Supplies ordered separately.

| PM1200    |                          |                                     |                                      |                                                                                                       |
|-----------|--------------------------|-------------------------------------|--------------------------------------|-------------------------------------------------------------------------------------------------------|
| Model No. | CRI                      | CCT                                 | Optics                               | Finish                                                                                                |
| PM1200    | 0 - CRI 80<br>1 - CRI 90 | F - 2700K<br>5 - 3000K<br>9 - 4000K | A - Asymmetric 150° x 90°<br>B - 60° | E - White<br>F - Grey<br>H - Anthracite<br>T - Cor-ten<br>C - Custom RAL<br>(Consult factory for "C") |

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

24VDC

| Part Number               | Description                                             | Input/Output                             | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------------|---------------|
| <a href="#">PPLT00284</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 100W, Class 2, DAMP | 1-16          |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2       | 2-16          |

Suggested Lutron Compatible

| Part Number               | Option       | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |
|---------------------------|--------------|------------|-----------|-----------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3DAE / L3D0 | L3DA/L3D0  | 100%-1%   | Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-15          |

**DRIVERS IN NEMA ENCLOSURE**

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-15          |

*For other power supply options consult factory.*


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA



Note all Photometry is CRI 80, 3000K

### A - Asymmetrical 150° x 90°





### A - Asymmetrical 150° x 90° mounting height 19.69"

fc (3000K)

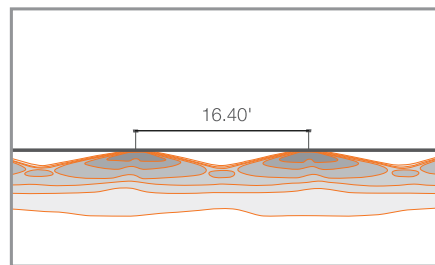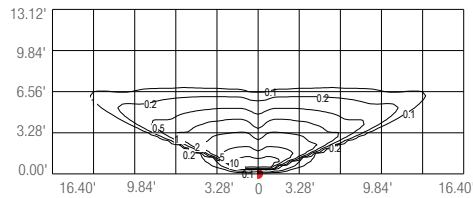


### A - Asymmetrical 150° x 90° mounting height 31.50"

fc (3000K)

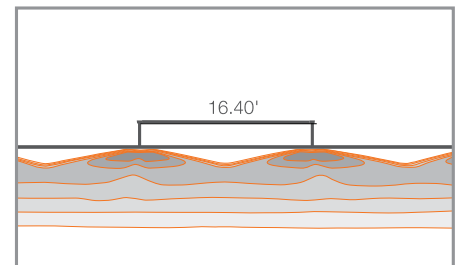
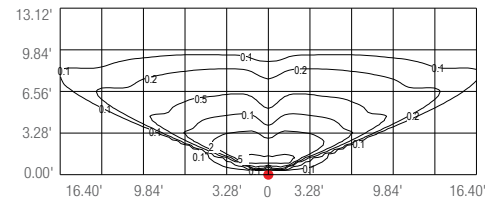


### B - 60°





### B - 60° mounting height 19.50"

fc (3000K)

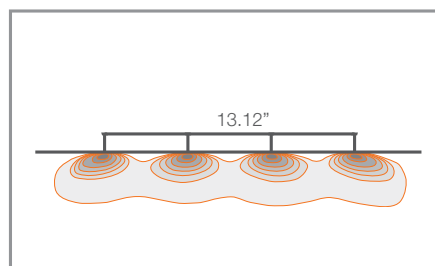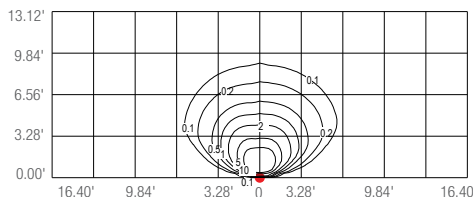

### B - 60° mounting height 31.50"

fc (3000K)

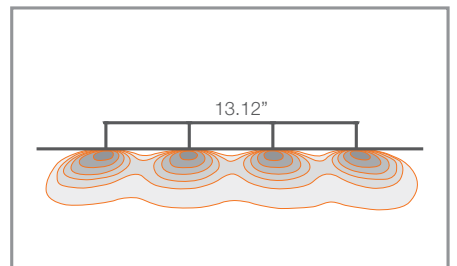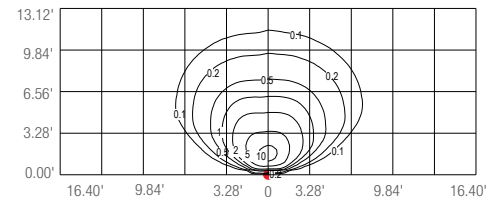

Job Name/Date:

Fixture Type Designation: