



# PASITO 1.2

The Pasito 1.2 is a small yet powerful surface mount steplight suitable for indoor/outdoor applications. Pasito 1.2 is the surface mounted version and is available in 80 or >90 CRI and 2 optic options.



Wall Cut-Out: 5.63" l x 6.34" h  
Fixture Dimensions

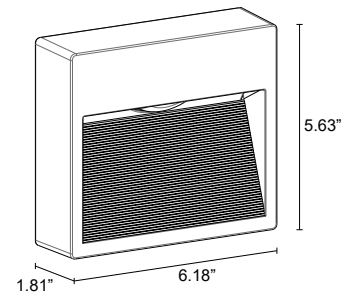

Surface Mounted

## TECHNICAL DATA

<b>Wattage / Input</b>	8.5W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Technopolymer, Aluminium Alloy EN AW 6060 Cable Length: 0.98'
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80, 90
<b>Delivered Lumens</b>	364 lm (3000K, 150°x90°, CRI 80)
<b>Efficacy</b>	42.8 lm/W (3000K, 150°x90°, CRI 80)
<b>Optics</b>	2 Standard (see below)
<b>Finishes</b>	4 Standard, Custom RAL (see below)
<b>Cut-Out Dimensions</b>	N/A
<b>Fixture Dimensions</b>	6.18" l x 1.81" w x 5.63" h
<b>Fixture Weight</b>	1.32 lbs
<b>LED Source</b>	1 High Intensity Power LED
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK06

## ORDERING INFORMATION

Example: PA12001FBH. Accessories / Power Supplies ordered separately.

PA120	0				
Model No.	Wattage	CRI	CCT	Optics	Finish
PA120	0 - 8.5W	0 - CRI 80 1 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K	A - Asymmetric 150° x 90° B - 60°	E - White F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-2
<a href="#">PPLT00627</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-9
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-9
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-9

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:



## PHOTOMETRIC DATA

Note all Photometry is CRI 80, 3000K



### A - Asymmetrical 150° x 90°




A - Asymmetrical 150°x90° fc (3000K)  
mounting height 19.69"

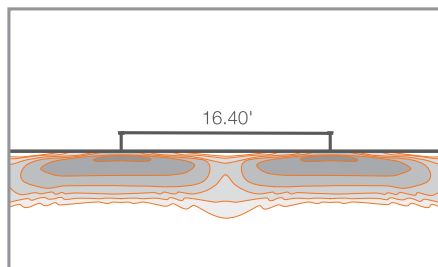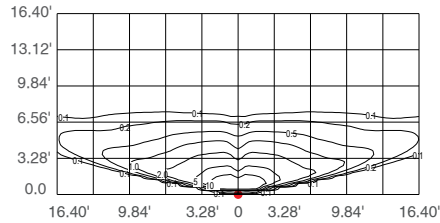



A - Asymmetrical 150°x90° fc (3000K)  
mounting height 31.50"

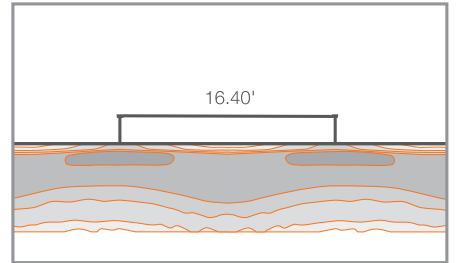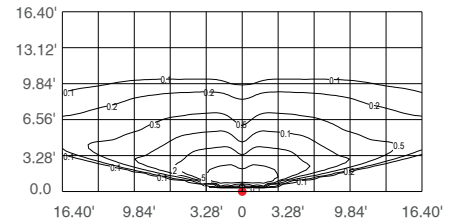



### B - 60°



B - 60° fc (3000K)  
mounting height 19.69"

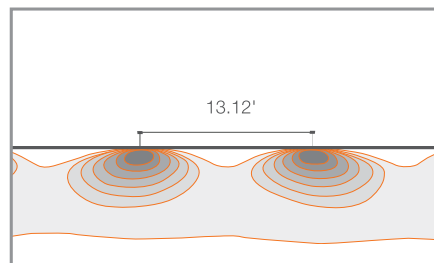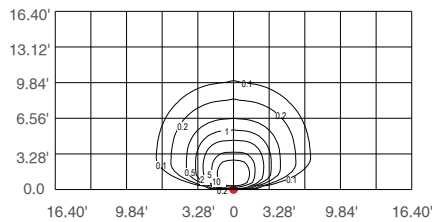

B - 60° fc (3000K)  
mounting height 31.50"

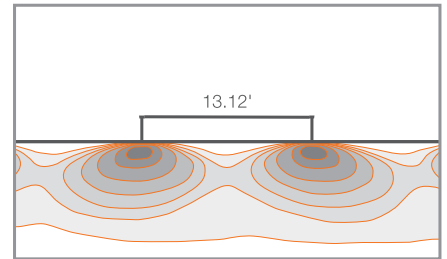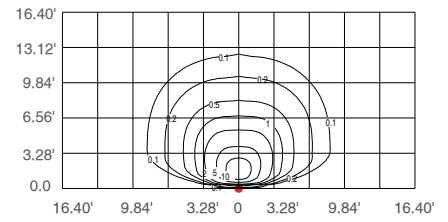

Job Name/Date:

Fixture Type Designation: