

OUTDOOR STEP LIGHTS WIDE SPACING BETWEEN FIXTURES ON PATHS



wide



asymmetrical



2700K 3000K 4000K

5W 24VDC

8.5W 24VDC

RECESSED, FLUSH



PASITO MINI 1.0



PASITO 1.0

RECESSED, WITH FRAME



PASITO MINI 1.1



PASITO 1.1

SURFACE MOUNTED



PASITO MINI 1.2



PASITO 1.2

RECESSED
INSTALLATION,
FLUSH: PASITO
DISAPPEARS
INTO THE WALL,
LEAVING ONLY
ITS LIGHT
OUTPUT VISIBLE



RECESSED
INSTALLATION, WITH
FRAME; SURFACE
INSTALLATION



IP65
SUITABLE FOR OUTDOOR APPLICATIONS



BUILT-IN PROTECTION SYSTEMS:
IPS
INTELLIGENT PROTECTION SYSTEM



IK05 PASITO MINI 1.0



IK06 PASITO MINI 1.1/1.2
PASITO 1.1/1.2



IK07 PASITO 1.0



6-STEP MATERIAL PROTECTION, AND
OXIDATION AND CORROSION RESISTANCE

Low-copper-content anticorrosive aluminum alloy 6060 Preparation
for painting
Epoxy paint
Polyester paint
Paints compliant with Qualicoat automotive coating standard
Salt spray tested (over 1500 hours)

BODY IN LOW-COPPER-CONTENT ANTICORRODAL 6060
ALUMINUM FOR EXCELLENT RESISTANCE TO CORROSION
AND BETTER HEAT DISSIPATION. (PASITO MINI 1.0 AND PASITO 1.0)
BODY IN TECHNOLOGY POLYMER FOR HIGH RESISTANCE
TO IMPACT, SUB-ZERO TEMPERATURES AND HARSH
CONDITIONS SUCH AS SALINE ENVIRONMENTS
(PASITO MINI 1.1 / 1.2 AND PASITO 1.1 / 1.2)

PASITO MINI 1.1 / PASITO 1.1

INSTALLED ON PLASTERBOARD USING THE SPRINGS PROVIDED,
WITHOUT THE NEED FOR AN OUTER CASING



THE CONTROLLED DOWNWARD
BEAM REDUCES LIGHT
SPILL TO A MINIMUM



UNIQUE SELLING POINTS



RAL FINISH
ON REQUEST



ANTHRACITE



WHITE



CORTEN




GREY



THE 150°X90° ASYMMETRICAL OPTICS MEAN THE FIXTURES CAN BE POSITIONED 16.4' (5 m) APART: THIS REDUCES THE NUMBER OF STEP LIGHTS NEEDED TO GUARANTEE LIGHT UNIFORMITY ON LONG PATHWAYS. INSTALLATION HEIGHT 31.5".

- ✓ PASITO MINI 1.0
recessed installation, flush
- PASITO MINI 1.1
recessed installation, with frame
- PASITO MINI 1.2
surface installation

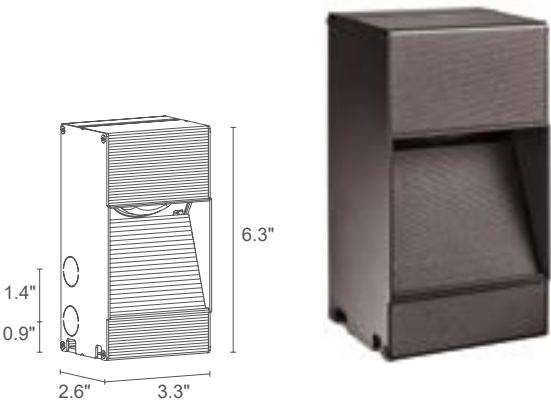

PASITO MINI 1.0

Required outer casing, not included



 0.66 lbs (24VDC)  IP65  IK05




POWER / MODEL CODE


5W 24VDC	
PM1000	000 0 E White
PM1000	000 0 F Grey
PM1000	000 0 H Anthracite
PM1000	000 0 T Cor-ten

CRI	0 - CRI 80 1 - CRI >90
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	A - asymmetrical, 150°x90° B - 60°

LUMEN OUTPUT AT SOURCE	383 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	214 lm (3000K, 150°x90°, CRI 80, white finish)
NO. AND TYPE OF LED	1 high-intensity power LED 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anticorodal aluminum
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 0.98' neoprene cable H05RN-F 2x0.35/0.75 Ø0.25"
MOUNTING	recessed, flush (wall)
ACCESSORIES	see accessories page
PHOTOMETRIC DATA	see photometrics page

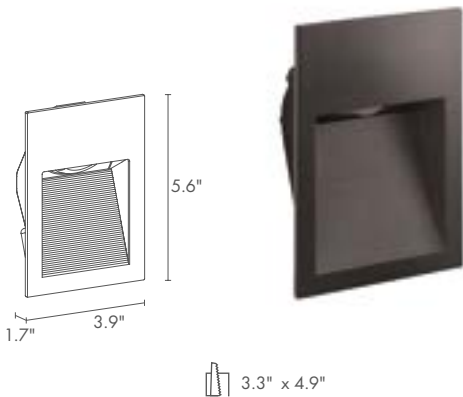

3.3" x 4.9"

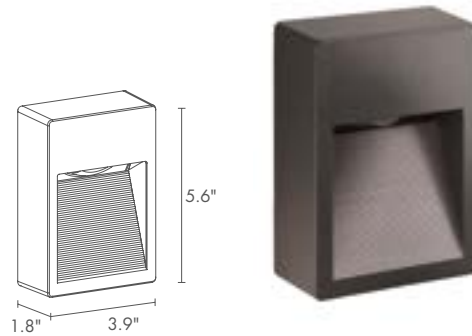

PASITO MINI 1.1

CB **ERC** **LED**

0.7 lbs IP65 IK06

IPS **CASAMBI**

5W 24VDC

PM1100 **E** White
PM1100 **F** Grey
PM1100 **H** Anthracite
PM1100 **T** Cor-ten

PASITO MINI 1.2

ERC **LED**

0.9 lbs IP65 IK06

IPS **CASAMBI**

5W 24VDC

PM1200 **E** White
PM1200 **F** Grey
PM1200 **H** Anthracite
PM1200 **T** Cor-ten

0 - CRI 80
1 - CRI >90
F - 2700K
5 - 3000K
9 - 4000K
A - asymmetrical, 150°x90°
B - 60°

0 - CRI 80
1 - CRI >90
F - 2700K
5 - 3000K
9 - 4000K
A - asymmetrical, 150°x90°
B - 60°

383 lm (3000K, CRI 80)

214 lm (3000K, 150°x90°, CRI 80, white finish)

1 high-intensity power LED
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in technopolymer and aluminum

Remote power supply required, not included

24VDC: includes 1.0' neoprene cable
 H05RN-F 2x0.35/0.75 Ø0.2"

recessed, with frame (wall)

see accessories page

see photometrics page

383 lm (3000K, CRI 80)

214 lm (3000K, 150°x90°, CRI 80, white finish)

1 high-intensity power LED
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in technopolymer and aluminum

Remote power supply required, not included

24VDC: includes 1.0' neoprene cable
 H05RN-F 2x0.35/0.75 Ø0.2"



surface mounted (wall)

none

see photometrics page



- ✓ **PASITO 1.0**
recessed installation, flush
- PASITO 1.1**
recessed installation, with frame
- PASITO 1.2**
surface installation

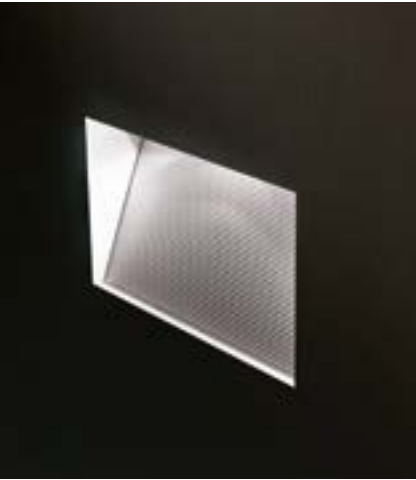

PASITO 1.0



Required outer casing, not included

1.1 lbs
 IP65
 IK07

POWER / MODEL CODE		8.5W 24VDC
PA1000	E	White
PA1000	F	Grey
PA1000	H	Anthracite
PA1000	T	Cor-ten

CRI	0 - CRI 80 1 - CRI >90
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	A - asymmetrical, 150°x90° B - 60°

LUMEN OUTPUT AT SOURCE	851 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	390 lm (3000K, 150°x90°, CRI 80, white finish)
NO. AND TYPE OF LED	1 high-intensity power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anticorodal aluminum
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	24VDC: includes 1.0' neoprene cable H05RN-F 2x0.35/0.75 Ø0.2"
MOUNTING	recessed, flush (wall)
ACCESSORIES	see accessories page
PHOTOMETRIC DATA	see photometrics page

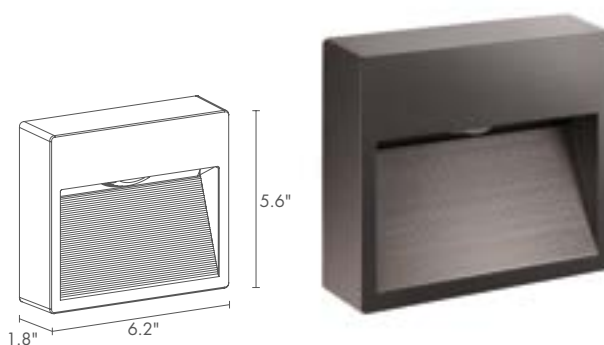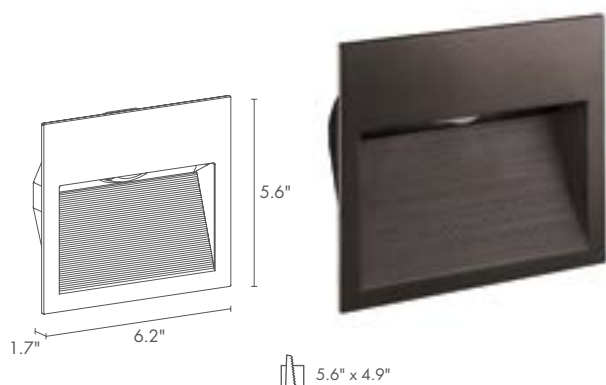


PASITO 1.1



6W 24VDC

PA1100 **E** White
PA1100 **F** Grey
PA1100 **H** Anthracite
PA1100 **T** Cor-ten

PASITO 1.2



6W 24VDC

PA1200 **E** White
PA1200 **F** Grey
PA1200 **H** Anthracite
PA1200 **T** Cor-ten

	0 - CRI 80 1 - CRI >90
	F - 2700K 5 - 3000K 9 - 4000K
	A - asymmetrical, 150°x90° B - 60°

	0 - CRI 80 1 - CRI >90
	F - 2700K 5 - 3000K 9 - 4000K
	A - asymmetrical, 150°x90° B - 60°

851 lm (3000K, CRI 80)

364 lm (3000K, 150°x90°, CRI 80, white finish)

1 high-intensity power LED
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in technopolymer and aluminum

Remote power supply required, not included

24VDC: includes 1.0' neoprene cable
H05RN-F 2x0.35/0.75 Ø0.2"

recessed, with frame (wall)

see accessories page

see photometrics page

851 lm (3000K, CRI 80)

364 lm (3000K, 150°x90°, CRI 80, white finish)

1 high-intensity power LED
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in technopolymer and aluminum

Remote power supply required, not included

24VDC: includes 1.0' neoprene cable
H05RN-F 2x0.35/0.75 Ø0.2"

surface mounted (wall)

none


see photometrics page




POSITIONING DIAGRAMS

PASITO MINI 1.0 / 1.1 / 1.2


A - Asymmetrical 150°x90°

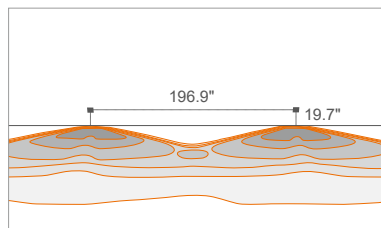


B - 60°

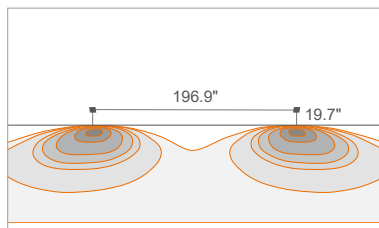

A - Asymmetrical 150°x90°

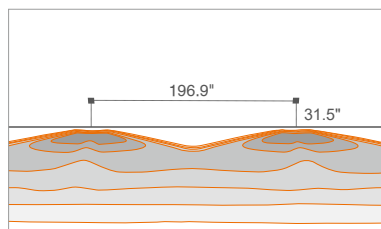


B - 60°

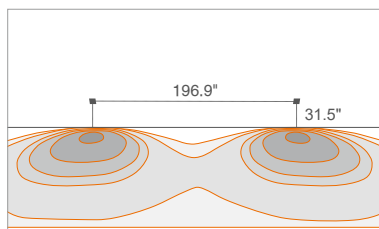


PASITO 1.0 / 1.1 / 1.2


A - Asymmetrical 150°x90°

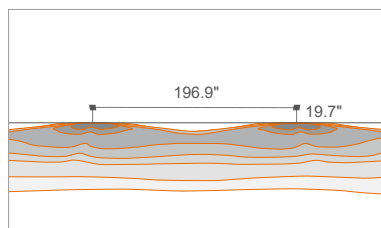


B - 60°

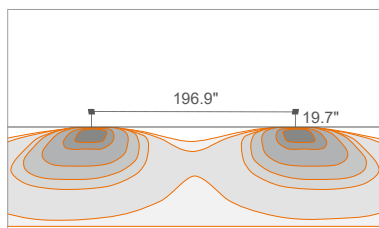

A - Asymmetrical 150°x90°

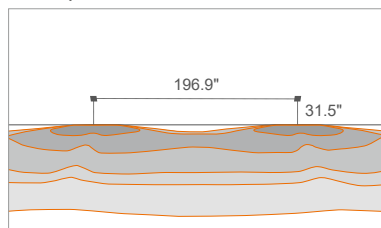


B - 60°

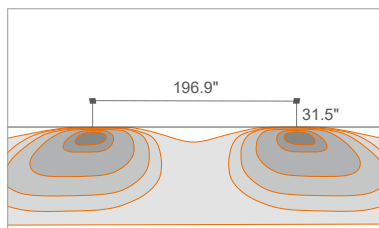

ACCESSORIES AND POSITIONING DIAGRAMMS

ACCESSORIES FOR INSTALLATION




WC1420

Outer casing for solid walls
(Pasito Mini 1.1)



WC1430

Outer casing for solid walls
(Pasito 1.1)



WCA00E - White


WCA00F - Grey

WCA00H - Anthracite

WCA00T - Corten

Outer casing

(Pasito Mini 1.0)



WC1410E - White

WC1410F - Grey

WC1410H - Anthracite

WC1410T - Corten

Outer casing


(Pasito 1.0)

PASITO MINI 1.0

1.1
1.2


A - Asymmetrical 150°x90° CRI 80

FC (3000K)

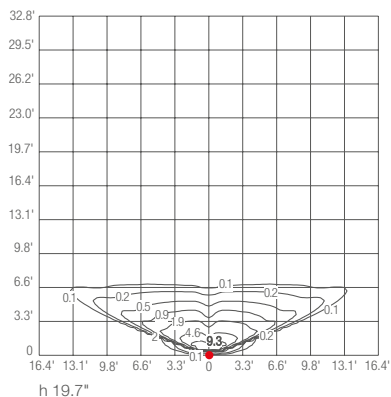


B - 60° CRI 80

FC (3000K)

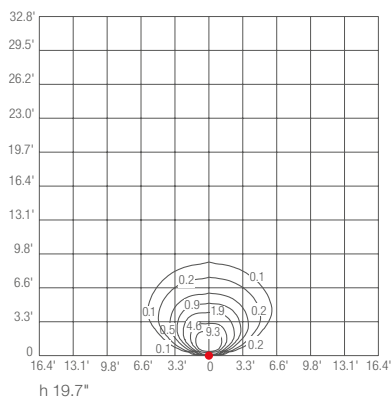


A - Asymmetrical 150°x90° CRI 80

FC (3000K)

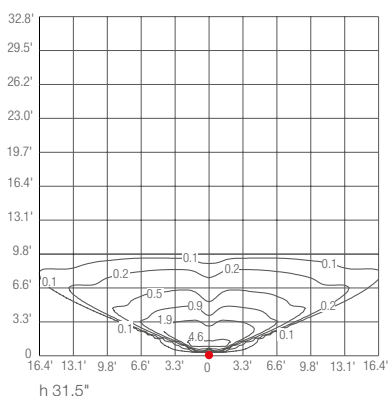

B - 60° CRI 80


FC (3000K)

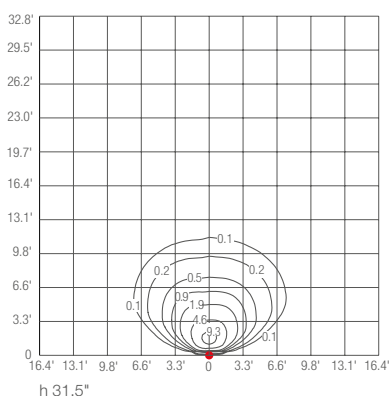

PASITO 1.0


A - Asymmetrical 150°x90° CRI 80

FC (3000K)

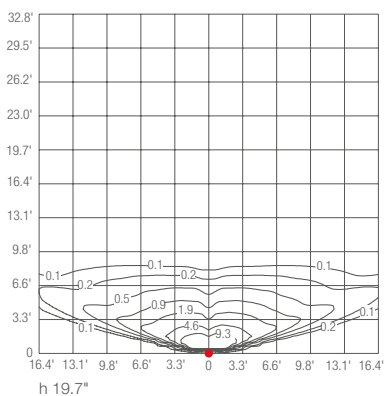

B - 60° CRI 80


Isolux (3000K)

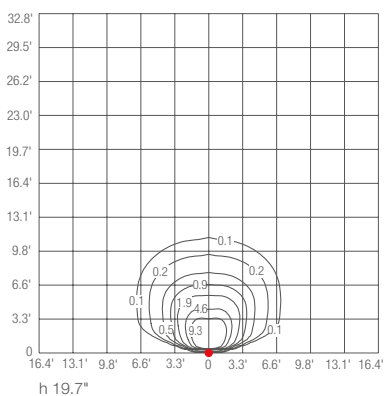

PASITO 1.0

A - Asymmetrical 150°x90° CRI 80


FC (3000K)

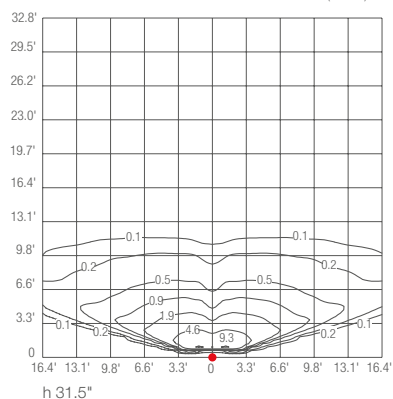

h 31.5"

B - 60° CRI 80

FC (3000K)

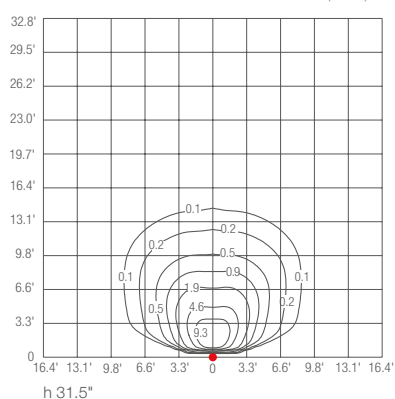


h 31.5"

PASITO 1.1 1.2

A - Asymmetrical 150°x90° CRI 80


FC (3000K)

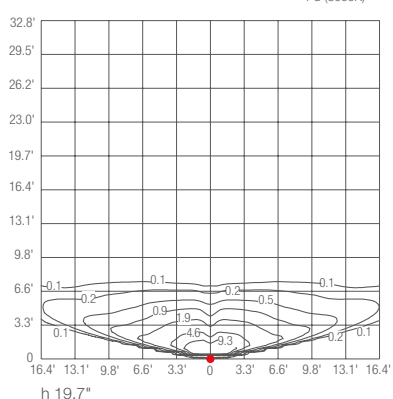

h 19.7"

B - 60° CRI 80


FC (3000K)

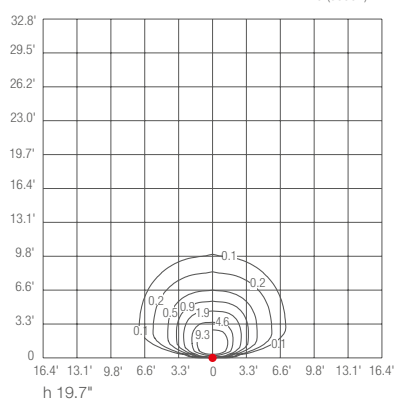

h 19.7"

A - Asymmetrical 150°x90° CRI 80


FC (3000K)

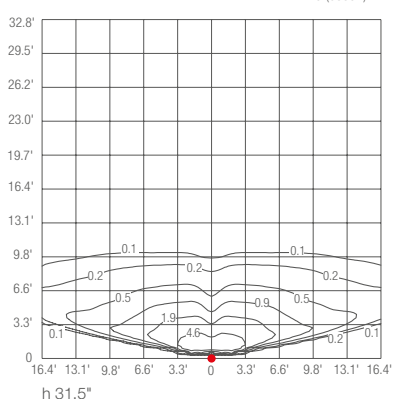

h 31.5"

B - 60° CRI 80

FC (3000K)

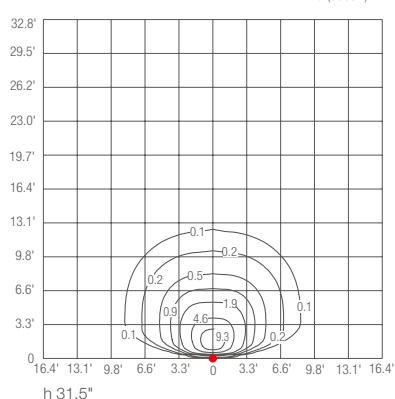

h 31.5"