


PERISCOPE 01


The Periscope series are L-shaped outdoor bollards available in three different heights with asymmetric optics and 3 standard finishes. Offered with 120VAC - 0-10V Dimming or 120-277VAC - ON/OFF. Dark Sky compliant for output below 80°.

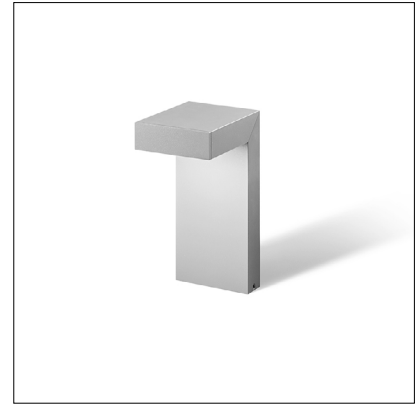

TECHNICAL DATA

Wattage	7W, 14W
Power Supply	Integral 120VAC (0-10V Dimming) or Integral 120-277VAC (ON/OFF)
Construction	Body: High Corrosion Resistance, Extruded Copper-free Aluminum Lens: Tempered Safety Glass Gasket: Silicone Screws: Stainless Steel
CCT	3000K, 4000K
Delivered Lumens	805 lm (3000K, 7W) 1610 lm (3000K, 14W) Dark Sky compliant, output below 80°
Efficacy	115 lm/W (3000K, 7W) 115 lm/W (3000K, 14W)
Optics	Asymmetric
Finishes	Textured Gray, Anthracite Gray, Matte Black
Fixture Dimensions	5.51" l x 7.09" w x 11.81" h
Fixture Weight	7.72 lbs
LED Source	4 CREE "XP-G2" LED (7W) 8 CREE "XP-G2" LED (14W)
IP Rating	IP65
Impact Rating	IK10

Fixture Dimensions



ORDERING INFORMATION


Example: 601601P-30K-ASM-AG-A.

	-		-	ASM	-		
Model No.		CCT		Optics		Finish	Dimming
601601P - 7W		30K - 3000K		ASM - Asymmetric		TG - Textured Gray	A - 0-10V (120VAC)
601602P - 14W		40K - 4000K				AG - Anthracite Gray	B - ON/OFF (120-277VAC)
						MB - Matte Black	

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation




AM-00011
Anchor Base

PHOTOMETRIC DATA

7W

Maximum Candela = 308.1

— C0 - C180
— C90 - C270

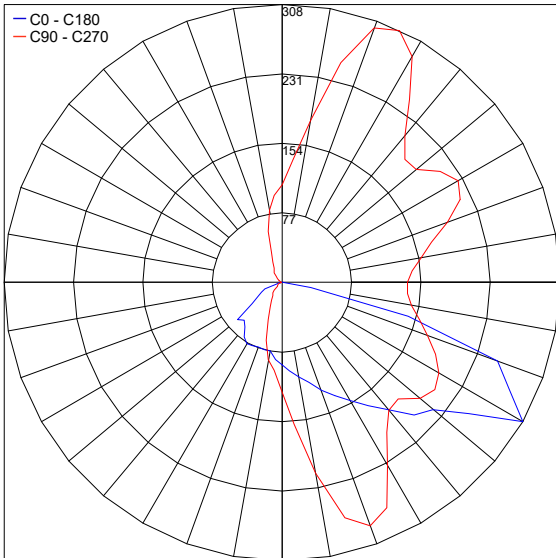


PHOTOMETRIC FILENAME : PERISCOPE 01 7W 601601.IES

14W

Maximum Candela = 648.9

— C0 - C180
— C90 - C270

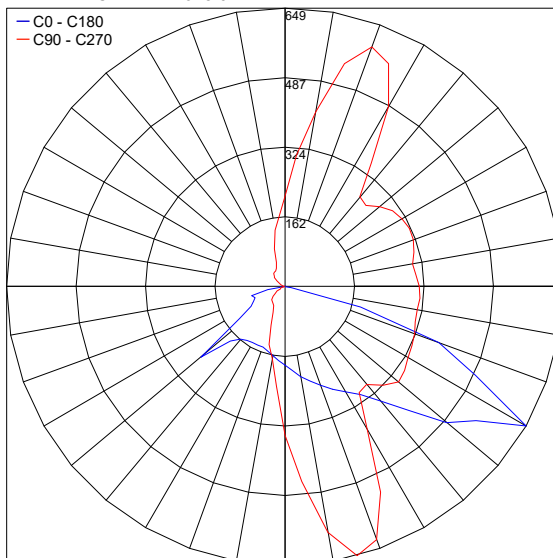

PHOTOMETRIC FILENAME : PERISCOPE 01 14W 601602.IES

Job Name/Date:

Fixture Type Designation: