

Phantom is a recessed wall-washer LED luminaire made of Coral® that becomes an integral part of the wall or ceiling. It is available in 3000K as standard with a 14° optic.



## TECHNICAL DATA


<b>Wattage / Input</b>	2W (500mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Coral®
<b>CCT</b>	3000K (2700K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	150 lm (3000K)
<b>Efficacy</b>	75 lm/W
<b>Optics</b>	14°
<b>Finishes</b>	Coral®
<b>LED Source</b>	COB professional LED
<b>Fixture Dimensions</b>	4.13" w x 10.24" l x 2.76" h
<b>Cut-out Dimension</b>	4.53" x 10.63"
<b>Aperature</b>	1.77" x 7.87"
<b>Fixture Weight</b>	3.09 lbs
<b>IP Rating</b>	IP40
<b>JA8</b>	Exempt

The body is made of Coral® a unique patented composite material made from natural minerals and aggregating elements.

Additionally, Coral® is:

- Extreme resistance to high temperatures and thermal shock.
- Highly impervious to knocks and scratches.
- Can easily be decorated with any type of paint (water or spirit based).
- Made of non-toxic materials and is non-allergic.
- Does not produce fumes, even in case of fire.
- Naturally dust repellent.

Fixture Dimensions

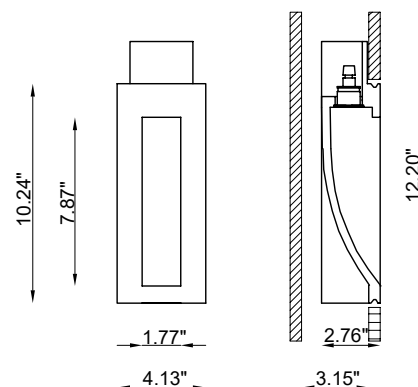

## ORDERING INFORMATION

**Example: BU6488.30.00.US. Power Supplies ordered separately.**

BU6488		00	US
<b>Model No.</b>	<b>CCT</b>	<b>Finish</b>	
BU6488	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	00 - Coral®	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2	1-5
<a href="#">PPLT00469</a>	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	4-7
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-16
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	2-17

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00259</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	4-5
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	6-9
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	12-13

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 8.9

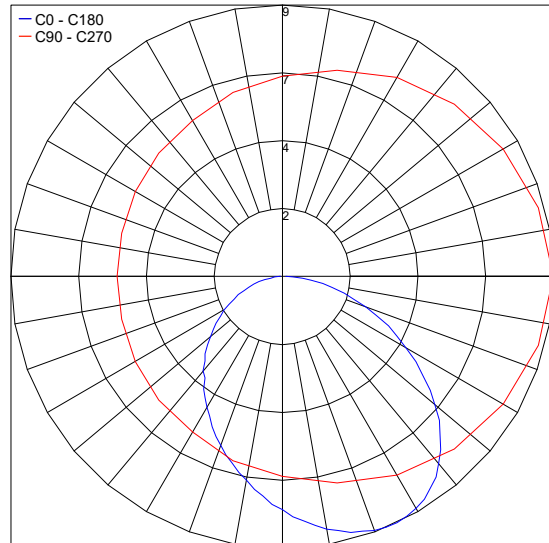

Job Name/Date:

Fixture Type Designation: