


PICA ZERO IP54

BATHROOM

Pica Zero is a recessed luminaire for use in walls as orientation lighting. It is available as an indoor (IP20), bathroom (IP54) or outdoor (IP54) version. Pica Zero differs from the other versions by a ring in the center of the fixture. It can be directly installed in solid walls, and gypsum walls with an optional plasterkit.



Wall Cut-Out: 5.20" x 5.20"
Fixture Dimensions

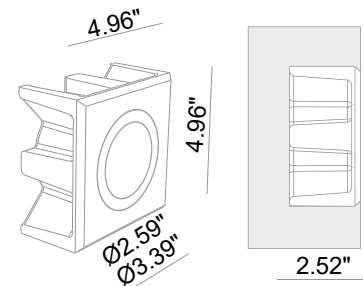

TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 1W, 2W, 4W (350mA) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Calcyt® Plaster Lens: Frosted Diffuser |
| CCT | 2200K, 2700K, 3000K, 4000K, Royal Blue |
| CRI | >80 and >90 |
| Optics | Fixed |
| Delivered Lumens | 38 lm (1W, 3000K) |
| Efficacy | 38 lm/W |
| Finishes | Paintable Plaster |
| Cut-Out Dimensions | 5.20" x 5.20" |
| Fixture Dimensions | 4.96" l x 4.96" w x 2.52" |
| Aperature | Ø3.39" Outer Ring Ø2.59 Inner Ring |
| Color Consistency | 3-Step MacAdam |
| IP Rating | IP54 |

ORDERING INFORMATION

Example: 128 62 301. Accessories / Power Supplies ordered separately.

| Model No. | Description | Model No. | Description |
|-------------------------|----------------------------------|-------------------------|----------------------------------|
| 128 60 501 - 2200K | 1W, 100 lm, CRI 80, IP54 Outdoor | 125 61 501 - 2200K | 4W, 400 lm, CRI 80, IP54 Outdoor |
| 128 60 001 - 2700K | 1W, 100 lm, CRI 90, IP54 Outdoor | 125 61 001 - 2700K | 4W, 400 lm, CRI 90, IP54 Outdoor |
| 128 60 101 - 3000K | 1W, 100 lm, CRI 90, IP54 Outdoor | 125 61 101 - 3000K | 4W, 400 lm, CRI 90, IP54 Outdoor |
| 128 60 201 - 4000K | 1W, 100 lm, CRI 90, IP54 Outdoor | 125 61 201 - 4000K | 4W, 400 lm, CRI 90, IP54 Outdoor |
| 128 60 301 - Royal Blue | 1W, 100 lm, IP54 Outdoor | 125 61 301 - Royal Blue | 4W, 400 lm, IP54 Outdoor |
| 128 62 501 - 2200K | 2W, 200 lm, CRI 80, IP54 Outdoor | | |
| 128 62 001 - 2700K | 2W, 200 lm, CRI 90, IP54 Outdoor | | |
| 128 62 101 - 3000K | 2W, 200 lm, CRI 90, IP54 Outdoor | | |
| 128 62 201 - 4000K | 2W, 200 lm, CRI 90, IP54 Outdoor | | |
| 128 62 301 - Royal Blue | 2W, 200 lm, IP54 Outdoor | | |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA


| Part Number | Description | Input/Output | # of Fixtures | | |
|-----------------------------|------------------------------------|------------------------------------|---------------|-------------|------------|
| | | | 1W | 2W | 4W |
| PPLT00138 | 0-10V Dimming to 10% | 120-277VAC to 350mA, 4W, Class 2 | 2-3 | 1-1 | N/A |
| PPLT00468 | Phase Dim (120V only) | 120VAC to 350mA, 14W, Class 2 | 4-13 | 2-6 | 1-3 |
| PPLT00308-P | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 30W, Class 2 | 1-19 | 1-9 | 1-4 |
| PPLT00309-P | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 50W, Class 2 | 1-19 | 1-9 | 1-4 |
| PPLT00538-P | 0-10V Dimming to 0.1% (4 channels) | 120-277VAC to 350mA, 100W, Class 2 | 1-20 (1-80) | 1-10 (1-40) | 1-5 (1-20) |

Suggested Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures | | |
|---------------------------|----------------|------------|-----------|---|-----------------------------------|---------------|-----|-----|
| | | | | | | 1W | 2W | 4W |
| PPLT00247 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 350mA, 7W, Class 2 | 3-6 | 2-3 | 1-1 |
| PPLT00516 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 350mA, 13W, Class 2 | 6-13 | 3-6 | 2-3 |
| PPLT00179 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 350mA, 19W, Class 2 | 11-18 | 6-9 | 3-4 |

For other power supply options consult factory.

REQUIRED ACCESSORIES - Installation



725 01 000
Outer Casing

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: