



PIPEDINO

WALL LAMP, DIRECT,
INDIRECT OR BI-EMISSION LIGHT

Indoor Surface

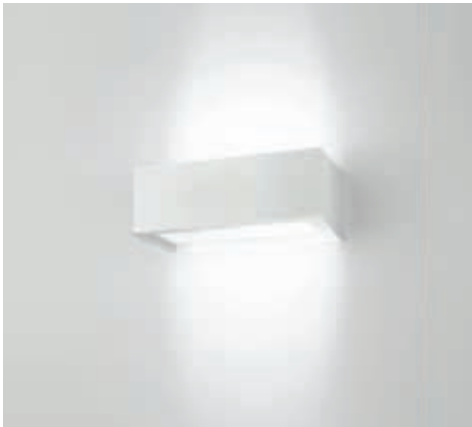

Pipedino Open

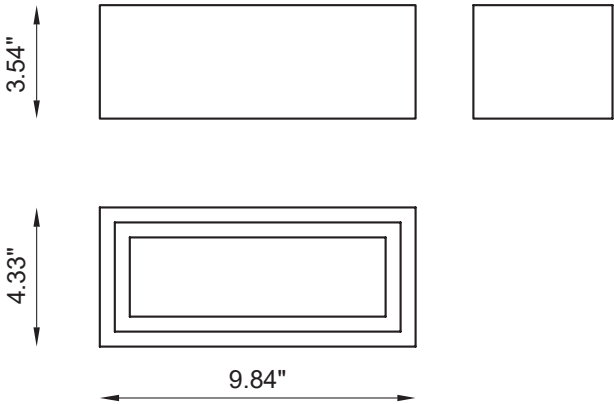

OTHER AVAILABLE CODES

| | | |
|--------------|--------------------|---------------------|
| BU2926.27.AC | <i>lens</i> | 120° |
| | <i>light color</i> | 2700K |
| BU2926.40.AC | <i>lens</i> | 120° |
| | <i>light color</i> | 4000K (on request). |

TECHNICAL FEATURES

| | |
|----------------------|--|
| Code | BU2926.AC |
| Type | Wall lamp |
| | |
| Material | AC: AirCoral® |
| Absorption capacity* | 54.79 ft² |
| Mounting | Wall mounting |
| IP rating | IP20 |
| Control gear | Dimmable constant current driver (included) |
| Lamp type | LED 500 mA |
| | |
| Lamp wattage | 2 × 6.5W |
| Luminous efficacy | 2 × 930 lm - 3000K |
| Light distribution | Wide beam 120° |
| Fitting | - |
| Light color | White 3000K |
| Voltage connection | 50/60Hz |
| CRI | >90 |
| Note | Trailing-edge and leading-edge dimming (20 - 100%). |
| | Satin glass included. |
| | Other available light colors: 2700K, 4000K (on request). |



79 Trenton Avenue
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042


* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²



Pipedino Direct

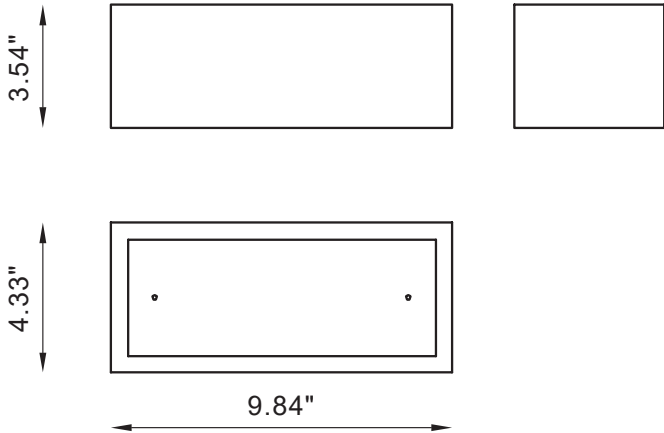

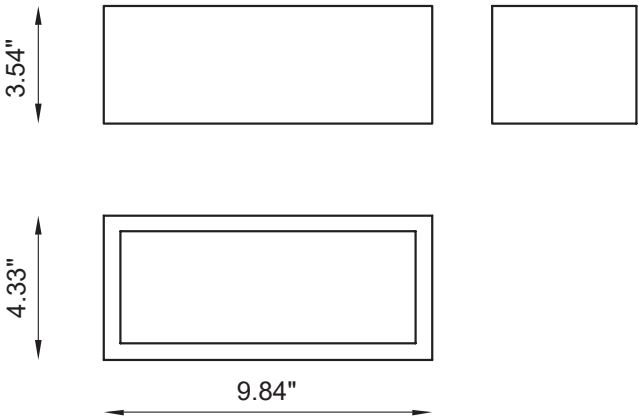

Pipedino Indirect



OTHER AVAILABLE CODES

| | | |
|--------------|--------------------|-------|
| BU2928.27.AC | <i>lens</i> | 120° |
| | <i>light color</i> | 2700K |



TECHNICAL FEATURES

| | |
|----------------------|---|
| Code | BU2928.AC |
| Type | Wall lamp |
| |  |
| Material | AC: AirCoral® |
| Absorption capacity* | 58.88 ft² |
| Mounting | Wall mounting |
| IP rating | IP40 |
| Control gear | Dimmable constant current driver (included) |
| Lamp type | LED 500 mA |
| |  |
| Lamp wattage | 1 × 6.5W |
| Luminous efficacy | 1 × 930 lm - 3000K |
| Light distribution | Wide beam 120° |
| Fitting | - |
| Light color | White 3000K |
| Voltage connection | 50/60Hz |
| CRI | >90 |
| Note | Trailing-edge and leading-edge dimming (20 - 100%). |
| | Extra white frosted glass fixed with polycarbonate screws. |
| | Other available light colors: 2700K, 4000K (on request). |

OTHER AVAILABLE CODES

| | | |
|--------------|--------------------|-------|
| BU2936.27.AC | <i>lens</i> | 120° |
| | <i>light color</i> | 2700K |

TECHNICAL FEATURES

| | |
|----------------------|---|
| Code | BU2936.AC |
| Type | Wall lamp |
| |  |
| Material | AC: AirCoral® |
| Absorption capacity* | 58.88 ft² |
| Mounting | Wall mounting |
| IP rating | IP20 |
| Control gear | Dimmable constant current driver (included) |
| Lamp type | LED 500 mA |
| |  |
| Lamp wattage | 1 × 6.5W |
| Luminous efficacy | 1 × 930 lm - 3000K |
| Light distribution | Wide beam 120° |
| Fitting | - |
| Light color | White 3000K |
| Voltage connection | 50/60Hz |
| CRI | >90 |
| Note | Trailing-edge and leading-edge dimming (20 - 100%). |
| | Satin glass included. |
| | Other available light colors: 2700K, 4000K (on request). |



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²