

Pipedino Direct is a surface mounted luminaire with direct light made of AirCoral® that is suitable for indoor installation. It is available in 3000K as standard with a 120° optic.



TECHNICAL DATA


Wattage / Input	6.5W (120-277VAC)
Power Supply	Integral
Dimming	Trailing / Leading Edge Dimming
Construction	Body: AirCoral® Lens: Frosted Glass
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	800 lm (3000K)
Efficacy	123.1 lm/W
Optics	120°
Finishes	AirCoral®
Fixture Dimensions	9.48" l x 4.33" w x 3.54" h
Fixture Weight	-
IP Rating	IP40

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

Fixture Dimensions

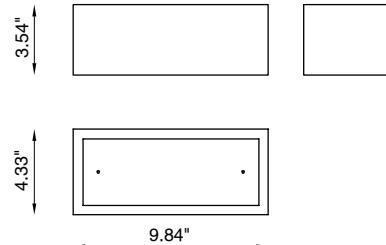

ORDERING INFORMATION

Example: BU2928.AC.US.

BU2928	.	AC	.	US
Model No.	CCT	Finish		
BU2928	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	AC - AirCoral®	US	


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 228.7

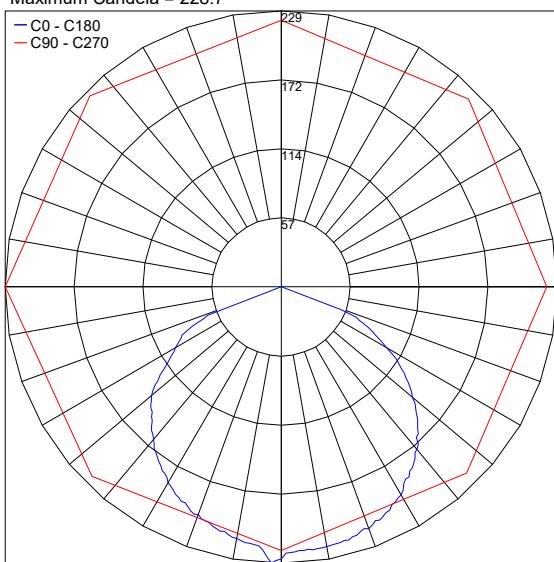

PHOTOMETRIC FILENAME : PIPEDINO DIRECT BU2928.AC 3000K 120°.IES

Job Name/Date:

Fixture Type Designation: