


Pipedino Direct is a surface mounted luminaire with direct light made of AirCoral® that is suitable for indoor installation. It is available in 3000K as standard with a 120° optic.



## TECHNICAL DATA

<b>Wattage / Input</b>	6.5W (120-277VAC)
<b>Power Supply</b>	Integral
<b>Dimming</b>	Trailing / Leading Edge Dimming
<b>Construction</b>	Body: AirCoral® Lens: Frosted Glass
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	800 lm (3000K)
<b>Efficacy</b>	123.1 lm/W
<b>Optics</b>	120°
<b>Finishes</b>	AirCoral®
<b>Fixture Dimensions</b>	9.48" l x 4.33" w x 3.54" h
<b>Fixture Weight</b>	-
<b>IP Rating</b>	IP20

Fixture Dimensions

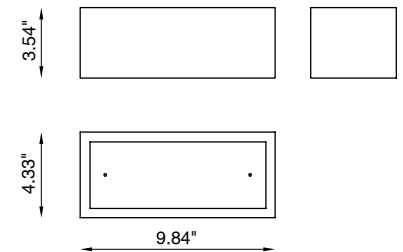

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

## ORDERING INFORMATION

Example: BU2928.AC.US.

BU2928		AC	US
<b>Model No.</b>	<b>CCT</b>	<b>Finish</b>	
BU2928	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	AC - AirCoral®	US


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 228.7

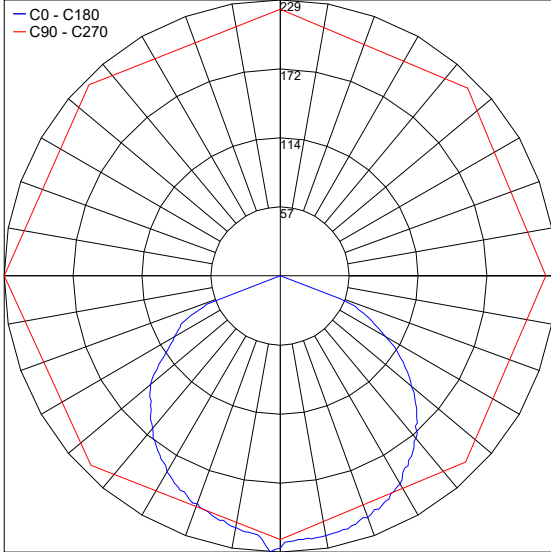

PHOTOMETRIC FILENAME : PIPEDINO DIRECT BU2928.AC 3000K 120°.IES

Job Name/Date:

Fixture Type Designation: