

PIPEDINO DIRECT

Pipedino Direct is a surface mounted luminaire with direct light made of AirCoral® that is suitable for indoor installation. It is available in 3000K as standard with a 120° optic.



TECHNICAL DATA


Wattage / Input	6.5W (120-277VAC)
Power Supply	Integral
Construction	Body: AirCoral® Lens: Frosted Glass
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	800 lm (3000K)
Efficacy	123.1 lm/W
Optics	120°
Finishes	AirCoral®
Fixture Dimensions	9.48" l x 4.33" w x 3.54" h
Fixture Weight	-
IP Rating	IP40

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for AirCoral® calculator.

Additionally, AirCoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

Fixture Dimensions

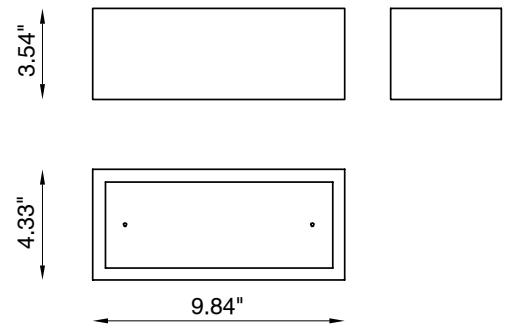

ORDERING INFORMATION

Example: BU2928.AC.US.


BU2928		AC	US
Model No.	CCT	Finish	
BU2928	27 - 2700K 30 - 3000K 40 - 4000K	AC - AirCoral®	US

Job Name/Date:

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 228.7

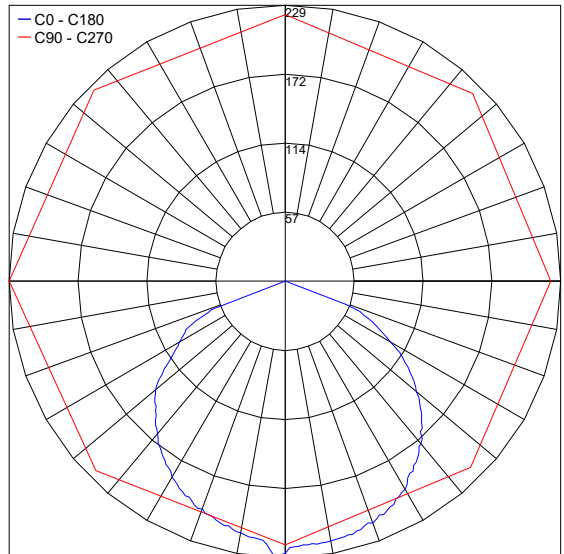

Fixture Type Designation: