

# PIPEDINO OPEN

designplan®

datasheet

Pipedino Open is a surface mounted luminaire with bidirectional light made of AirCoral® that is suitable for indoor installation. It is available in 3000K as standard with a 120° optic.



## TECHNICAL DATA


<b>Wattage / Input</b>	2 x 6.5W (120-277VAC)
<b>Power Supply</b>	Integral
<b>Dimming</b>	Trailing / Leading Edge Dimming
<b>Construction</b>	Body: AirCoral®
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	810 lm per beam (3000K)
<b>Efficacy</b>	124.6 lm/W
<b>Optics</b>	120°
<b>Finishes</b>	AirCoral®
<b>Fixture Dimensions</b>	9.84" l x 4.33" w x 3.54" h
<b>Fixture Weight</b>	-
<b>IP Rating</b>	IP20

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

Antibacterial.  
Antifungal.  
Scratch-resistant.  
Dust-resistant.  
Suitable for painting.  
LEED recognized material.

Fixture Dimensions

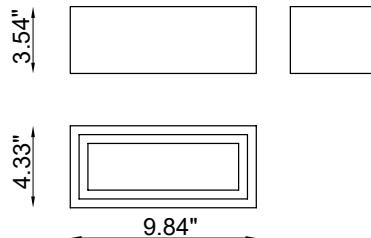

## ORDERING INFORMATION

Example: BU2926.30.AC.US.

BU2926		AC	US
<b>Model No.</b>	<b>CCT</b>	<b>Finish</b>	
BU2926	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	AC - AirCoral®	US


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 249

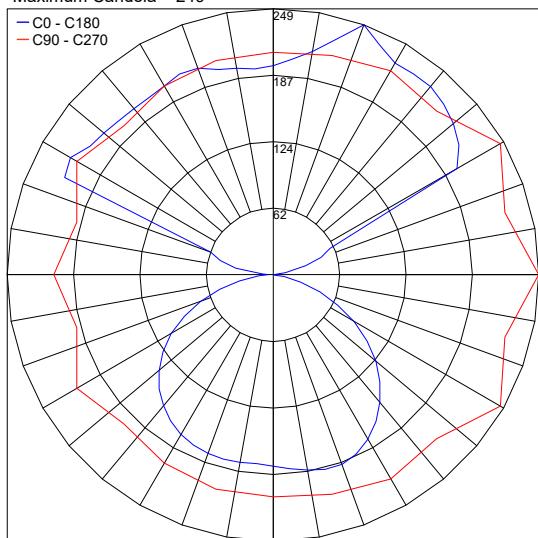

PHOTOMETRIC FILENAME : PIPEDINO OPEN BU2926.AC 3000K 120°.IES

Job Name/Date:

Fixture Type Designation: