

PIPEDINO OPEN

Pipedino Open is a surface mounted luminaire with bidirectional light made of AirCoral® that is suitable for indoor installation. It is available in 3000K as standard with a 120° optic.



TECHNICAL DATA


Wattage / Input	2 x 6.5W (120-277VAC)
Power Supply	Integral
Construction	Body: AirCoral®
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	810 lm per beam (3000K)
Efficacy	124.6 lm/W
Optics	120°
Finishes	AirCoral®
Fixture Dimensions	9.84" l x 4.33" w x 3.54" h
Fixture Weight	-
IP Rating	IP20

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.


Fixture Dimensions

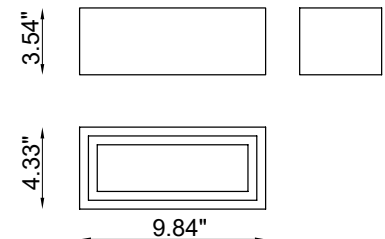

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 249

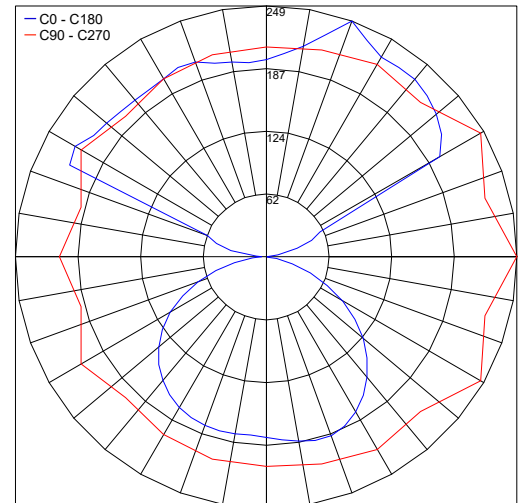

ORDERING INFORMATION

Example: BU2926.30.AC.US.

BU2926		AC	US
Model No.	CCT	Finish	
BU2926	27 - 2700K 30 - 3000K 40 - 4000K	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation: