

PIPEDO



Pipedo Open




OTHER AVAILABLE CODES

BU2916.27.AC	lens light color	120° 2700K
BU2916.40.AC	lens light color	120° 4000K (on request)

TECHNICAL FEATURES

Code	BU2916.AC
Type	Wall lamp
Material	 AC: AirCoral®
Absorption capacity*	109.68 ft ²
Mounting	Wall mounting
IP rating	IP20
Control gear	Dimmable constant current driver (included)
Lamp type	LED 500 mA
Lamp wattage	2 x 12W
Luminous efficacy	2 x 1340 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K
Voltage connection	50/60Hz
CRI	>90
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colors: 2700K, 4000K (on request).

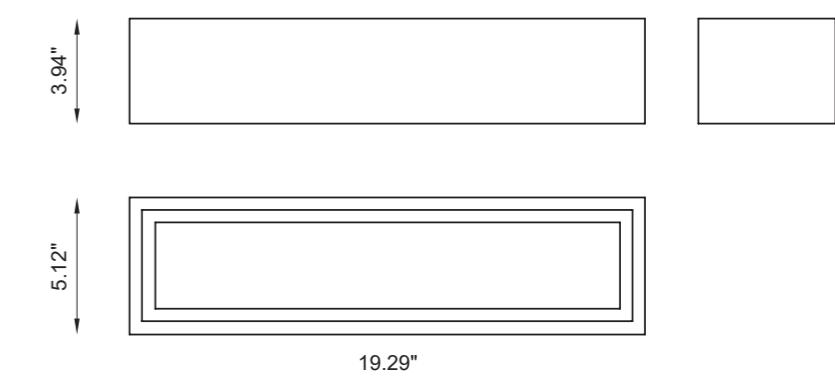


designplan® 


79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710
Fax: (908) 996-7042

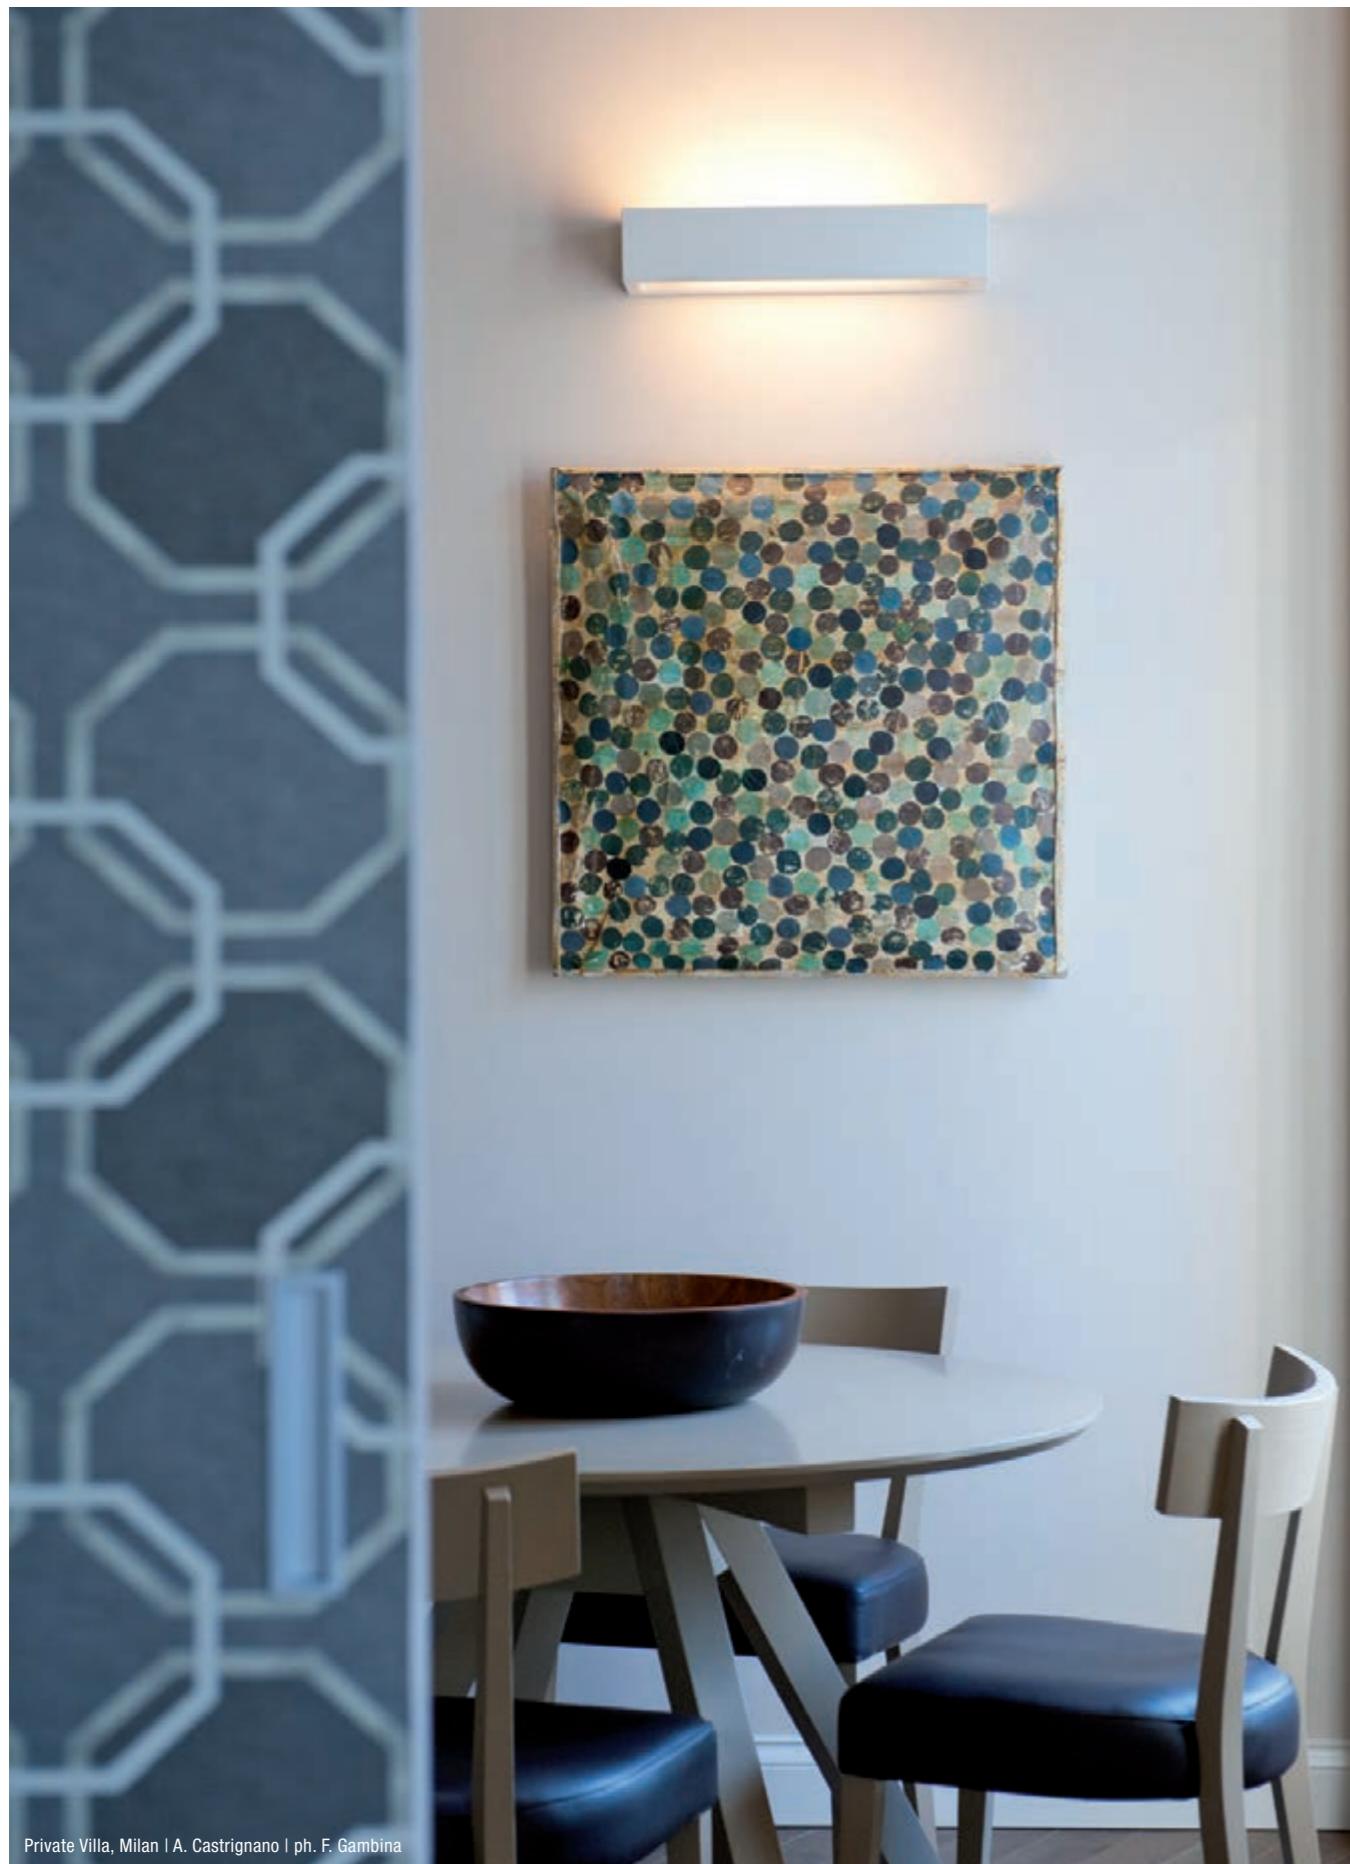

Private Villa, Milan | A. Castrignano | ph. F. Gambina

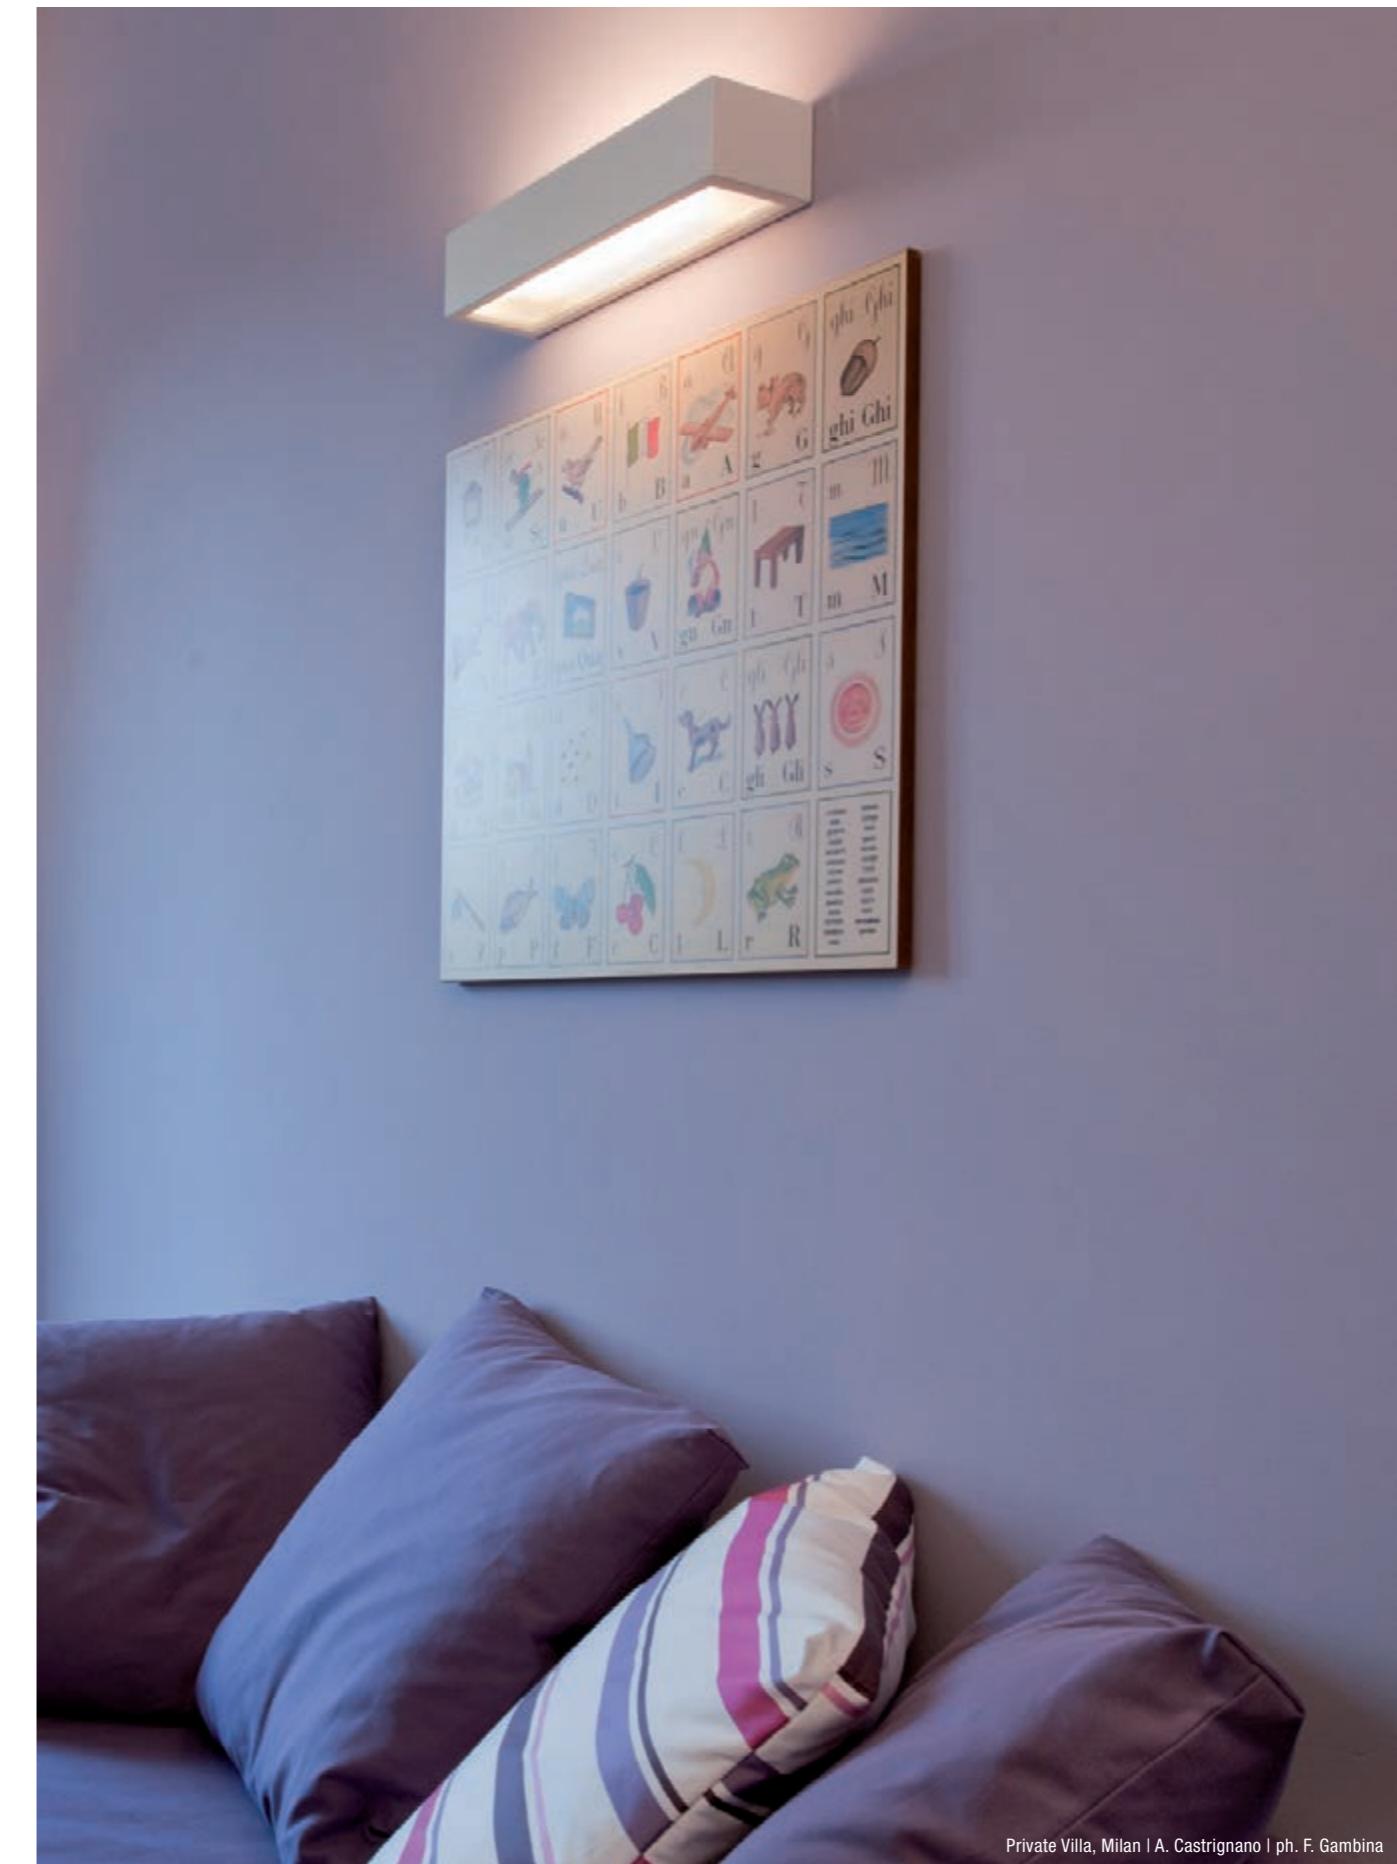

Private Villa, Milan | A. Castrignano | ph. F. Gambina

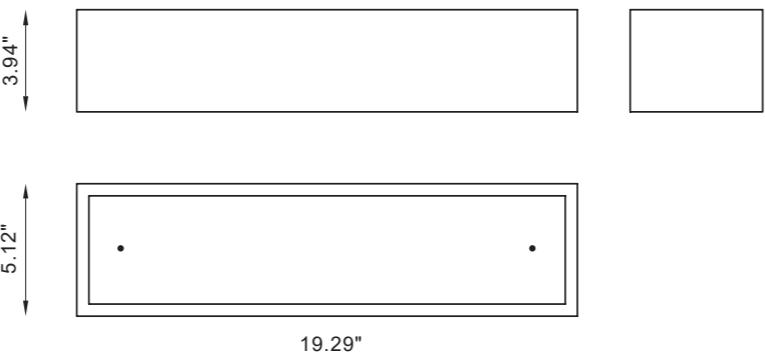

Pipedo Direct




OTHER AVAILABLE CODES

BU2968.27.AC lens 120°
light color 2700K

TECHNICAL FEATURES

Code	BU2968.AC
Type	Wall lamp
Material	AC: AirCoral®
Absorption capacity*	143.27 ft ²
Mounting	Wall mounting
IP rating	IP40
Control gear	Dimmable constant current driver (included)
Lamp type	LED 500 mA
Lamp wattage	1 × 12W
Luminous efficacy	1 × 1340 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K
Voltage connection	50/60Hz
CRI	>90
Note	Trailing-edge and leading-edge dimming (20 - 100%). Extra white frosted glass fixed with polycarbonate screws. Other available light colors: 2700K, 4000K (on request).

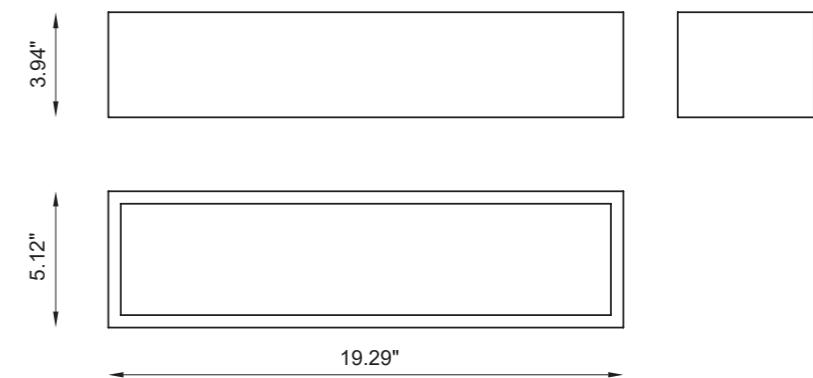

Pipedo Indirect



OTHER AVAILABLE CODES

BU2908.27.AC lens 120°
light color 2700K

TECHNICAL FEATURES

Code	BU2908.AC
Type	Wall lamp
Material	AC: AirCoral®
Absorption capacity*	143.27 ft ²
Mounting	Wall mounting
IP rating	IP20
Control gear	Dimmable constant current driver (included)
Lamp type	LED 500 mA
Lamp wattage	1 × 12W
Luminous efficacy	1 × 1340 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K
Voltage connection	50/60Hz
CRI	>90
Note	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included. Other available light colors: 2700K, 4000K (on request).

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042