

Pipedo Direct is a surface mounted luminaire with direct downward light made of AirCoral® that is suitable for indoor installation. It is available in 3000K with a 120° optic as standard.



TECHNICAL DATA


Wattage / Input	12W (120-277VAC)
Power Supply	Integral
Construction	Body: AirCoral® Lens: Frosted Glass
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	575 lm (3000K)
Efficacy	71.8 lm/W
Optics	120°
Finishes	Paintable Plaster
Fixture Dimensions	19.29" l x 5.12" w x 3.94" h
Fixture Weight	-
IP Rating	IP20

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.*
- Antifungal.*
- Scratch-resistant.*
- Dust-resistant.*
- Suitable for painting.*
- LEED recognized material.*

Fixture Dimensions

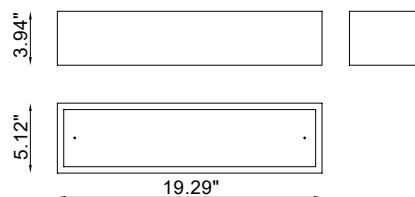

ORDERING INFORMATION


Example: BU2968.27.AC.US.

BU2968	.	AC	.	US
Model No.	CCT	Finish		
BU2968	30 - 3000K 27 - 2700K 40 - 4000K	AC - AirCoral®	US	

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

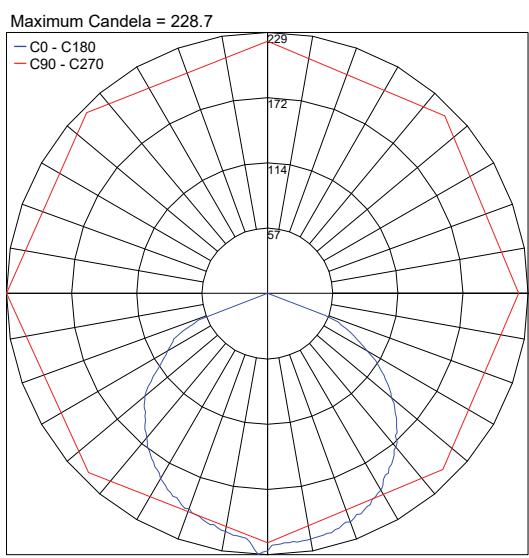

PHOTOMETRIC FILENAME : PIPDEO DIRECT BU2968.AC.IES

Job Name/Date:

Fixture Type Designation: