

Pipedo Indirect is a surface mounted luminaire with upward light made of AirCoral® that is suitable for indoor installation. It is available in 3000K with a 120° optic as standard.



TECHNICAL DATA


Wattage / Input	12W (120-277VAC)
Power Supply	Integral
Construction	Body: AirCoral®
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	1340 lm (3000K)
Efficacy	167.5 lm/W
Optics	120°
Finishes	Paintable Plaster
Fixture Dimensions	19.29" l x 5.12" w x 3.94" h
IP Rating	IP20

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

Fixture Dimensions

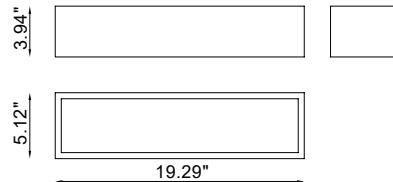

ORDERING INFORMATION

Example: BU2908.27.AC.US.


BU2908		AC	US
Model No.	CCT	Finish	
BU2908	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Maximum Candela = 974.3

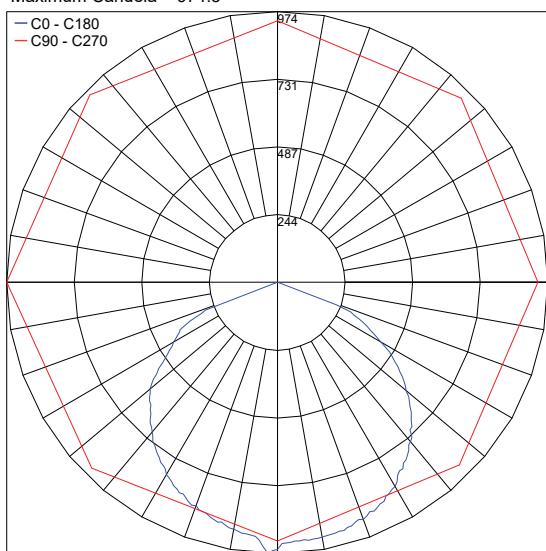

PHOTOMETRIC FILENAME : PIPEDO INDIRECT BU2908.AC.IES

Job Name/Date:

Fixture Type Designation: