

# PIPEDO INDIRECT


Pipedo Indirect is a surface mounted luminaire with upward light made of AirCoral® that is suitable for indoor installation. It is available in 3000K with a 120° optic as standard.



## TECHNICAL DATA

<b>Wattage / Input</b>	8W (120-277VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: AirCoral®
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1340 lm (3000K)
<b>Efficacy</b>	167.5 lm/W
<b>Optics</b>	120°
<b>Finishes</b>	Paintable Plaster
<b>Fixture Dimensions</b>	19.29" l x 5.12" w x 3.94" h
<b>IP Rating</b>	IP20
<b>IK Rating</b>	-

Fixture Dimensions

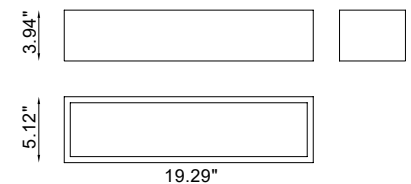

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

## ORDERING INFORMATION

Example: BU2908.AC.US.

BU2908	AC	US
<b>Model No.</b>	<b>Finish</b>	
BU2908	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

Maximum Candela = 974.3

