

PIVOT MINI 1


Pivot Mini 1 is a small, compact outdoor projector that can be surface mounted. It is available in 4 different optics and is adjustable 360° on the horizontal axis and +/- 90° on the vertical axis.

TECHNICAL DATA

Wattage / Input	2.5W, 3.5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-corrosive Aluminum Alloy EN AW 6082 Lens: Tempered Extra-clear Glass Neoprene Cable: 4.9' standard
CCT	2700K, 3000K, 4000K (3500K available, consult factory)
CRI	>80, >90
BUG Rating	B0-U0-G0 (3000K)
Delivered Lumens	101 lm (3000K, 15°, 2.5W, CRI 90) 118 lm (3000K, 15°, 2.5W, CRI 80) 134 lm (3000K, 15°, 3.5W, CRI 90) 158 lm (3000K, 15°, 3.5W, CRI 80)
Efficacy	40.4 lm/W (2.5W, CRI 90), 47.2 lm/W (2.5W, CRI 80) 38.3 lm/W (3.5W, CRI 90), 45.1 lm/W (3.5W, CRI 80)
Optics	4 Standard (see below)
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø0.98" x 1.93", Ø0.98" Base
Fixture Weight	0.30 lbs
LED Source	1 Power LED
Lumen Maintenance	L90, B10>50,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
Impact Rating	IK07



Fixture Dimensions



ORDERING INFORMATION

Example: CP0101100150ME or CP0101100150ME-2. Accessories / Power Supplies ordered separately.

CP010							
Model #	Wattage	CRI	Optical Accessory	CCT	Optics	Finish	Cable Length
CP010	0 - 2.5W 1 - 3.5W	0 - CRI 80 1 - CRI 90	000 - none 001 - Honeycomb Louvre Note: Honeycomb Louvre not compatible with the 30° sharp optics	F - 2700K 5 - 3000K 9 - 4000K	0S - 15° 0M - 21° 0P - 30° sharp* 0L - 35°* *OP & OL not available with honeycomb louvre	E - White H - Anthracite T - Cor-ten U - Copper C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures	
			2.5W	3.5W
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-7	1-5
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	5-32	4-22

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures	
			2.5W	3.5W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-30	1-21

For other power supply options consult factory.

ACCESSORIES - Anti-Glare



Honeycomb Louvre

built into the lighting fixture -
see code matrix above

Can be fitted on all fixed
optics, except for sharp optics
(P - 30° sharp) or L - 35°)



WBA02__

Standard Snoot



WBA03__

Asymmetric Snoot

For Snoots include one of the below finishes:

- E** - White
- H** - Anthracite
- T** - Cor-ten
- U** - Copper
- C** - Custom RAL

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation




AC-00003__

Mounting Canopy for "J" Box


For Canopy include one of the below finishes:

- E - White
- H - Anthracite
- T - Cor-ten
- U - Copper
- C - Custom RAL


OPTICS

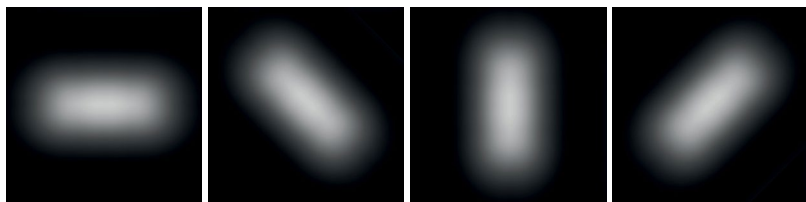

13°x68° - adjustable using the magnet

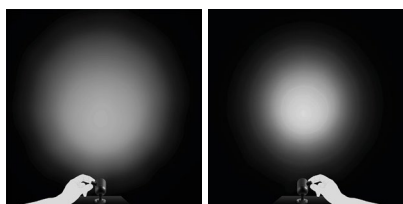

Manual Zoom - adjustable using the magnet



Fixed

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80

15° 2.5W


Maximum Candela = 1078

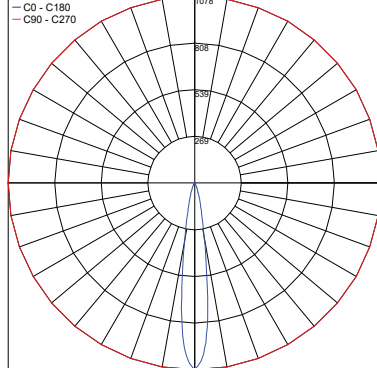

PHOTOMETRIC FILENAME : PIVOT MINI 1 S 15° [3000K CRI80 2.5W 24VDC].IES

15° 3.5W


Maximum Candela = 1443.4

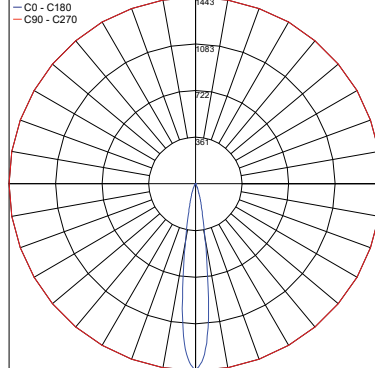

PHOTOMETRIC FILENAME : PIVOT MINI 1 S 15° [3000K CRI80 3.5W 24VDC].IES

35° 2.5W


Maximum Candela = 226.7

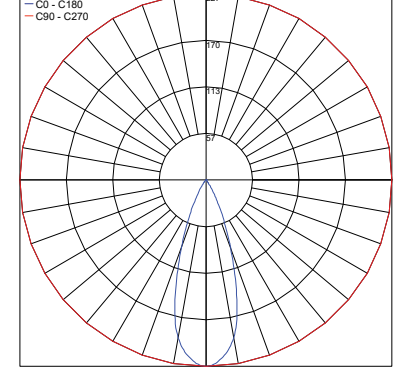

PHOTOMETRIC FILENAME : PIVOT MINI 1 L 35° [3000K CRI80 2.5W 24VDC].IES

21° 2.5W


Maximum Candela = 522.3

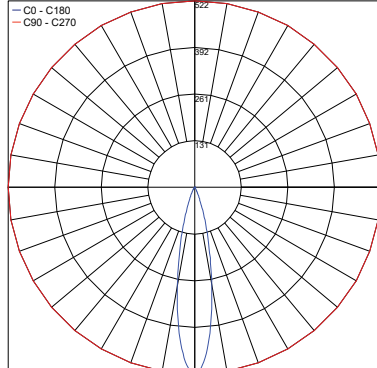

PHOTOMETRIC FILENAME : PIVOT MINI 1 M 21° [3000K CRI80 2.5W 24VDC].IES

21° 3.5W


Maximum Candela = 700.1

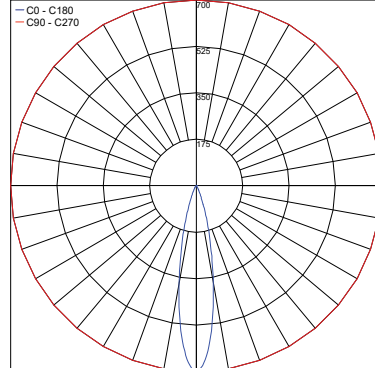

PHOTOMETRIC FILENAME : PIVOT MINI 1 M 21° [3000K CRI80 3.5W 24VDC].IES

35° 3.5W


Maximum Candela = 303.1

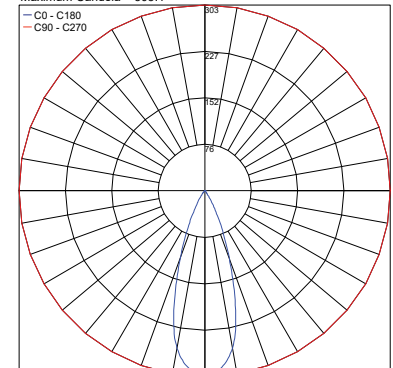

PHOTOMETRIC FILENAME : PIVOT MINI 1 L 35° [3000K CRI80 3.5W 24VDC].IES

30° 2.5W


Maximum Candela = 146.5

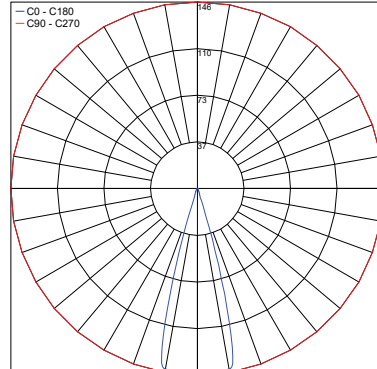

PHOTOMETRIC FILENAME : PIVOT MINI 1 P (30°) [3000K CRI80 2.5W 24VDC].IES

30° 3.5W

Maximum Candela = 199.3

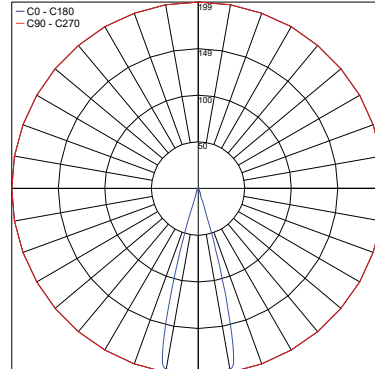

PHOTOMETRIC FILENAME : PIVOT MINI 1 P (30°) [3000K CRI80 3.5W 24VDC].IES

Job Name/Date:

Fixture Type Designation: