

PIXEL C


CEILING LAMP 1000 lm FROM
A HOLE OF 0.63 in



Pixel C

A/C


Indoor Surface

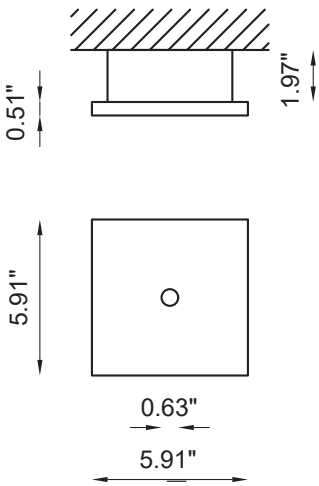

OTHER AVAILABLE CODES

BU1008.AC 4 S _ E _ WD	<i>light color</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	<i>lens</i>	
	15	15°
	25	25°
	45	45°
	BU1008.AC 4 S 15 E 27 WD	

TECHNICAL FEATURES

Code	BU1008.AC XX
Type	Ceiling lamp
	
Material	AC: AirCoral®
Absorption capacity*	14.96 ft²
Mounting	Ceiling mounting
IP rating	IP40
Control gear	Remote constant current driver (not included)
Lamp type	LED 700mA
	⚡ Vf: 11.5 VDC
Lamp wattage	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K
Light distribution	Narrow beam 15° Beam 25° 45° (on request)
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Light hole	Ø 0.63 in
Voltage connection	By driver (optional)
CRI	90
Note	On request available dimmable PUSH or DALI, remote installation.



PIXEL
see page 163

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²