



^
PLIN 6.1
3000K, 14W, anthracite

SQUARE HEAD

2700K 3000K 4000K



diffuse



PLIN 1.0
12W 24VDC
h 11.81 in



PLIN 1.1
12W 24VDC
h 23.62 in



PLIN 1.2
12W 24VDC
h 31.50 in

2700K 3000K 4000K



asymmetrical
diffuse



PLIN 2.0
12W 24VDC
h 10.24 in




PLIN 2.1
12W 24VDC
h 22.05 in



PLIN 2.2
12W 24VDC
h 29.92 in

2700K 3000K 4000K



asymmetrical
diffuse



PLIN 3.0
24W 24VDC
h 10.24 in



PLIN 3.1
24W 24VDC
h 22.05 in



PLIN 3.2
24W 24VDC
h 29.92 in



Designplan | L&L Luce&Light

OUTDOOR BOLLARDS

ROUND HEAD

2700K 3000K 4000K



diffuse



PLIN 4.0
8W 24VDC
h 12.60 in



PLIN 4.1
8W 24VDC
h 24.41 in



PLIN 4.2
8W 24VDC
h 32.28 in

2700K 3000K 4000K



asymmetrical
diffuse



PLIN 5.0
8W 24VDC
h 11.22 in



PLIN 5.1
8W 24VDC
h 23.03 in



PLIN 5.2
8W 24VDC
h 30.91 in

2200K 2700K 3000K 4000K



asymmetrical
circular



PLIN 6.0
14W 24VDC
h 11.22 in




PLIN 6.1
14W 24VDC
h 23.03 in



PLIN 6.2
14W 24VDC
h 30.91 in



^
PLIN 1.1
 3000K, anthracite
 Light planning by/ KA2 Light Architecture
 Caméo Moscow Villas, Moscow, Russia

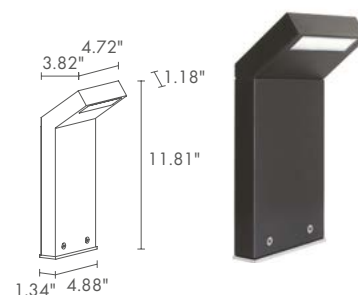

PLIN 1.0



CB



2.87 lbs IP65 IK08



POWER / MODEL CODE

12W 24VDC h 11.81 in
PN1010 **A E** White
PN1010 **A F** Grey
PN1010 **A H** Anthracite
PN1010 **A T** Cor-ten

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE	1242 lm (3000K)
DELIVERED LUMEN OUTPUT	558 lm (3000K)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L85 B10 (Ta 25°C)
MATERIAL	head in die-cast aluminum, column in aluminum screen in serigraphed, tempered, extra-clear microprismatic glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ground)
NOTES	non-standard heights available on request Casambi-compatible version, controllable with the Casambi app, available on request





PLIN 1.1



CB



4.85 lbs IP65 IK08

12W 24VDC h 23.62 in

PN1110 **A E** White
PN1110 **A F** Grey
PN1110 **A H** Anthracite
PN1110 **A T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

1242 lm (3000K)

558 lm (3000K)


18 mid-power LEDs
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

head in die-cast aluminum, column in aluminum
 screen in serigraphed, tempered, extra-clear
 microprismatic glass

remote power supply required, not included

surface mounted (ground)

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

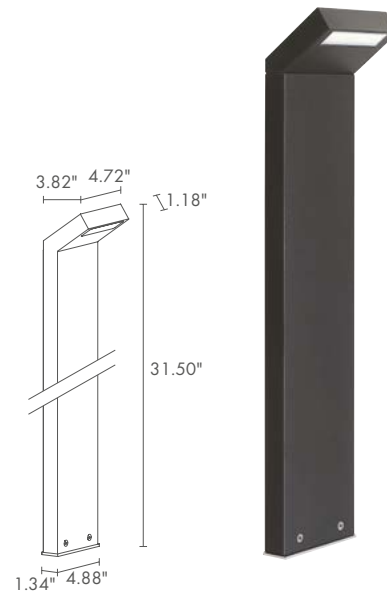

PLIN 1.2



CB



5.51 lbs IP65 IK08

12W 24VDC h 31.50 in

PN1210 **A E** White
PN1210 **A F** Grey
PN1210 **A H** Anthracite
PN1210 **A T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

1242 lm (3000K)

558 lm (3000K)

18 mid-power LEDs
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

head in die-cast aluminum, column in aluminum
 screen in serigraphed, tempered, extra-clear
 microprismatic glass

remote power supply required, not included

surface mounted (ground)

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request



Cor-ten



^
PLIN 2.2
 3000K, 12W, anthracite
ICE LED 1.0
 2700K, 1W



PLIN 2.0



CB



3.09 lbs IP65 IK08





POWER / MODEL CODE	12W 24VDC h 10.24 in
	PN2010 A E White
	PN2010 A F Grey
	PN2010 A H Anthracite
	PN2010 A T Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical diffuse

LUMEN OUTPUT AT SOURCE	1242 lm (3000K)
DELIVERED LUMEN OUTPUT	492 lm (3000K)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L85 B10 (Ta 25°C)
MATERIAL	head and column in aluminum screen in serigraphed, tempered transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ground)
NOTES	non-standard heights available on request Casambi-compatible version, controllable with the Casambi app, available on request



Designplan | L&L Luce&Light

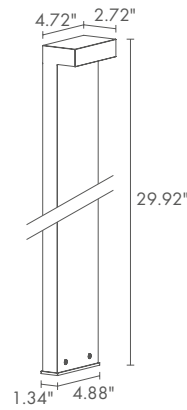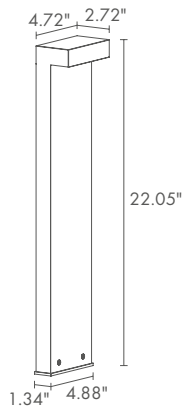

PLIN 2.1



CB



4.23 lbs IP65 IK08

12W 24VDC h 22.05 in

PN2110 **A E** White
PN2110 **A F** Grey
PN2110 **A H** Anthracite
PN2110 **A T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

asymmetrical diffuse

1242 lm (3000K)

492 lm (3000K)

18 mid-power LEDs
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

head and column in aluminum
 screen in serigraphed, tempered transparent
 extra-clear glass

remote power supply required, not included

surface mounted (ground)

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

PLIN 2.2



CB



4.30 lbs IP65 IK08

12W 24VDC h 29.92 in

PN2210 **A E** White
PN2210 **A F** Grey
PN2210 **A H** Anthracite
PN2210 **A T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

asymmetrical diffuse

1242 lm (3000K)

492 lm (3000K)

18 mid-power LEDs
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

head and column in aluminum
 screen in serigraphed, tempered transparent
 extra-clear glass

remote power supply required, not included


surface mounted (ground)

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request





^
PLIN 3.1
4000K, 24W, anthracite



PLIN 3.0



CB




3.97 lbs IP65 IK08




POWER / MODEL CODE	24W 24VDC h 10.24 in
	PN3010 A E White
	PN3010 A F Grey
	PN3010 A H Anthracite
	PN3010 A T Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical diffuse

LUMEN OUTPUT AT SOURCE	2484 lm (3000K)
DELIVERED LUMEN OUTPUT	984 lm (3000K)
NO. AND TYPE OF LED	36 mid-power LEDs 3-step MacAdam, 50000h L85 B10 (Ta 25°C)
MATERIAL	head and column in aluminum screen in serigraphed, tempered transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ground)
NOTES	non-standard heights available on request Casambi-compatible version, controllable with the Casambi app, available on request



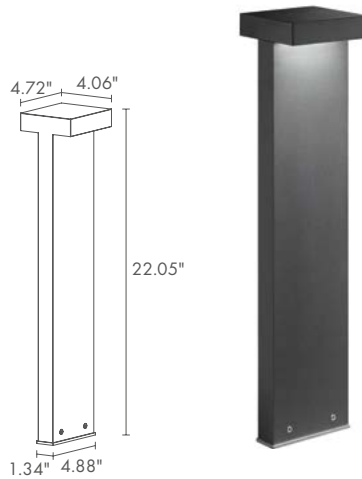

PLIN 3.1



CB



4.85 lbs

IP65

IK08

24W 24VDC h 22.05 in

PN3110 **A E** White

PN3110 **A F** Grey

PN3110 **A H** Anthracite

PN3110 **A T** Corten

F - 2700K
5 - 3000K
9 - 4000K

asymmetrical diffuse

2484 lm (3000K)

984 lm (3000K)


36 mid-power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

head and column in aluminum
screen in serigraphed, tempered transparent
extra-clear glass


remote power supply required, not included

surface mounted (ground)

non-standard heights available
on request
Casambi-compatible version, controllable with
the Casambi app, available on request

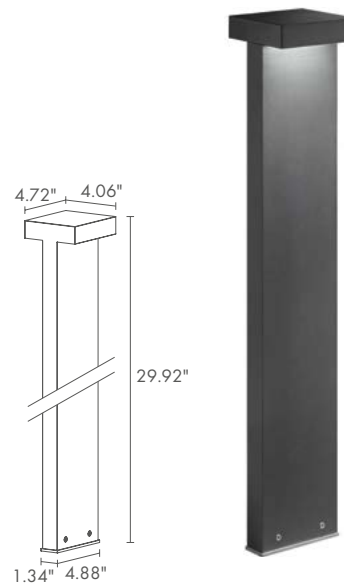

PLIN 3.2



CB



5.18 lbs

IP65

IK08

24W 24VDC h 29.92 in

PN3210 **A E** White

PN3210 **A F** Grey

PN3210 **A H** Anthracite

PN3210 **A T** Corten

F - 2700K
5 - 3000K
9 - 4000K

asymmetrical diffuse

2484 lm (3000K)

984 lm (3000K)

36 mid-power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

head and column in aluminum
screen in serigraphed, tempered transparent
extra-clear glass

remote power supply required, not included

surface mounted (ground)

non-standard heights available
on request
Casambi-compatible version, controllable with
the Casambi app, available on request



White

Grey

Anthracite

Corten





^
PLIN 4.0
4000K, 8W, anthracite



PLIN 4.0

CB



kg 1.80

IP65 IK07



POWER / MODEL CODE

8W 24VDC h 12.60 in
PN40100 **D E** White
PN40100 **D F** Grey
PN40100 **D H** Anthracite
PN40100 **D T** Corten

LED COLOR


F - 2700K
5 - 3000K
9 - 4000K

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE	488 lm (3000K)
DELIVERED LUMEN OUTPUT	423 lm (3000K)
NO. AND TYPE OF LED	1 power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	head in aluminum, column in stainless steel screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ground)
ACCESSORIES	see accessories page
NOTES	non-standard heights available on request Casambi-compatible version, controllable with the Casambi app, available on request



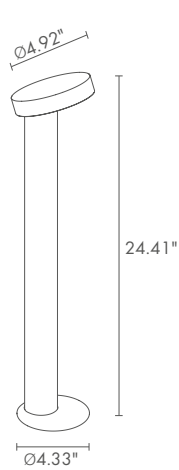

PLIN 4.1

CB



5.84 lbs IP65 IK07

8W 24VDC h 24.41 in

PN41100 **D E** White
PN41100 **D F** Grey
PN41100 **D H** Anthracite
PN41100 **D T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

488 lm (3000K)

423 lm (3000K)

1 power LED
 3-step MacAdam, 50000h L90 B10 (Ta 25°C)


head in aluminum, column in stainless steel
 screen in serigraphed and transparent,
 tempered extra-clear glass

remote power supply required, not included

surface mounted (ground)

see accessories page

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

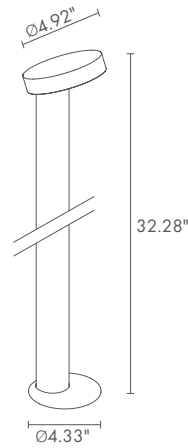

PLIN 4.2

CB



6.83 lbs IP65 IK07

8W 24VDC h 32.28 in

PN42100 **D E** White
PN42100 **D F** Grey
PN42100 **D H** Anthracite
PN42100 **D T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

488 lm (3000K)

423 lm (3000K)

1 power LED
 3-step MacAdam, 50000h L90 B10 (Ta 25°C)

head in aluminum, column in stainless steel
 screen in serigraphed and transparent,
 tempered extra-clear glass

remote power supply required, not included

surface mounted (ground)


see accessories page

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request





^
PLIN 5.1
4000K, 8W, anthracite



PLIN 5.0



CB



3.97 lbs IP65 IK07



POWER / MODEL CODE

8W 24VDC h 11.22 in
PN50100 **A E** White
PN50100 **A F** Grey
PN50100 **A H** Anthracite
PN50100 **A T** Cor-ten

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K

OPTICS

asymmetrical

LUMEN OUTPUT AT SOURCE 488 lm (3000K)

DELIVERED LUMEN OUTPUT 173 lm (3000K)

NO. AND TYPE OF LED 1 power LED
 3-step MacAdam, 50000h L90 B10 (Ta 25°C)

MATERIAL head in aluminum, column in stainless steel
 screen in serigraphed and transparent,
 tempered extra-clear glass


POWER SUPPLY UNIT remote power supply required, not included

MOUNTING surface mounted (ground)

ACCESSORIES see accessories page

NOTES non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request



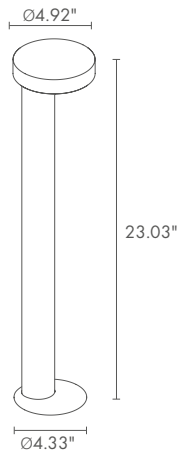

PLIN 5.1



CB



5.51 lbs IP65 IK07

8W 24VDC h 23.03 in

PN51100 **A E** White
PN51100 **A F** Grey
PN51100 **A H** Anthracite
PN51100 **A T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

asymmetrical

488 lm (3000K)

173 lm (3000K)

1 power LED
 3-step MacAdam, 50000h L90 B10 (Ta 25°C)


head in aluminum, column in stainless steel
 screen in serigraphed and transparent,
 tempered extra-clear glass

remote power supply required, not included

surface mounted (ground)

see accessories page

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

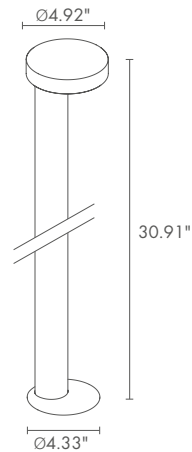

PLIN 5.2



CB



6.83 lbs IP65 IK07

8W 24VDC h 30.91 in

PN52100 **A E** White
PN52100 **A F** Grey
PN52100 **A H** Anthracite
PN52100 **A T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

asymmetrical

488 lm (3000K)

173 lm (3000K)

1 power LED
 3-step MacAdam, 50000h L90 B10 (Ta 25°C)

head in aluminum, column in stainless steel
 screen in serigraphed and transparent,
 tempered extra-clear glass


remote power supply required, not included

surface mounted (ground)

see accessories page

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request



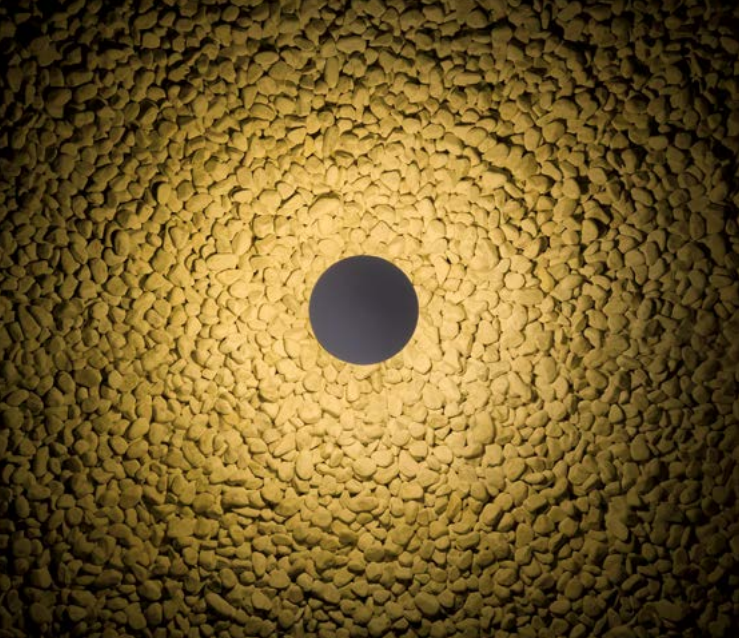

^
PLIN 6.1
2200K, 14W, grey




PLIN 6.0

LED TECH 4.41 lbs IP65 IK07
PID


POWER / MODEL CODE	14W 24VDC h 11.22 in
	PN60100000 OA E White PN60100000 OA F Grey PN60100000 OA H Anthracite PN60100000 OA T Cor-ten
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical circular

LUMEN OUTPUT AT SOURCE	1560 lm (3000K)
DELIVERED LUMEN OUTPUT	1160 lm (3000K)
NO. AND TYPE OF LED	8 power LED 2-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	head in aluminum, column in stainless steel screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ground)
ACCESSORIES	see accessories page
NOTES	non-standard heights available on request Casambi-compatible version, controllable with the Casambi app, available on request



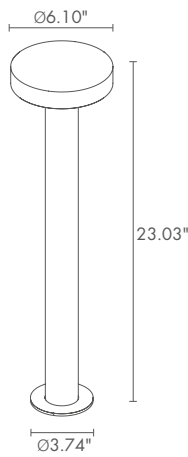

PLIN 6.1



14W 24VDC h 23.03 in
PN61100000 **OA E** White
PN61100000 **OA F** Grey
PN61100000 **OA H** Anthracite
PN61100000 **OA T** Cor-ten

N - 2200K
F - 2700K
5 - 3000K
9 - 4000K

asymmetrical circular

1560 lm (3000K)

1160 lm (3000K)

8 power LED
 2 step MacAdam, 60000h L90 B10 (Ta 25°C)


head in aluminum, column in stainless steel
 screen in serigraphed and transparent,
 tempered extra-clear glass

remote power supply required, not included

surface mounted (ground)

see accessories page

non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

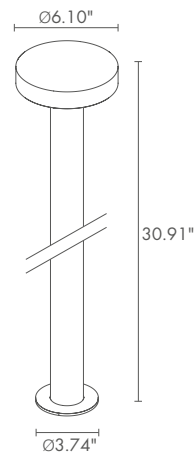

PLIN 6.2



14W 24VDC h 30.91 in
PN62100000 **OA E** White
PN62100000 **OA F** Grey
PN62100000 **OA H** Anthracite
PN62100000 **OA T** Cor-ten

N - 2200K
F - 2700K
5 - 3000K
9 - 4000K

asymmetrical circular

1560 lm (3000K)

1160 lm (3000K)

8 power LED
 2 step MacAdam, 60000h L90 B10 (Ta 25°C)

head in aluminum, column in stainless steel
 screen in serigraphed and transparent,
 tempered extra-clear glass

remote power supply required, not included

surface mounted (ground)

see accessories page


non-standard heights available
 on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request



POSITIONING DIAGRAMS


PLIN 1.0

A - Diffuse

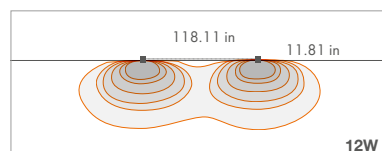


PLIN 1.1

A - Diffuse

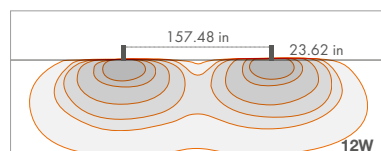


PLIN 1.2

A - Diffuse

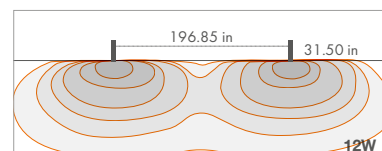


PLIN 2.0

A - Asymmetrical diffuse

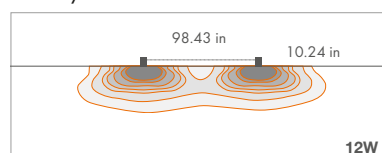


PLIN 2.1

A - Asymmetrical diffuse

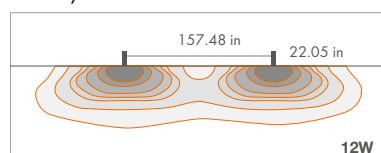


PLIN 2.2

A - Asymmetrical diffuse

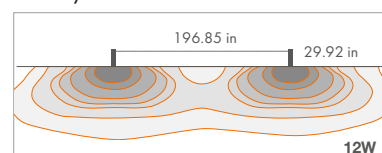


PLIN 4.0

D - Diffuse

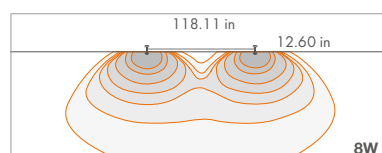


PLIN 4.1

D - Diffuse

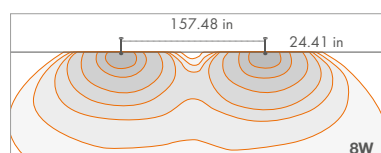


PLIN 4.2

D - Diffuse

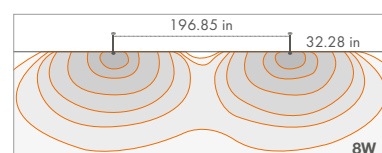


PLIN 5.0

A - Asymmetrical

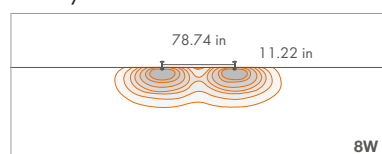


PLIN 5.1

A - Asymmetrical

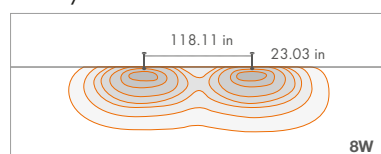


PLIN 5.2

A - Asymmetrical

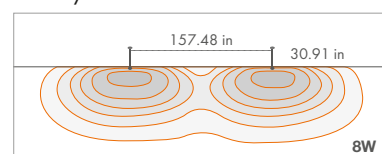


PLIN 6.0

A - Asymmetrical circular

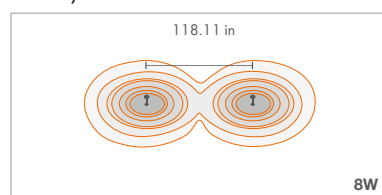


PLIN 6.1

A - Asymmetrical circular

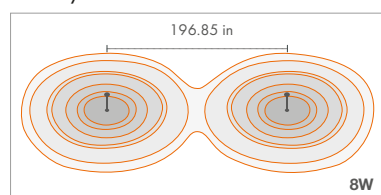

PLIN 6.2

A - Asymmetrical circular

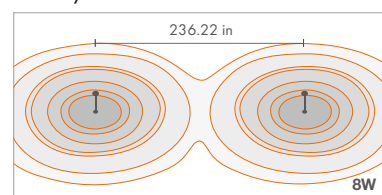



ACCESSORIES AND POSITIONING DIAGRAMMS

ACCESSORIES FOR INSTALLATION



WPA00

Spike for installation in the ground
(Plin 4 / 5 / 6)


PLIN 4.0
3000K, 8W, anthracite



OUTDOOR BOLLARDS


PLIN 1.0

A - Diffuse

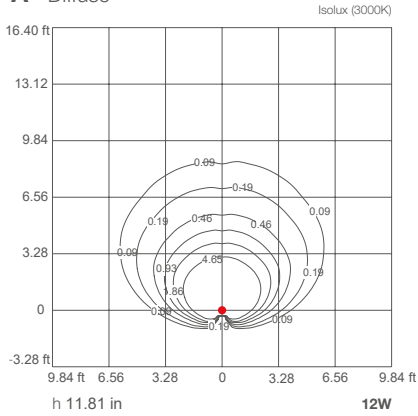


PLIN 1.1

A - Diffuse

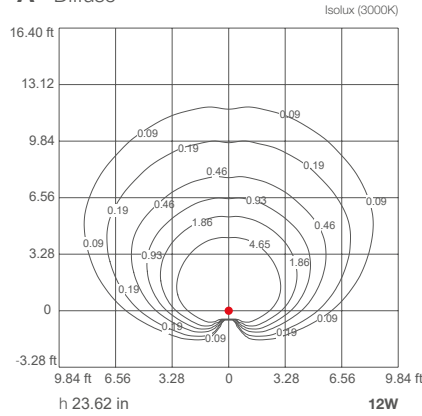


PLIN 1.2

A - Diffuse

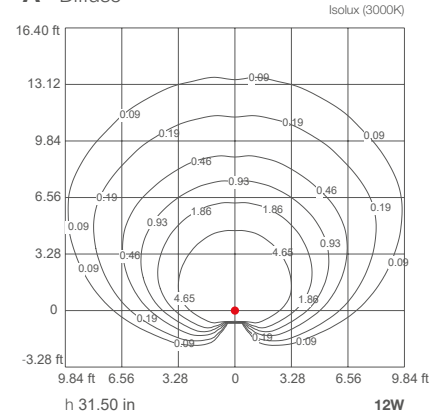


PLIN 2.0

A - Asymmetrical diffuse

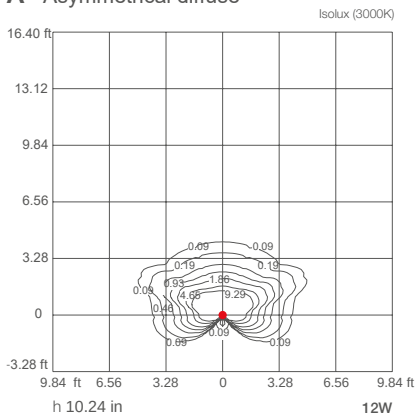


PLIN 2.1

A - Asymmetrical diffuse

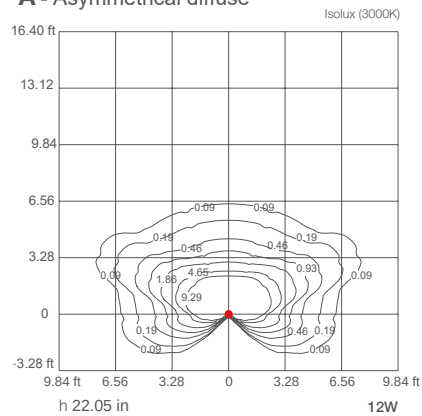


PLIN 2.2

A - Asymmetrical diffuse

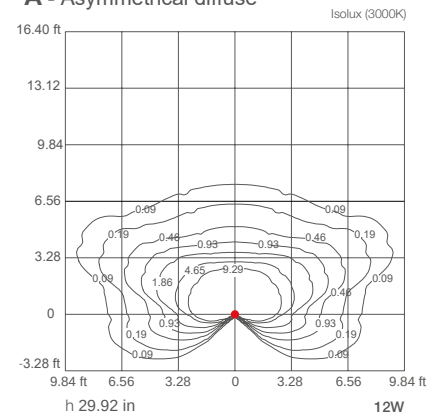


PLIN 3.0

A - Asymmetrical diffuse

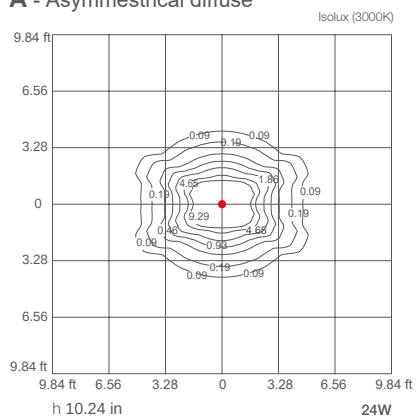


PLIN 3.1

A - Asymmetrical diffuse

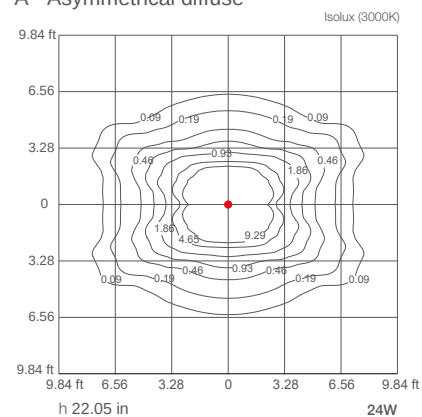

PLIN 3.2


A - Asymmetrical diffuse

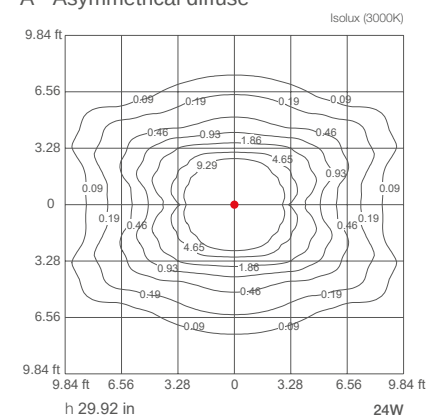

PLIN 4.0

D - Diffuse


Isolux (3000K)

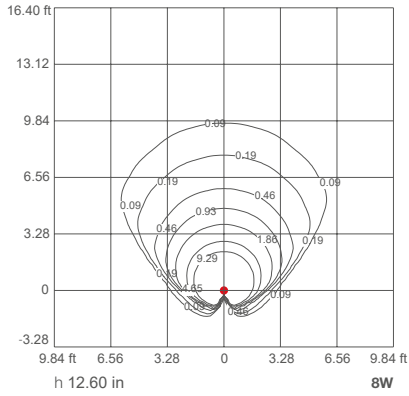

PLIN 4.1

D - Diffuse


Isolux (3000K)

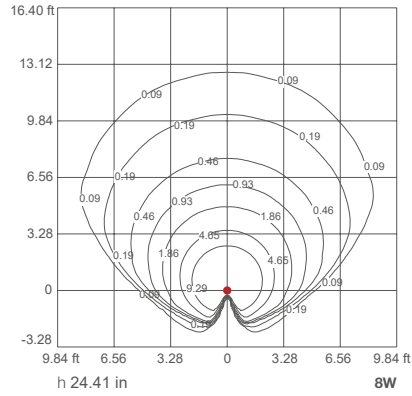

PLIN 4.2

D - Diffuse


Isolux (3000K)

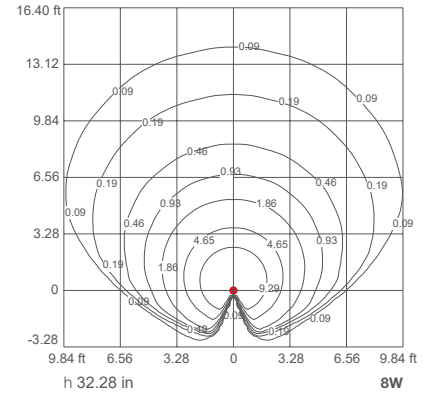

PLIN 5.0

A - Asymmetrical


Isolux (3000K)

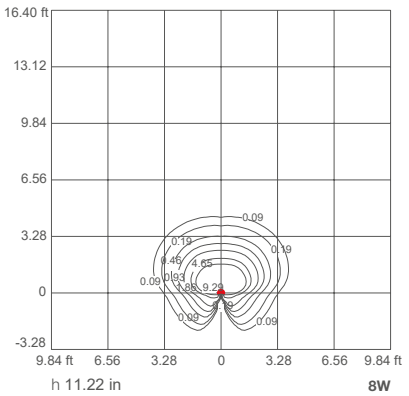

PLIN 5.1

A - Asymmetrical


Isolux (3000K)

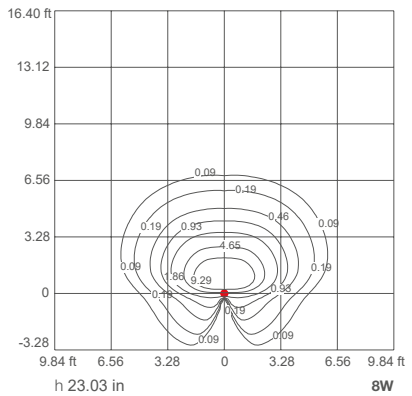

PLIN 5.2

A - Asymmetrical


Isolux (3000K)

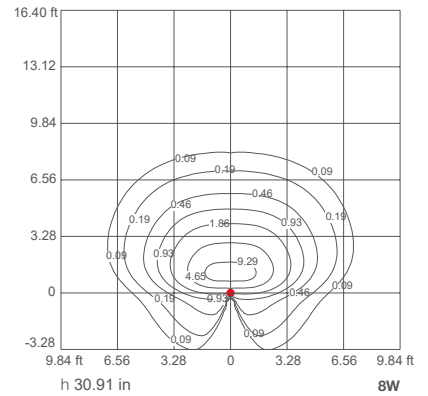

PLIN 6.0

A - Asymmetrical


Isolux (3000K)

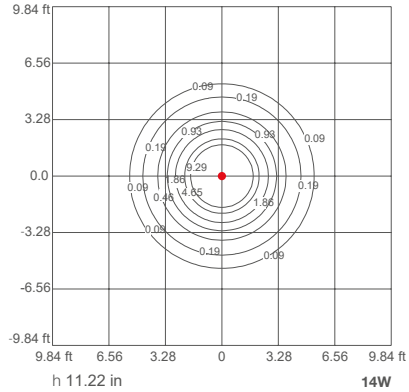

PLIN 6.1

A - Asymmetrical

Isolux (3000K)

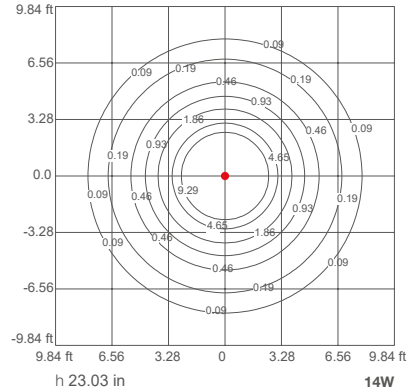

PLIN 6.2

A - Asymmetrical

Isolux (3000K)

