

POLARIS

A DOME OF LIGHT
BUT ALSO AN INSPECTION
HATCH


SUPERFUTUREDESIGN*

Indoor Recessed



Polaris

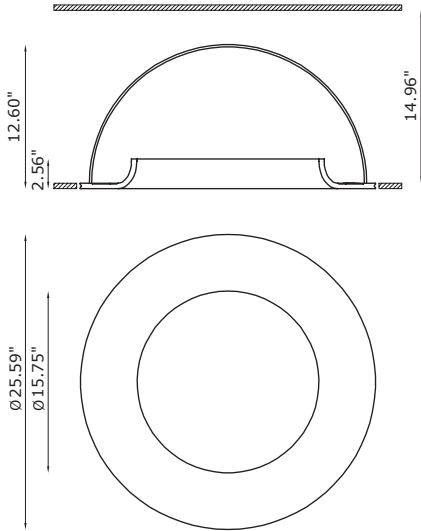

A/C



OTHER AVAILABLE CODES

BU6978.40.AC	<i>lens</i> <i>light color</i>	diffuse 4000K (on request)
--------------	-----------------------------------	-------------------------------

TECHNICAL FEATURES

Code	BU6978.AC
Type	Downlight 90° 
Material	AC: AirCoral®
Absorption capacity*	226.47 ft²
Weight	22.05 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Constant voltage driver (included)
Cut out for plasterboard	Ø 25.98 in
Lamp type	LED 12V 
Lamp wattage	1 × 24W
Luminous efficacy	1 × 1800 lm - 3000K
Light distribution	Indirect
Fitting	-
Light color	White 3000K
Light hole	Ø 15.75 in
Voltage connection	12V - 50/60Hz
CRI	>90
Note	Can be used as a trap door for inspecting the false ceiling.  DALI driver on request. Other available light colors: 2700K (on request), 4000K (on request).

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²