

Technical features

IP66 IK10




601501P

PROMENADE ROUND 01

27.56" height bollard, round shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

AC053 - Base Plate

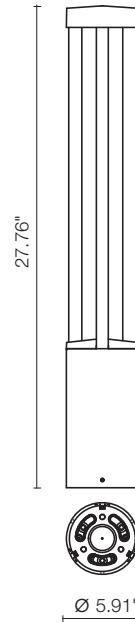

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	<input checked="" type="checkbox"/>	360°	2,900
4000°K neutral-white			
cob led	<input checked="" type="checkbox"/>	360°	3,100
111.54			
119.23			

Finish color options:

 Textured Grey RAL 9006

 Anthracite Grey RAL 7016

 Matt Black (on request)

Technical data

Wattage	26W
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 1 COB CREE "CXB 1520" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M16 rubber grommet
Power cable:	not included
Gross weight	14.33 lbs






601502P

PROMENADE ROUND 02

39.37" height bollard, round shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

AC053 - Base Plate

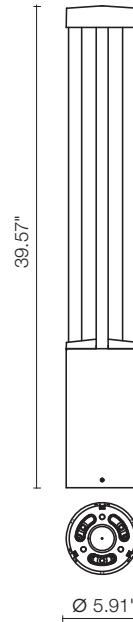

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	<input checked="" type="checkbox"/> 360°	2,900	111.54
4000°K neutral-white			
cob led	<input checked="" type="checkbox"/> 360°	3,100	119.23

Finish color options:

 Textured Grey
RAL 9006

 Anthracite Grey
RAL 7016

 Matt Black
(on request)

Technical features

 IP66  IK10

Technical data

Wattage	26W
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 1 COB CREE "CXB 1520" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M16 rubber grommet
Power cable:	not included
Gross weight	15.43 lbs



Technical features

IP66 IK10




601503P

PROMENADE SQUARE 01

27.56" height bollard, square shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

AC053 - Base Plate

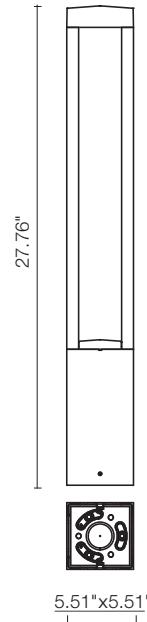

Technical data

Wattage	26W
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 1 COB CREE "CXB 1520" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M16 rubber grommet
Power cable:	not included
Gross weight	14.99 lbs

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	360°	2,900	111.54
4000°K neutral-white			
cob led	360°	3,100	119.23

Finish color options:

 Textured Grey RAL 9006

 Anthracite Grey RAL 7016

 Matt Black (on request)



Technical features

IP66 IK10

Technical data

Wattage	26W
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 1 COB CREE "CXB 1520" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M16 rubber grommet
Power cable:	not included
Gross weight	16.09 lbs


601504P

PROMENADE SQUARE 02

39.37" height bollard, square shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	360°	2,900	111.54
4000°K neutral-white			
cob led	360°	3,100	119.23

Finish color options:

 Textured Grey RAL 9006  Anthracite Grey RAL 7016  Matt Black (on request)

