


# PROMENADE ROUND 02


The Promenade series are outdoor bollards available in a round or square shape with 360° downward light emission. There are 2 different height options for each, and 3 standard finishes available. Anchorage flange plate with threaded bolts included.

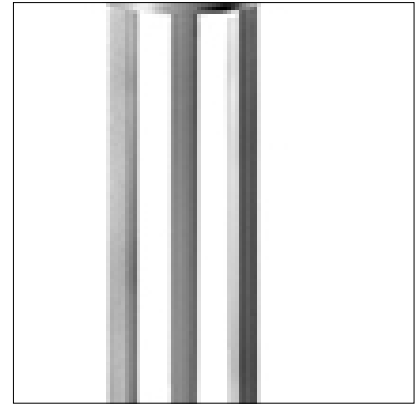

## TECHNICAL DATA

<b>Wattage / Input</b>	26W (120-277VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: High Corrosion Resistance, Die-cast Copper-free Aluminum Lens: Tempered Glass Screws: Stainless Steel Gasket: Silicone Rubber
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B1-U3-G1
<b>Delivered Lumens</b>	2900 lm (3000K)
<b>Efficacy</b>	111.54 lm/W (3000K)
<b>Optics</b>	360°
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black
<b>Fixture Dimensions</b>	Ø5.91" l x 39.57" h
<b>Fixture Weight</b>	15.43 lbs
<b>LED Source</b>	1 COB CREE "CXB 1520" LED
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK10

Fixture Dimensions

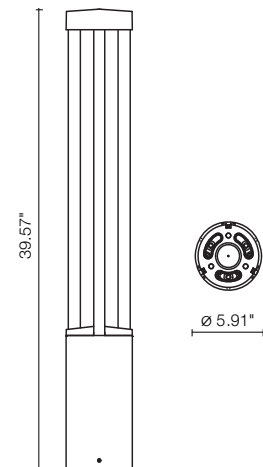

**BASE PLATE REQUIRED - See Page 2**

## ORDERING INFORMATION

Example: 601502P-30K-360-AG.

601502P	-		-	360	-	
Model No.	CCT	Optics	Finish			
601502P	30K - 3000K 40K - 4000K	360 - 360°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black			

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES Installation




**AC053**  
Base Plate  
(REQUIRED)

## PHOTOMETRIC DATA

*Note: all Photometry is 3000K*

Maximum Candela = 937.5

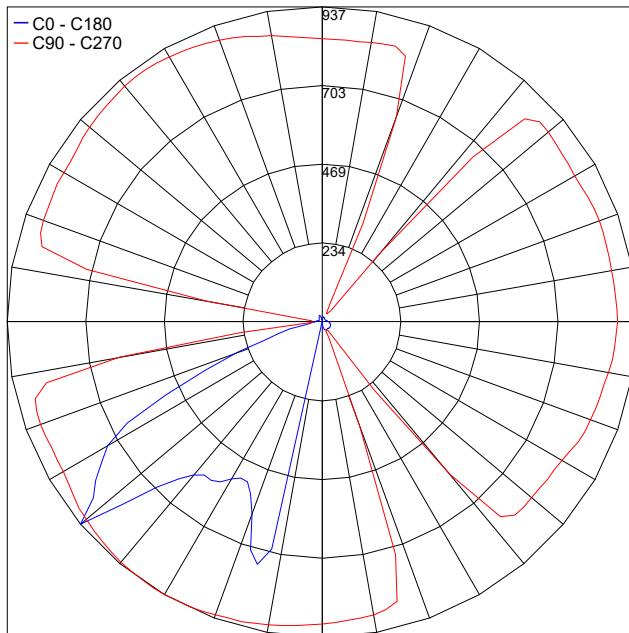

PHOTOMETRIC FILENAME : PROMENADE ROUND 02 601502P.IES

Job Name/Date:

Fixture Type Designation: