

# QSI DOWNLIGHT

The QSI Downlight is a vandal resistant, IP65 wet label fixture that is IC and Chicago Plenum rated. It is available in white light or red light for darkrooms and a 25° x 25°. **NOT** suitable for steam rooms. B.A.B.A. Complaint.



**MADE IN THE U.S.A.**

Fixture Dimensions  
(see drawing on page 2)

## TECHNICAL DATA

<b>Wattage</b>	26W (Static White), 20W (Red)
<b>Power Supply</b>	Integral 120-277VAC or 347VAC Red: 1000mA
<b>Construction</b>	Body: 20 Ga. Cold Rolled Steel (Powder Black Finish) Neck: Die Cast Aluminum Lens: 3/16" Thick Clear or Opal Polycarbonate
<b>CCT</b>	2700K, 3000K, 3500K, 4000K, Red
<b>CRI</b>	>80
<b>Delivered Lumens</b>	2632 lm (3000K)
<b>Efficacy</b>	101.2 lm/W
<b>Optics</b>	25° x 25°
<b>Finishes</b>	5 Standard, plus 4 Marine Grade. See Below.
<b>Fixture Dimensions</b>	5.6" x 5.6" - 12.6 l x 8.06 h (see drawing on page 2)
<b>Aperture</b>	3.6" x 3.6"
<b>LED Source</b>	LED COB, RED 620-630 nm
<b>Lumen Maintenance</b>	L70>50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1x2 MacAdam Ellipse (1x2 SDCM)
<b>IP Rating</b>	IP65

## ORDERING INFORMATION




Example: QSI-L26-40-25-4-11-C-C-0.

QSI-L26	-		-	25	-		-		-		-		-	
Model #	CCT	Optics	Body	Finish	Lens	Dimming	Options							
QSI-L26	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K RD - Red	25 - 25°x25°	4 - Fully Recessed IC Rated C - Fully Recessed Chicago Plenum V - Concrete Pour	11 - White Suede 02 - Black Suede 18 - Tex. Bronze TS - Silver <i>Add prefix "M" to above colors for Marine Grade Clear Overcoat</i> PN - Polished Nickel <i>Marine Grade Clear Overcoat NOT available on Polished Nickel</i>	C - Clear X - Opal R - Assym Spread	C - Integral 120-277VAC 0-10V Dimming 2 - 347VAC w/ 0-10V Dimming R - Red LED 1000mA <i>'R' for RD - Red option only</i>	0 - None 4 - One Circuit Fusing 8 - Special Screws (Please specify) H - Honeycomb Louver							


Job Name/Date:

Fixture Type Designation:

## FIXTURE DIMENSIONS

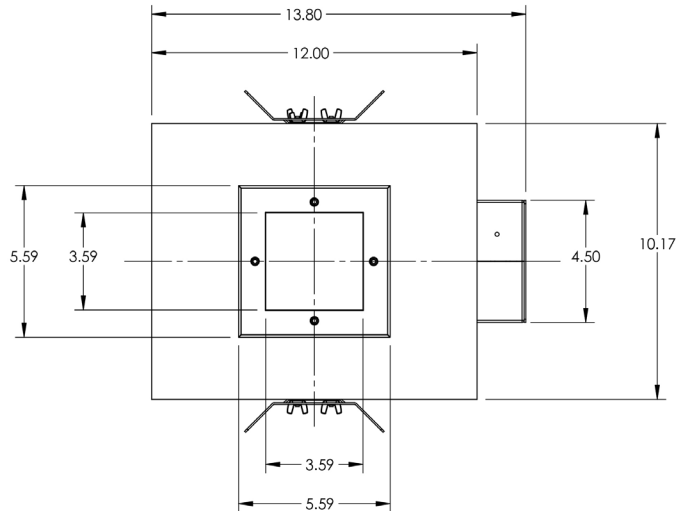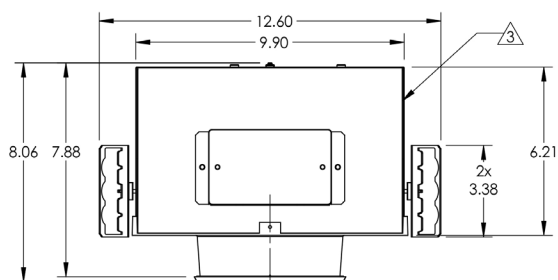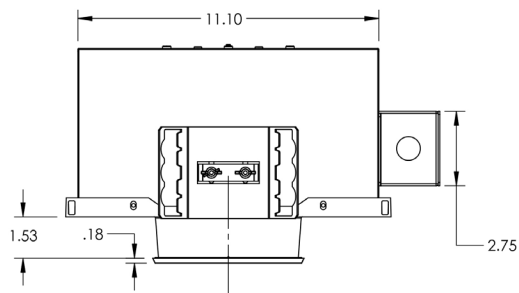

## PHOTOMETRIC DATA

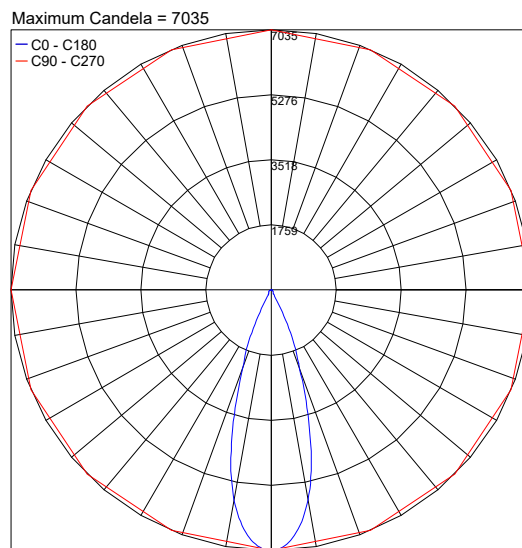

PHOTOMETRIC FILENAME : QSI 3000K 25°X25° IC-RATED (LLIA001367-003A).IES

Job Name/Date:

Fixture Type Designation: