

#### Technical features

IP66

IK10

0-10V

NEW




101607P

## QUBO MAXI HP

Designed by  
NAVA + AROSIO

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 6 x CREE "XHP35" LED. IP66 rating.

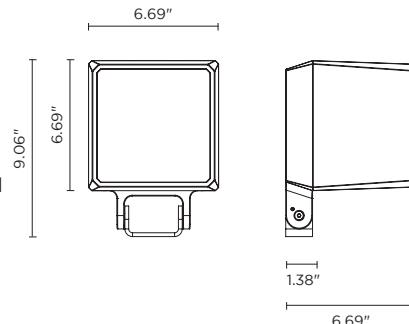

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	4°	4,300	113.15
high-power led	10°	4,260	112.10
high-power led	28°	4,210	110.79
<b>4000°K neutral-white</b>			
high-power led	4°	4,400	115.79
high-power led	10°	4,360	114.74
high-power led	28°	4,310	113.42

#### Finish color options:


 Textured Grey  
RAL 9006

 Anthracite Grey  
RAL 7016

 Matte Black  
(on request)

#### Technical data

Wattage	38 WATT
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	6 x CREE "XHP35" LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	3.28' power cable included
Gross weight	9.92 lbs

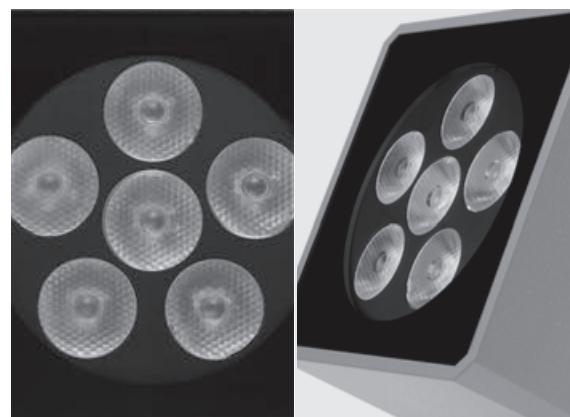

## OTHER VIEW

---




## OPTIONAL

---

AC044  
SPIKE



AC074  
HONEYCOMB LOUVER



AC078  
ANTI-GLARE VISOR



AC038  
TREE STRAP



## OPTIONAL

---

LUMINAIRE SUITABLE  
FOR POLE MOUNTING  
IN SINGLE OR MULTIPLE  
COMBINATIONS

