

#### Technical features

IP66 IK10 0-10V

DALI NEW




101603P

## QUBO MEDIUM COB

Designed by  
NAVA + AROSIO

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 1 COB CREE "CXB 1512" LED. IP66 rating.

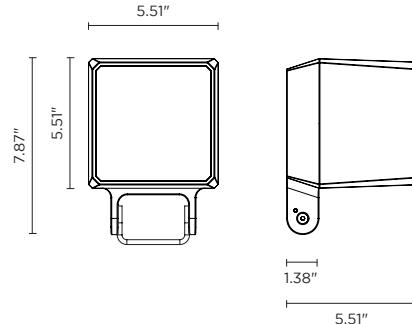

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
cob led	14°	1,900	118.75
cob led	35°	1,813	113.31
cob led	55°	1,722	107.62
<b>4000°K neutral-white</b>			
cob led	14°	2,000	125.00
cob led	35°	1,900	118.75
cob led	55°	1,805	112.81

#### Finish color options:

 Textured Grey  
RAL 9006

 Anthracite Grey  
RAL 7016

 Matte Black  
(on request)

#### Technical data

Wattage	16 WATT
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CREE "CXB 1512" LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	3.28' power cable included
Gross weight	6.83 lbs



## OTHER VIEW

---




## OPTIONAL

---

AC044  
SPIKE



AC073  
HONEYCOMB LOUVER



AC077  
ANTI-GLARE VISOR



AC038  
TREE STRAP



## OPTIONAL

---

LUMINAIRE SUITABLE  
FOR POLE MOUNTING  
IN SINGLE OR MULTIPLE  
COMBINATIONS

