

Technical features

IP66

IK10

NEW




101601P

QUBO MICRO HP

Designed by
NAVA + AROSIO

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Remote 24VDC power supply needed, with 1 x CREE "XHP35" LED. IP66 rating.

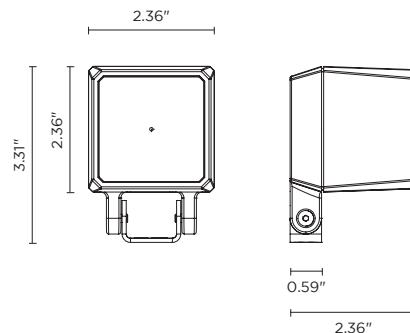


light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	4°	510	85.00
high-power led	10°	489	81.50
high-power led	28°	474	79.00
4000°K neutral-white			
high-power led	4°	520	86.67
high-power led	10°	499	83.17
high-power led	28°	484	80.67

Finish color options:

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)

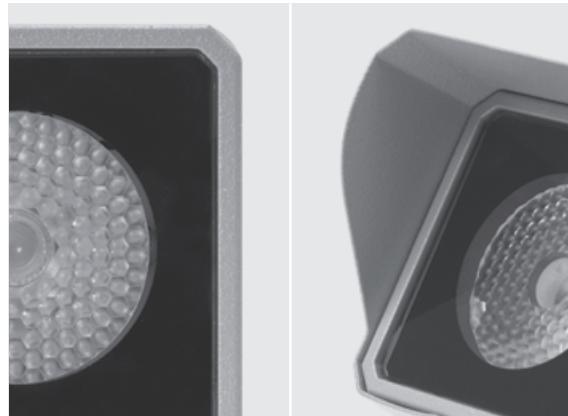

OTHER VIEW



OPTIONAL

AC044
SPIKE

AC071
HONEYCOMB LOUVER

AC075
ANTI-GLARE VISOR

AC038
TREE STRAP

