

Technical features

IP66 IK10 DMX NEW




101605RGBWP

QUBO MINI DMX RGBW

Designed by
NAVA + AROSIO

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, moulded silicone gaskets, with screws in stainless steel. Remote 24VDC power supply needed, DMX driver integrated; with 1 x CREE "XML" RGBW LED. IP66 rating.

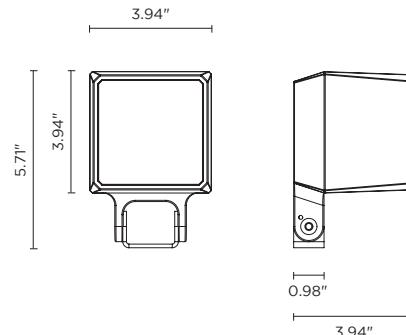

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW			
high-power led	12°	160	35.55
high-power led	25°	152	33.78
high-power led	35°	145	32.23

Finish color options:

 Textured Grey
RAL 9006

 Anthracite Grey
RAL 7016

 Matte Black
(on request)

DMX ACCESSORIES

CONTROLLERS, SPLITTERS, ETC...

To be defined together with puk technical department, according to project specifications and after providing installation details.

Technical data

Wattage	4.5 WATT
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x CREE "XML" COLOR RGBW LED
Screws	Stainless steel
DMX	DMX interface integrated
Remote driver	Constant voltage 24VDC remote driver needed
Gasket	Silicone rubber
Glass	Tempered
Power cable	3.28' power cable included
DMX cable	DMX in & DMX out cables included
Gross weight	2.87 lbs


AC044
SPIKE



AC076
ANTI-GLARE VISOR



AC072
HONEYCOMB LOUVER



AC038
TREE STRAP

