

Qubo

Nava + Arosio

designplan





PRODUCT WEIGHT 1.54 lbs

IK10 IP66 5 YEARS

Qubo Micro HP

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium base and head, tempered safety glass, moulded silicone gaskets, with screws in stainless steel. Remote 24VDC power supply needed, with 1 x CREE "XHP35" LED. IP66 rating.

Code Example

101601 . 27 . 04 . 01 . 0

Accessories p. 23

101601
6W

CCT		Beam Angle		lm	lm/w
.27	2700°K	**.04**	4°	465	77.50
		.10	10°	450	75.00
		.28	28°	485	80.83
		.55	55°	383	63.83
.30	3000°K	**.04**	4°	510	85.00
		.10	10°	489	81.50
		.28	28°	474	79.00
		.55	55°	403	67.15
.40	4000°K	**.04**	4°	520	86.67
		.10	10°	499	83.17
		.28	28°	484	80.67
		.55	55°	411	68.57

Finish

.01	RAL 9006
.02	RAL 7016
.03	RAL 9005

Dimming

.0 ON/OFF







PRODUCT WEIGHT 2.87 lbs

DALI IK10 IP66 5 YEARS

Qubo Mini COB

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 1 COB CREE “CXB 1310” LED. IP66 rating.

Code Example

|**101602**|.|**27**|.|**14**|.|**01**|.|**0**|

See Accessories Page

101602
10W

CCT		Beam Angle		lm	lm/w
.27	2700°K	**.14**	14°	1045	104.5
		.35	35°	1007	100.7
		.55	55°	950	95
.30	3000°K	**.14**	14°	1.100	110
		.35	35°	1.060	106
		.55	55°	1.000	100
.40	4000°K	**.14**	14°	1.200	120
		.35	35°	1.140	114
		.55	55°	1.083	108

Finish	
.01	RAL 9006
.02	RAL 7016
.03	RAL 9005

Dimming	
.0	ON/OFF
.D	DALI







PRODUCT WEIGHT 2.87 lbs

DALI IK10 IP66 5 YEARS

Qubo Mini HP

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 1 x CREE “XHP35” LED. IP66 rating.

Code Example

|**101605**|.|**27**|.|**04**|.|**01**|.|**0**|

See Accessories Page

101605
8W

CCT		Beam Angle		lm	lm/w
.27	2700°K	**.04**	4°	629	78.62
		.10	10°	610	76.25
		.28	28°	656	82.00
		.55	55°	519	64.88
.30	3000°K	**.04**	4°	690	86.25
		.10	10°	662	82.75
		.28	28°	642	80.25
		.55	55°	546	68.21
.40	4000°K	**.04**	4°	703	87.88
		.10	10°	676	84.50
		.28	28°	656	82.00
		.55	55°	558	69.70

Finish	
.01	RAL 9006
.02	RAL 7016
.03	RAL 9005

Dimming	
.0	ON/OFF
.D	DALI







PRODUCT WEIGHT 2.87 lbs

DMX · Full RGB · IK10 · IP66 · 5 YEARS

Qubo Mini DMX RGBW

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Remote 24VDC power supply needed, DMX driver integrated; with 1 x CREE "XML" RGBW LED. IP66 rating.

Code Example

101605 . RW . 12 . 01 . X

See Accessories Page

101605
4.5W

CCT		Beam Angle		lm	lm/w	Finish		Dimming	
.RW	RGBW	**.12**	12°	160	35.55	**.01**	RAL 9006	**.X**	DMX
		.25	25°	152	33.78	**.02**	RAL 7016		
		.35	35°	145	32.23	**.03**	RAL 9005		





PRODUCT WEIGHT 6.83 lbs

1-10V · DALI · IK10 · IP66 · 5 YEARS

Qubo Medium COB

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 1 COB CREE "CXB 1512" LED. IP66 rating.

Code Example

101603 . 27 . 14 . 01 . 0

See Accessories Page

101603
16W

CCT		Beam Angle		lm	lm/w	Finish		Dimming	
.27	2700°K	**.14**	14°	1805	112.81	**.01**	RAL 9006	**.0**	ON/OFF
		.35	35°	1722	107.62	**.02**	RAL 7016	**.1**	1-10 V
		.55	55°	1636	102.25	**.03**	RAL 9005	**.D**	DALI
.30	3000°K	**.14**	14°	1.900	118.75				
		.35	35°	1.813	113.31				
		.55	55°	1.722	107.62				
.40	4000°K	**.14**	14°	2.000	125.00				
		.35	35°	1.900	118.75				
		.55	55°	1.805	112.81				



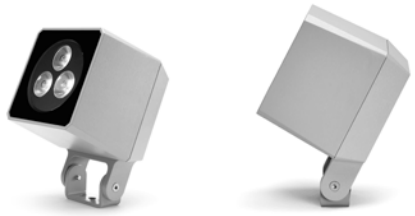

PRODUCT WEIGHT 6.83 lbs

1-10V DALI IK10 IP66 5 YEARS

Qubo Medium HP

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 3 x CREE “XHP35” LED. IP66 rating.

Code Example

101606 . 27 . 04 . 01 . 0

See Accessories Page

101606
20W

CCT		Beam Angle		lm	lm/w
.27	2700°K	**.04**	4°	1900	95.00
		.10	10°	1853	92.65
		.28	28°	1948	97.4
		.55	55°	1575	78.75
.30	3000°K	**.04**	4°	2.050	102.50
		.10	10°	2.000	100.00
		.28	28°	1.950	97.50
		.55	55°	1.658	82.88
.40	4000°K	**.04**	4°	2.100	105.00
		.10	10°	2.050	102.50
		.28	28°	2.000	100.00
		.55	55°	1.700	85.00

Finish	
.01	RAL 9006
.02	RAL 7016
.03	RAL 9005

Dimming	
.0	ON/OFF
.1	1-10 V
.D	DALI





PRODUCT WEIGHT 6.83 lbs

DMX Full RGB DALI IK10 IP66 5 YEARS

Qubo Medium DMX RGBW

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, DMX driver integrated; with 3 x CREE “XML” RGBW LED. IP66 rating.

Code Example

101606 . RW . 12 . 01 . D

See Accessories Page

101606
14W

CCT		Beam Angle		lm	lm/w
.RW	RGBW	**.12**	12°	480	34.28
		.25	25°	468	33.43
		.35	35°	457	32.65

Finish	
.01	RAL 9006
.02	RAL 7016
.03	RAL 9005

Dimming	
.D	DALI
.X	DMX







PRODUCT WEIGHT 9.92 lbs

1-10V DALI IK10 IP66 5 YEARS

Qubo Maxi COB

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 1 COB CREE"CXB 2540" LED. IP66 rating.

Code Example

|101604|.|27|.|14|.|01|.|0|

See Accessories Page

101604
42W

CCT		Beam Angle		lm	lm/w
.27	2700°K	**.14**	14°	4703	111.98
		.35	35°	4514	107.48
		.55	55°	4332	103.14
.30	3000°K	**.14**	14°	4.950	117.85
		.35	35°	4.752	113.14
		.55	55°	4.560	108.57
.40	4000°K	**.14**	14°	5.265	125.36
		.35	35°	5.000	119.05
		.55	55°	4.770	113.57

Finish	
.01	RAL 9006
.02	RAL 7016
.03	RAL 9005

Dimming	
.0	ON/OFF
.1	1-10 V
.D	DALI







PRODUCT WEIGHT 9.92 lbs

1-10V DALI IK10 IP66 5 YEARS

Qubo Maxi HP

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 6 x CREE "XHP35" LED. IP66 rating.

Code Example

|101607|.|27|.|04|.|01|.|0|

See Accessories Page

101607
38W

CCT		Beam Angle		lm	lm/w
.27	2700°K	**.04**	4°	4047	106.50
		.10	10°	4000	105.26
		.28	28°	4085	107.50
		.55	55°	3400	89.47
.30	3000°K	**.04**	4°	4.300	113.15
		.10	10°	4.260	112.10
		.28	28°	4.210	110.79
		.55	55°	3.579	94.17
.40	4000°K	**.04**	4°	4.400	115.79
		.10	10°	4.360	114.74
		.28	28°	4.310	113.42
		.55	55°	3.664	96,41

Finish	
.01	RAL 9006
.02	RAL 7016
.03	RAL 9005

Dimming	
.0	ON/OFF
.1	1-10 V
.D	DALI







PRODUCT WEIGHT 9.92 lbs

DMX | Full RGB | DALI | IK10 | IP66 | 5 YEARS

Qubo Maxi DMX RGBW

Floodlight for outdoor installation on a façade/wall, with U shape fixing bracket allowing vertical adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets, with screws in stainless steel. Built-in LED driver, DMX driver integrated; with 6 x CREE "XML" RGBW LED. IP66 rating.

Code Example

101607 . RW . 12 . 01 . D

See Accessories Page

	CCT	Beam Angle		lm	lm/w	Finish		Dimming	
101607	**.RW** RGBW	**.12**	12°	1.000	35.71	**.01**	RAL 9006	**.D**	DALI
28W		**.25**	25°	992	35.43	**.02**	RAL 7016	**.X**	DMX
		.35	35°	981	35.04	**.03**	RAL 9005		

INTEGRATED ACCESSORIES

101601 . 27 . 04 . 01 . 0 . __

Built-in accessories to be requested when ordering example 101601.27.04.01.0.**HC**



.HC

HONEYCOMB

A honeycomb structure designed to shield the light beam, reduce glare, and eliminate direct exposure to the light source. **Compatible for all products of the series.**



LUMINAIRE SUITABLE FOR POLE MOUNTING IN SINGLE OR MULTIPLE COMBINATIONS

ACCESSORIES NOT INCLUDED

Accessories to be ordered separately.



AC044

SPIKE

Ground-mounted installation accessory. **Compatible for all products of the series.**



GLARE SHIELD

Minimizes glare and optimizes beam direction for precise lighting.
Available for:

AC075
FOR ALL QUBO **MICRO** ITEM

AC076
FOR ALL QUBO **MINI** ITEMS

AC077
FOR ALL QUBO **MEDIUM** ITEMS

AC078
FOR ALL QUBO **MAXI** ITEMS



AC038

TREE STRAP

Fastening system for securing lighting fixtures to trees. **Compatible for all products of the series.**