



INDOOR RECESSED DOWNLIGHTS FALSE CEILINGS IN RETAIL SPACES AND PRIVATE HOMES



SINGLE BEAM



DOUBLE BEAM



3 BEAMS

2700K 3000K 4000K 5000K blue RGB




QUAD 6.1
6W 500mA



QUAD 6.2
12W 500mA



QUAD 6.3
18W 500mA

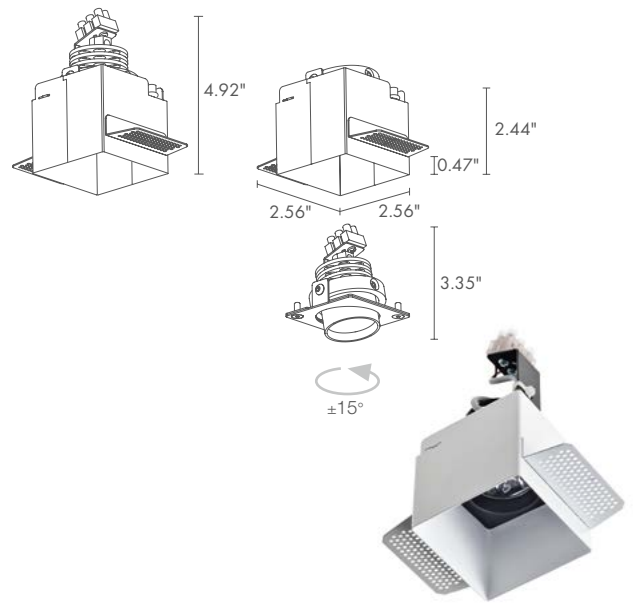


Required outer casing, not included

QUAD 6.1

6.50 in x 6.50 in
H 5.91 in

2.56x2.56 in



POWER / MODEL CODE

6W 500mA
QD6132 ■ ■ **B** White
QD6132 ■ ■ **N** Black

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

OPTICS

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

LUMEN OUTPUT AT SOURCE

436 lm (3000K, 500mA)
RGB: 294 lm, R: 108 lm G: 140 lm
B: 46 lm (500mA)

DELIVERED LUMEN OUTPUT

336 lm (3000K, 500mA, 24°)
RGB: 210 lm, R: 77 lm G: 100 lm
B: 33 lm (500mA, 24°)

NO. AND TYPE OF LED

3 power LEDs
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

MATERIAL

body in anodized aluminum
trim in steel

POWER SUPPLY UNIT

remote power supply required, not included

POWER CABLES

terminal block

WIRING

series

MOUNTING

recessed (ceiling)


ACCESSORIES

see accessories page

NOTES

Casambi-compatible version, controllable with the Casambi app, available on request



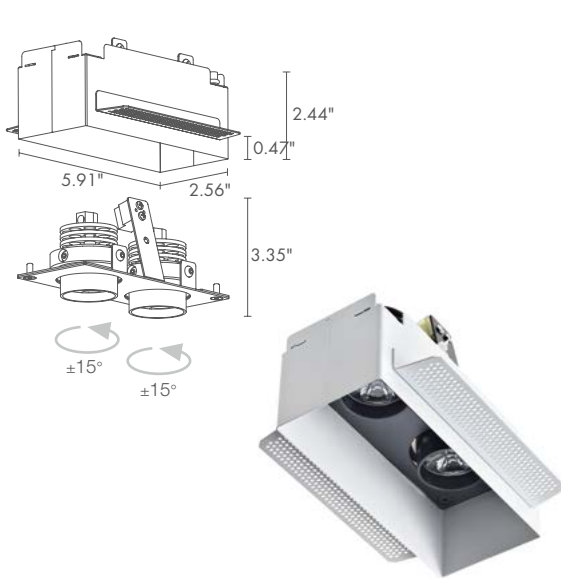

Required outer casing, not included

QUAD 6.2

6.50x9.84 in
H 5.91 in 2.56x5.91 in



max 12W max 500mA
QD6262 ■ ■ **B** White
QD6262 ■ ■ **N** Black

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

872 lm (3000K, 500mA)
RGB: 588 lm, R: 216 lm G: 280 lm
B: 92 lm (500mA)

672 lm (3000K, 500mA, 24°)
RGB: 420 lm, R: 154 lm G: 200 lm
B: 66 lm (500mA, 24°)

6 power LEDs
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

body in anodized aluminum
trim in steel

remote power supply required, not included


terminal block

series

recessed (ceiling)

see accessories page


Casambi-compatible version, controllable with the
Casambi app, available on request

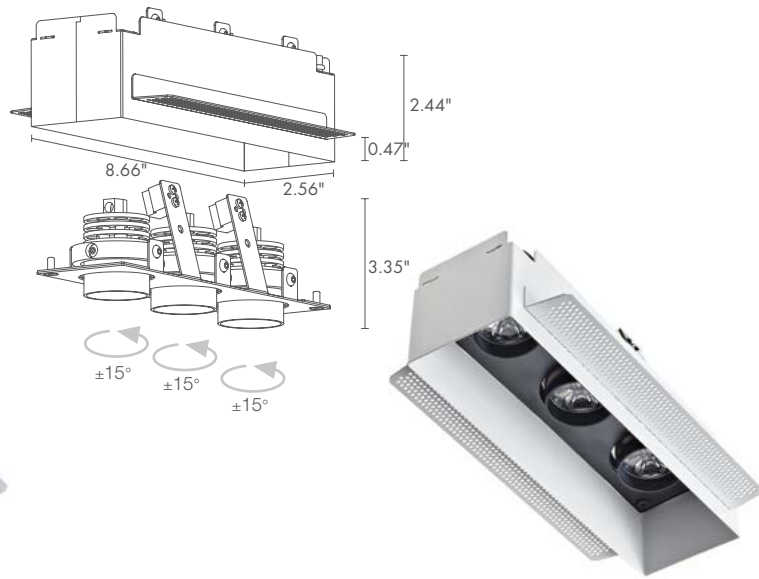

Required outer casing, not included

QUAD 6.3

6.50x12.80 in
H 5.91 in 2.56x8.66 in



max 18W max 500mA
QD6392 ■ ■ **B** White
QD6392 ■ ■ **N** Black

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

1308 lm (3000K, 500mA)
RGB: 882 lm, R: 324 lm G: 420 lm
B: 138 lm (500mA)

1008 lm (3000K, 500mA, 24°)
RGB: 630 lm, R: 231 lm G: 300 lm
B: 99 lm (500mA, 24°)

9 power LEDs
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

body in anodized aluminum
trim in steel

remote power supply required, not included

terminal block

series

recessed (ceiling)

see accessories page

Casambi-compatible version, controllable with the
Casambi app, available on request



White




Black



ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC2001

Outer casing for plasterboard
(Quad 6.1)



WC2002

Outer casing for plasterboard
(Quad 6.2)



WC2003


Outer casing for plasterboard
(Quad 6.3)




OUTDOOR RECESSED

QUAD 6.1

S - 12°

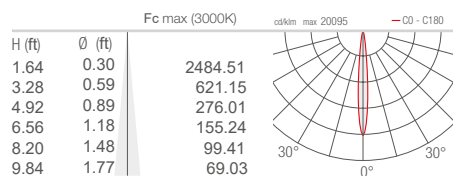

M - 24°

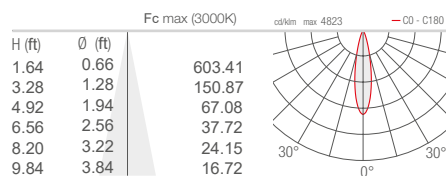

L - 56°

